

# Emergency Range

Installation instructions for JC50327 Emergency LED Twin Spot

**JCC** | a **LEVITON** company


## Warnings & Cautions

- To avoid electric shock, serious injury or property damage, isolate power before installing, removing or servicing the product.
- It is recommended that luminaires are installed by a qualified electrician to ensure the installation complies with the local current wiring regulations.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.
- This product is designed for connection to a 220-240V~ 50/60Hz.
- This product is suitable for indoor use only.
- Read instructions and check that you have all of the tools and accessories required to complete the installation correctly. Isolate power supply before starting installation.
- Do not carry out insulation tests with the product connected to the circuit.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations; which will void the warranty.
- It is recommended that the ambient room temperature should not exceed 30°C.

## INSTALLATION

ENGLISH

2 x 2.5W 220-240V~ 50/60Hz - Class I Ⓛ  
Colour temp: 6000K Ra: 77



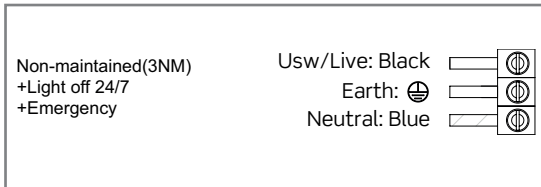


## Installation procedure

- Remove the cover on the front and remove the fixing screw, then unclip the cover to access the interior.
- This fitting is suitable for installation in any orientation, but is recommended to be fixed to a flat level surface.
- Connect the mains input supply as indicated above. This is a non-maintained fitting and only illuminates when the mains supply is interrupted.
- Connect the emergency battery leads to the circuit board where indicated.
- Replace end cover and secure using the securing screw.
- Switch on mains supply and test for operation (allow 24hrs for batteries to charge).
- Familiarise yourself with the enclosed emergency fittings test record sheet and ensure it is completed as required and left with the end user.

## Function test

- With mains supply on, and green indicator light on, press the Test Button to check function.
- Green indicator light will go off and the fitting will operate in emergency mode.
- Release the button and the indicator light will come on and the fitting will then return to previous operation.

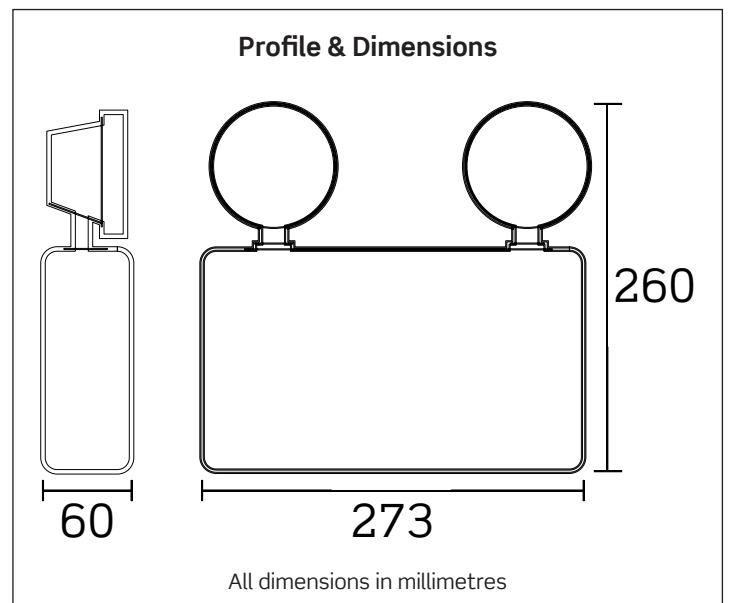

CE UK RoHS Compliant IP20 jcc.co.uk

## Important warranty information

This product is supported by a 2-year standard warranty which will extend to 3 years if registered within the first year of purchase. (2 year on batteries). Please register at [jcc.co.uk/warranty](http://jcc.co.uk/warranty) - Terms and conditions apply.

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis: Product Code/Date Code.

BS EN ISO9001 - 2015 - Registered Firm Certificate No. GB 1552

JCC Lighting Products Ltd. Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS, United Kingdom

Technical Support: +44(0)1243 838986 Customer Services: +44(0)1243 838999

V3\_May\_2021\_GL

