

**Product Code:** CT115F

**Description:** 250V~ 20A 3 Pole Female Push Fit Connector With Loop



### General Information

<b>Dimensions (mm)</b>	79 (W) x 51 (D) x 23 (H)	
<b>Minimum Aperture Diameter (mm)</b>	55	
<b>Finish</b>	Blue	
<b>Materials</b>	Cover: Polycarbonate Terminals: Silver Plated Brass	Base & Terminal Housing: Nylon (PA66) Contact Spring: Stainless Steel
<b>Rated Voltage (V~) (Ue)</b>	250	<b>Frequency (Hz)</b> 50
<b>Resistive Load Rating (A)</b>	20	
<b>Rated Impulse Voltage (kV)</b>	4	
<b>Recommended Inner Core Strip Length (mm)</b>	L & N: 30; E: 38	
<b>Recommended Conductor Strip Length (mm)</b>	12	
<b>Termination Type</b>	Push Fit	
<b>Terminal Capacity - Solid (mm²)</b>	2.5 (Max.)	
<b>Terminal Capacity - Flex (mm²)</b>	2.5 (Max.)	
<b>Termination Layout (Female)</b>	L - E - N - Loop	
<b>Cable Entry (Female)</b>	3 x 2.5mm² Max.	
<b>Cable Restraint Supplied</b>	Yes	
<b>Ingress Protection</b>	IP20	
<b>Operational Temperature (°C)</b>	-5 to +40	
<b>Warranty (Years)</b>	10	

### Additional Information


For cleaning / polishing of products, use only a soft, dry, clean cloth.  
 Ensure that the mains supply is isolated before commencing installation.  
 Always refer to the circuit diagram supplied with the relevant product.  
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
 Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.

Product Code: CT115F

Description: 250V~ 20A 3 Pole Female Push Fit Connector With Loop


## Wiring Example

MALE - CT105M

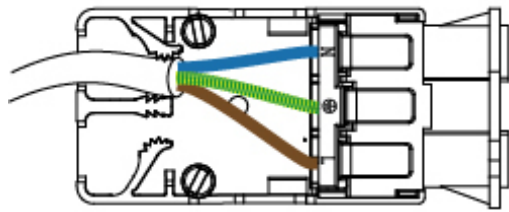

LOAD

FEMALE - CT115F

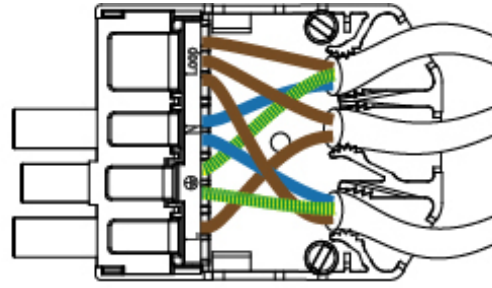

SUPPLY

UK Design Registration: 3015621