

**Product Code:** CT105M

**Description:** 250V~ 20A 3 Pole Male Push Fit Connector



### General Information

<b>Dimensions (mm)</b>	79 (W) x 36 (D) x 24 (H)	
<b>Minimum Aperture Diameter (mm)</b>	40	
<b>Finish</b>	Blue	
<b>Materials</b>	Cover: Polycarbonate Terminals: Silver Plated Brass	Base & Terminal Housing: Nylon (PA66) Contact Spring: Stainless Steel
<b>Rated Voltage (V~) (Ue)</b>	250	<b>Frequency (Hz)</b> 50
<b>Resistive Load Rating (A)</b>	20	
<b>Rated Impulse Voltage (kV)</b>	4	
<b>Recommended Inner Core Strip Length (mm)</b>	L & N: 30; E: 38	
<b>Recommended Conductor Strip Length (mm)</b>	12	
<b>Termination Type</b>	Push Fit	
<b>Terminal Capacity - Solid (mm²)</b>	2.5 (Max.)	
<b>Terminal Capacity - Flex (mm²)</b>	2.5 (Max.)	
<b>Termination Layout (Male)</b>	N - E - L	
<b>Cable Entry (Male Left Entry)</b>	2 x 2.5mm² Max.	
<b>Cable Entry (Male Right Entry)</b>	3 x 2.5mm² Max.	
<b>Cable Restraint Supplied</b>	Yes	
<b>Ingress Protection</b>	IP20	
<b>Operational Temperature (°C)</b>	-5 to +40	
<b>Warranty (Years)</b>	10	


**Additional Information** For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation. Always refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.

Product Code: CT105M

Description: 250V~ 20A 3 Pole Male Push Fit Connector


## Wiring Example

MALE - CT105M

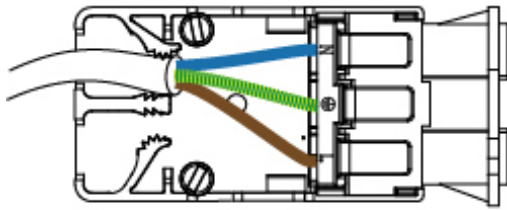


LOAD

FEMALE - CT105F

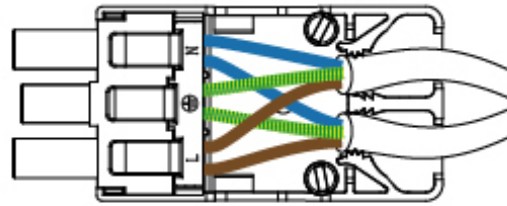


SUPPLY

MALE - CT105M

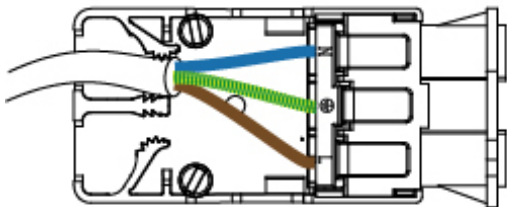

LOAD

FEMALE - CT115F

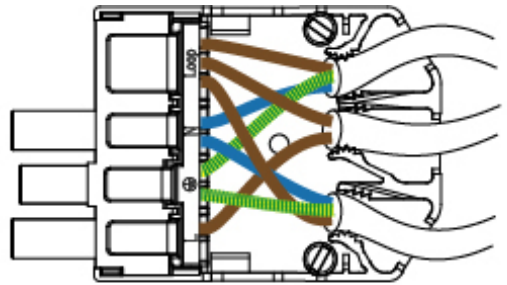

SUPPLY

UK Design Registration: 3015621