

EDITION 7



**FORUM**  
LIGHTING SOLUTIONS



Dear Customer,

Welcome to the latest issue of the Forum Lighting catalogue. With the inclusion of over 150 new lines, this next issue of our brochure illustrates the continued development we've experienced since our inception in 2013.

New lines in our ELECTRALIGHT brand include additions to our very popular 24V LED tape range. The new COB tape offers continuous light across its length and is available in 5m & 50m reels for both 2700k & 4000k colour variations. We've also launched the CCT MECA LED battens, which offer a modern alternative to fluorescent and are available with microwave sensor and emergency options. The new GAMMA fittings provide an exciting new option for lighting in suspended ceilings. These fittings are very easy to install onto a T grid system and offer superb light output and flexibility.

Our Coast range has seen a lot of development, with new lines being added such as the ISLAY grade 316 up/down lights and the IONA polycarbonate wall lights, with an attractive curved design. The Coast brand has become well known for offering long lasting, durable products for our seaside areas.

Since our launch the very popular CULINA range of LED kitchen lighting has been instrumental in our companies growth. At the heart of the range is the 240V LED cabinet lights, which this year see a development of now having CCT & dimmable options.

The designs and features of our domestic outdoor fittings in the ZINC range were extremely well received in our previous catalogue. The popularity of this group of products has lead to further development, including new integrated LED wall & ground lights, offering modern design, excellent light output and energy efficiency.

Our goal here at Forum is to offer our distributors a wide range of high quality, competitively priced and expertly designed products along with a professional & friendly service. Our experienced internal account managers are always there to offer assistance, whilst our team of area sales managers and industry leading sales agents are always available for face to face meetings. Our willingness to work closely with our distributors and build strong, trusting relationships has been at the core of Forum's development. This is something that we very much look forward to continuing over the coming 12 months.

**The Forum Lighting Team**



## 1

### ZINC OUTDOOR & SENSORS

8-41	Wall
42-64	Lantern
65-67	Ground Lights
68-69	Post Lights
70-71	Door Number
72-79	Security & Floodlights
80-83	Work Lights
84-91	Outdoor Heating
92-107	Sensors

## 2

### COAST OUTDOOR

110-111	Post Lights
112-118	Lanterns
119-131	Bulkheads
132-142	Wall
143-149	Guide Lights
150-151	Ground
152-153	Security & Floodlights

## 3

### ELECTRALITE COMMERCIAL

156-165	LED Strip
166-171	LED Strip Accessories
172	Under Cabinet
173-177	LED Battens
178-179	T-Grid Lighting
180-182	Bulkheads
183-185	Recessed

# CONTENTS

## 4

### SPA BATHROOM

188-213	Collections
214-225	LED
226-232	Spotlights
233-243	Ceiling
244-248	Recessed
249-255	Wall
256-267	Mirrors
268-271	Bidet Seat

## 5

### SPA PRO PREMIUM

274-285	Collections
---------	-------------

## 6

### CULINA KITCHEN

288-295	Under Cabinet
296-298	Link Lights
299-305	Track Lighting
306-308	LED Battens
309-311	Plinth

## 7

### INLIGHT INDOOR & LED LAMPS

314-323	Spotlights
324-325	Picture Light
326-327	Task Lighting
328-333	Cable Sets
334-337	Shades
338-347	LED Lamps

## 8

### STANLEY SITE LIGHTING

350-367	Portable
368-371	Festoon

## 9

### INFO

372-373	Marketing
374	Lighting Terms
375	Colour Temp Guide
376	IP Rating
377	Bathroom Zoning
379-384	Index
385-386	Notes



# OUTDOOR

Domestic external lighting in both modern and traditional designs. Including ZINC Radiant Heaters, suitable for domestic or commercial applications are extremely efficient and effective. We also offer a range of LED compatible PIR, photocell and microwave sensors.

<b>WALL</b>	<b>8-41</b>
<b>LANTERN</b>	<b>42-64</b>
<b>GROUND LIGHTS</b>	<b>65-67</b>
<b>POST LIGHTS</b>	<b>68-69</b>
<b>DOOR NUMBER</b>	<b>70-71</b>
<b>SECURITY &amp; FLOODLIGHTS</b>	<b>72-79</b>
<b>WORK LIGHTS</b>	<b>80-83</b>
<b>OUTDOOR HEATING</b>	<b>84-91</b>
<b>SENSORS</b>	<b>92-107</b>








### Key Features

- 220-240V
- Constructed from [304] stainless steel and clear glass
- Comes in 6 different finishes
- PIR & Photocell versions available



Class 1 0.57kg



ZN-20941-SST



ZN-20941-POLSST



ZN-20941-BLK



ZN-20941-COP



ZN-20941-ANTH



ZN-20941-WHT

## LETO

### Up/Down Wall Light

**IP44**

Splashproof

Code	Finish	Description	Lamp	Dimensions
ZN-20941-SST	Stainless Steel	Leto Up/Down Wall Light	2 x 35W Max GU10	H:160mm W:60mm Proj:110mm
ZN-20941-POLSST	Polished Stainless			
ZN-20941-BLK	Black			
ZN-20941-WHT	White			
ZN-20941-ANTH	Anthracite			
ZN-20941-COP	Copper			



ZN-29179-BLK




ZN-29179-ANTH



ZN-29179-COP

### Key Features


- 220-240V
- Constructed from [304] stainless steel and clear glass
- Adjustable lux, sensitivity and timer
- Up to 8m detection distance
- Comes in 4 different finishes



Class 1 0.8kg

## LETO


Up/Down Wall Light with PIR



Splashproof



PIR Sensor



Detection Distance


Code	Finish	Description	Lamp	Dimensions
ZN-29179-SST	Stainless Steel	Leto Up/Down Wall Light with PIR	2 x 35W Max GU10	H:215mm W:68mm Proj:107mm
ZN-29179-BLK	Black			
ZN-29179-ANTH	Anthracite			
ZN-29179-COP	Copper			



ZN-34022-BLK

### Key Features

- 220-240V
- Constructed from [304] stainless steel and clear glass
- Photocell sensor




Class 1 0.67kg



ZN-34022-BLK

## LETO

Up/Down Wall Light with Photocell



Splashproof



Photocell Sensor


Code	Finish	Description	Lamp	Dimensions
ZN-34022-SST	Stainless Steel	Leto Up/Down Wall Light with Photocell	2 x 35W Max GU10	H:215mm W:68mm Proj:107mm
ZN-34022-BLK	Black			





### Key Features

- 220-240V
- Constructed from [304] stainless steel and clear glass
- Comes in 4 different finishes



Class 1 0.46kg



ZN-26536-BLK



ZN-26536-WHT



ZN-26536-COP

## LETO

### Adjustable Spotlight

**IP44**

Splashproof


Code	Finish	Description	Lamp	Dimensions
ZN-26536-SST	Stainless Steel	Leto Adjustable Spotlight	1 x 35W Max GU10	H:144mm W:60mm Proj:89mm
ZN-26536-BLK	Black			
ZN-26536-WHT	White			
ZN-26536-COP	Copper			





## Key Features

- 220-240V
- Constructed from [304] stainless steel and clear glass
- Screw in spike or deck mount included



## LETO

### Dual Mount Spotlight

**IP44**

Splashproof

Code	Finish	Description	Lamp	Dimensions
ZN-29180-SST	Stainless Steel	Leto Dual Mount Spotlight	1 x 35W Max GU10	H:215mm W:60mm Proj:107mm
ZN-29180-BLK	Black			



ZN-34018-SST

### Key Features

- 220-240V
- Constructed from [304] stainless steel and clear glass



Class 1



0.81kg



ZN-34018-BLK

## LETO

### Adjustable Twin Spotlight

**IP44**

Splashproof

Code	Finish	Description	Lamp	Dimensions
ZN-34018-SST	Stainless Steel	Leto Adjustable Twin Spotlight	2 x 35W Max GU10	H:215mm W:68mm Proj:107mm
ZN-34018-BLK	Black			



**NEW**



**Key Features**

- 220-240V
- Die-cast aluminium construction



Class 1

# NEVIS


Downlight

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
ZN-35740-BLK	Black	Nevis Downlight	1 x 9W LED Max GU10	H:120mm W:110mm Proj:155mm

**NEW**

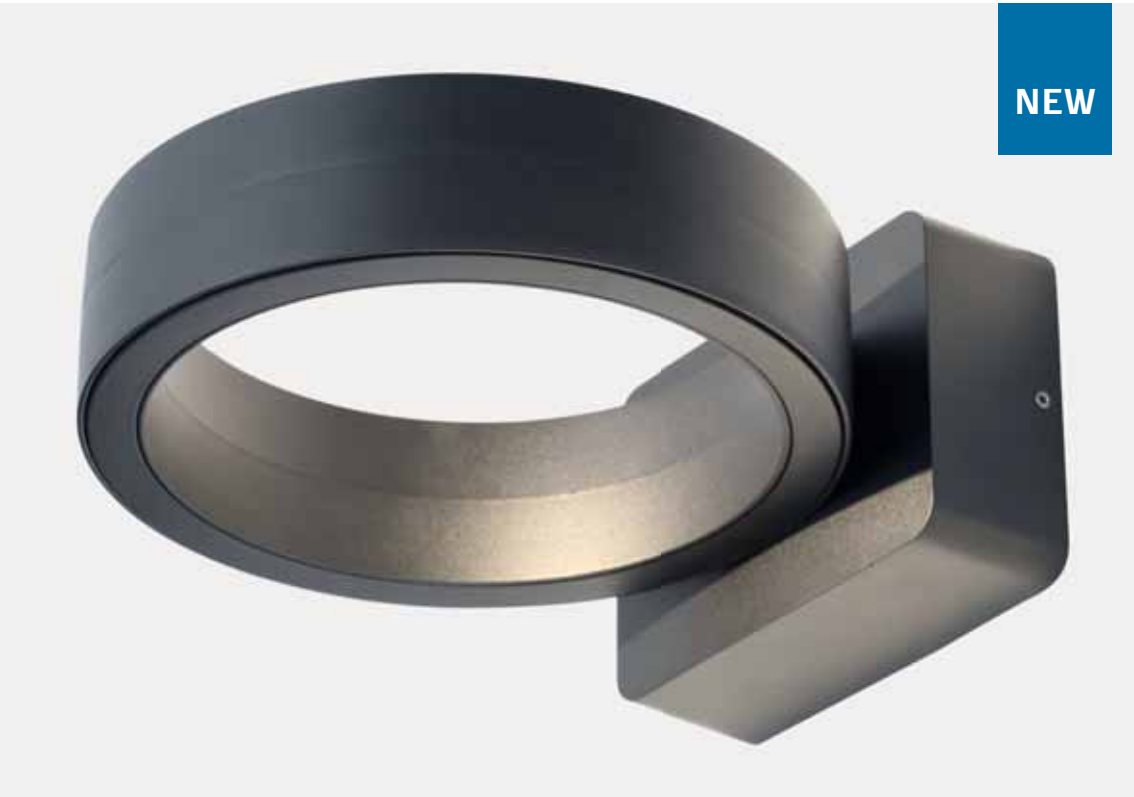

**Key Features**

- 220-240V
- Die-cast aluminium
- COB LED
- 20,000 hours lifespan



Class 1

# KITT

LED Halo Wall Light

<b>4000K</b>	<b>16W</b> <i>LED</i>	<b>900</b> Lumens	<b>IP54</b>	<b>3Y</b>
--------------	--------------------------	----------------------	-------------	-----------

Cool White	COB LED	77.5lm/W	Ideal for use outdoors	3 Year Guarantee
------------	---------	----------	------------------------	------------------

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35739-BLK	Black	Kitt LED Halo Wall Light	16W	4000k	900	56.25	H:53mm Dia:150mm

**NEW**



### Key Features

- 220-240V
- Die-cast aluminium & glass
- COB LED
- 20,000 hours lifespan



Class 1



## GORDA LED Spotlight

**4000K**

Cool White

**12W  
LED**

COB LED

**700  
Lumens**

58lm/W

**IP54**

Ideal for use outdoors

**3Y**

3 Year Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35741-BLK	Black	Gorda LED Spotlight	12W	4000k	700	58	H:235mm W:95mm Proj:160mm

NEW



### Key Features

- 220-240V
- Die-cast aluminium
- Wall mounted
- 20,000 hours lifespan



Class 1

## MAUI

LED Up/Down Wall Light

4000K

Cool White

8W  
LED

Integral LED

620  
Lumens

77.5lm/W

IP54

Ideal for use  
outdoors

3Y

3 Year  
Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29995-BLK	Black	Maui LED Up/Down Light	8W	4000k	620	77.5	H:110mm W:110mm Proj:98mm

NEW



Key Features

- 220-240V
- Die-cast aluminium
- Wall mounted
- 20,000 hours lifespan



Class 1

# HANA

LED Up/Down Wall Light

<b>4000K</b>	<b>8W</b> <i>LED</i>	<b>620</b> Lumens	<b>IP54</b>	<b>3Y</b>
--------------	-------------------------	----------------------	-------------	-----------

Cool White	Integral LED	77.5lm/W	Ideal for use outdoors	3 Year Guarantee
------------	--------------	----------	------------------------	------------------

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29996-BLK	Black	Hana LED Up/Down Light	8W	4000k	620	77.5	H:110mm W:110mm Proj:98mm

NEW



### Key Features

- 220-240V
- Die-cast aluminium
- Wall mounted
- 20,000 hours lifespan



Class 1

## MANU

LED Up/Down LED Wall Light

4000K

Cool White

8W  
LED

Integral LED

620  
Lumens

77.5lm/W

IP54

Ideal for use  
outdoors

3Y

3 Year  
Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29993-BLK	Black	Manu Up/Down LED Wall Light	8W	4000k	620	77.5	H:123mm W:130mm Proj:70mm

2  
SIZES  
AVAILABLE



### Key Features

- 220-240V
- Die-cast aluminium
- Wall mounted
- 20,000 hours lifespan



Class 1



## STROUD

LED Up/Down Wall Light

**4000K**

Cool White

**IP65**

Ideal for use outdoors

**LED**

Integral LED

**3Y**

3 Year Guarantee

Code	Description	Lamp	Lumen	Dimensions
ZN-31768-BLK	Stroud Small LED Up/Down Wall Light	6W LED	275	H:90mm W:220mm Proj:77mm
ZN-31767-BLK	Stroud Large LED Up/Down Wall Light	12W LED	400	H:120mm W:300mm Proj:90mm



## Key Features

- 220-240
- Contemporary styling
- Black textured finish
- Brushed steel finish



Class 1

# ANTAR

Up/Down Wall Light

**IP44**

Splashproof

Code	Description	Lamp	Weight	Dimensions
ZN-20930-BLK	Antar Up/Down Wall Light	2 x 35W Max GU10	0.44kg	Proj:92mm W:68mm H:150mm
ZN-20930-SST	Antar Up/Down Wall Light	2 x 35W Max GU10	0.44kg	Proj:92mm W:68mm H:150mm





### Key Features

- 220-240
- Contemporary styling
- Textured black finish
- Brushed steel finish



Class 1

## ANTAR

### Wall Light

**IP44**

Splashproof

Code	Description	Lamp	Weight	Dimensions
ZN-29181-BLK	Antar Wall Light	1 x 35W Max GU10	0.3kg	Proj:81mm W:68mm H:92mm
ZN-29181-SST	Antar Wall Light	1 x 35W Max GU10	0.3kg	Proj:81mm W:68mm H:92mm



### Key Features

- 220-240
- Contemporary styling
- Anthracite textured finish
- Brushed steel finish



Class 1

## FLEET

Square Up/Down Light

**IP44**

Splashproof

Code	Description	Lamp	Weight	Dimensions
ZN-31759-ANTH	Fleet Square Up/Down Light	2 x 35W Max GU10	0.56kg	Proj:92mm W:92mm H:150mm
ZN-31759-POLALU	Fleet Square Up/Down Light	2 x 35W Max GU10	0.56kg	Proj:92mm W:92mm H:150mm



### Key Features

- 220-240
- Contemporary styling
- Anthracite textured finish
- Brushed steel finish



Class 1

## FLEET


### Square Downlight

**IP44**

Splashproof

Code	Description	Lamp	Weight	Dimensions
ZN-31758-ANTH	Fleet Square Downlight	1 x 35W Max GU10	0.36kg	Proj:92mm W:68mm H:81mm
ZN-31758-POLALU	Fleet Square Downlight	1 x 35W Max GU10	0.36kg	Proj:92mm W:68mm H:81mm

NEW

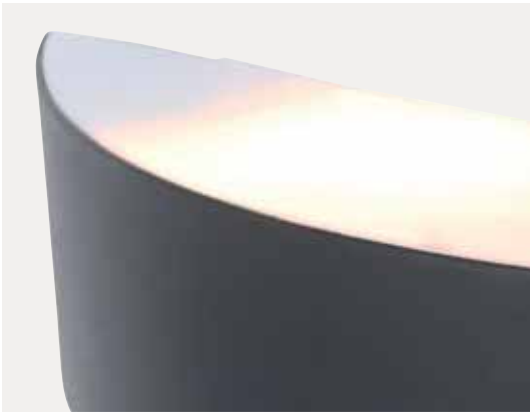

Key Features

- 220-240V
- Die-cast aluminium construction



Class 1

# MOKU

Up/Down Wall Light

**IP44**


Splashproof from any angle

Code	Finish	Description	Lamp	Dimensions
ZN-29992-BLK	Black	Moku Up/Down Wall Light	1 x 9W LED Max E27 GLS	H:94mm W:360mm Proj:78mm



## Key Features

- 220-240V
- Supplied with blanking plate to be used as downlight
- Contemporary grey finish
- Die-cast aluminium



Class 1 0.92kg

# SELENE

Curved Up/Down Wall Light

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
ZN-20973-GRY	Selene Curved Up/Down Wall Light	1 x 42W Max E27 GLS	Proj:94mm W:360mm H:78mm





## Key Features


- 220-240V
- Die-cast aluminium
- Anthracite finish
- Available with or without photocell sensor



Class 1 0.93kg

## LENS

### Up/Down Wall Light



Splashproof



Available with  
Photocell  
Sensor

Code	Sensor	Description	Lamp	Dimensions
ZN-29189-ATR	-	Lens Up/Down Wall Light	2 x 35W Max GU10	H:187mm W:102mm Proj:140mm
ZN-34042-ANTH	Photocell			




## Key Features

- 220-240V
- Die-cast aluminium
- Anthracite finish
- Available with or without photocell sensor



Class 1 0.75kg

## LENS Downlight



Splashproof



Available with  
Photocell  
Sensor

Code	Sensor	Description	Lamp	Dimensions
ZN-29190-ATR	-	Lens Downlight	1 x 35W Max GU10	H:155mm W:102mm Proj:140mm
ZN-34043-ANTH	Photocell			





ZN-35593-BLK



ZN-35686-BLK

### Key Features

- 220-240V
- Die-cast aluminium
- Black ridged finish
- Available with or without photocell sensor



Class 1 0.8kg

## HELIX Downlight



Splashproof from any angle



Available with Photocell Sensor

Code	Sensor	Description	Lamp	Dimensions
ZN-35593-BLK	-	Helix Down Light	1 x 35W Max GU10	H:162mm W:92mm Proj:104mm
ZN-35686-BLK	Photocell			





ZN-35594-BLK



ZN-35685-BLK

### Key Features

- 220-240V
- Die-cast aluminium
- Black ridged finish
- Available with or without photocell sensor



Class 1 0.8kg

## HELIX

### Up/Down Wall Light



Splashproof from any angle



Available with Photocell Sensor


Code	Sensor	Description	Lamp	Dimensions
ZN-35594-BLK	-	Helix Up/Down Wall Light	2 x 35W Max GU10	H:223mm W:92mm Proj:104mm
ZN-35685-BLK	Photocell			

HIGH  
LUMEN  
OUTPUT



### Key Features

- 220-240V
- Die-cast aluminium
- 30,000 hours lifespan



Class 1 1.35kg

## MIZAR

Up/Down LED Wall Light

4000K

Cool White

20W  
LED

Integral LED

1200  
Lumens

60lm/W

IP54

Splashproof  
from any angle

3Y

3 Year  
Guarantee

Code

Description

Lamp

Dimensions

ZN-34019-ANTH

Mizar Up/Down LED Wall Light

2 x 10W LED


H:255mm W:90mm Proj:130mm

HIGH  
LUMEN  
OUTPUT



## Key Features

- 220-240V
- Die-cast aluminium
- 30,000 hours lifespan



Class 1 0.83kg

## MIZAR LED Downlight

4000K

Cool White

10W  
LED

Integral LED

740  
Lumens

74lm/W

IP54

Splashproof  
from any angle

3Y

3 Year  
Guarantee

Code

Description

Lamp

Dimensions

ZN-34020-ANTH

Mizar LED Downlight

10W LED


H:150mm W:90mm Proj:130mm





### Key Features

- 220-240V
- Die-cast aluminium
- Black or stainless finish



Class 1 0.5kg

## MELO

### Up/Down Wall Light

**4000K**

Cool White

**IP44**

Splashproof  
from any angle

**10W  
LED**

2 x 5W  
Integral LED

**850  
Lumens**

85lm/W

**3Y**

3 Year  
Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-33460-BLK	Black	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm
ZN-33460-SST	Stainless Steel	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm



### Key Features

- 220-240V
- Die-cast aluminium
- Black or stainless finish
- Photocell sensor



Class 1 0.5kg

## MELO

Up/Down Wall Light

4000K

Cool White

IP44

Splashproof  
from any angle

10W  
LED

2 x 5W  
Integral LED

850  
Lumens

85lm/W



Photocell  
Sensor

3Y

3 Year  
Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34555-BLK	Black	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm
ZN-34555-SST	Stainless Steel					



**NEW**



### Key Features

- 220-240V
- Die-cast aluminium construction



Class 1



## SKYE

Double Cone Up/Down Wall Light

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
ZN-29347-BLK	Black	Skye Double Cone Up/Down Wall Light	1 x 7W LED Max GU10 GLS	H:200mm W:77mm Proj:80mm
ZN-29347-SST	Stainless Steel			





ZN-34002-SST

### Key Features

- 220-240V
- Aluminium body
- Durable PC shade



Class 1 0.83kg



ZN-34003-BLK

## LEONIS

### Wall Lantern

**IP44**


Splashproof

Code	Description	Finish	Lamp	Dimensions
ZN-34002-SST	Leonis Wall Lantern	Stainless Steel	1 x 42W Max E27	H:210mm W:130mm Proj:200mm
ZN-34003-BLK	Leonis Wall Lantern	Black	1 x 42W Max E27	H:210mm W:130mm Proj:200mm



## Key Features

- 220-240V
- Contemporary Styling
- Water glass feature



Class 1 1.75kg

## KEB Wall Lantern

**IP44**

Splashproof  
from any angle


Code	Description	Lamp	Dimensions
ZN-32069-BLK	Keb Wall Lantern	1 x 42W Max E27 GLS	Proj:142mm W:181mm H:257mm

**NEW**  
COLOUR  
OPTIONS



### Key Features

- 220-240V
- Contemporary Styling
- Available in 3 finishes



Class 1 1.7kg

## MINERVA

### Box Lantern

**IP44**

Splashproof  
from any angle


Code	Finish	Description	Lamp	Dimensions
ZN-20944-BLK	Black	Minerva Box Lantern	1 x 42W Max E27 GLS	W:160mm H:330mm Proj:100mm
ZN-20944-SIL	Silver <b>NEW</b>			
ZN_20944-ANTH	Anthracite <b>NEW</b>			





### Key Features

- 220-240V
- PIR Sensor
- 3-2000 lux (adjustable)



Class 1 1.75kg

## MINERVA

Wall Lantern

IP44



Splashproof  
from any angle

PIR  
Sensor


Code	Description	Lamp	Dimensions
ZN-32070-BLK	Minerva Wall Lantern	1 x 42W Max E27 GLS	Proj:110mm W:160mm H:330mm



ZN-20945-BLK

### Key Features

- 220-240V
- Contemporary Styling
- Black finish
- Brushed Steel finish



Class 1 1.75kg



ZN-20945-SST

## ARTEMIS

### Box Lantern

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
ZN-20945-BLK	Artemis Box Lantern	1 x 42W Max E27 GLS	Proj:100mm W:220mm H:240mm
ZN-20945-SST	Artemis Box Lantern	1 x 42W Max E27 GLS	Proj:100mm W:220mm H:240mm





### Key Features

- 220-240V
- Metal & Glass
- Stainless steel finish



Class 1

## VULCAN

### Tiered Lantern

**IP44**


Splashproof

Code	Description	Finish	Lamp	Dimensions
ZN-20943-BLK	Vulcan Tiered Lantern	Black	1 x 60W Max E27	H:230mm W:250mm Proj:270mm



### Key Features

- 220-240V
- Vintage styling
- Black satin finish



Class 1 1.1kg

## WOKING

### Wall Lantern

**IP44**


Splashproof  
from any angle

Code	Description	Lamp	Dimensions
ZN-31807-TBLK	Woking Wall Lantern	1 x 42W Max E27 GLS	Proj:180mm W:110mm H:380mm



### Key Features

- 220-240V
- Available in 2 finishes
- Contemporary styling



Class 1 0.91kg

## KEW Wall Lantern

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
ZN-31809-SST	Stainless Steel	Kew Wall Lantern	1 x 42W Max E27 GLS	Proj:180mm W:110mm H:380mm
ZN-31808-POLSST	Polished Steel			



### Key Features

- 220-240V
- Vintage styling
- Stainless steel finish



Class 1

## KARI

### Porch Lantern

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
ZN-24507-SST	Kari Porch Lantern	1 x 42W Max E27 GLS	H:310mm Dia:145mm



### Key Features

- 220-240V
- Metal & Glass
- Stainless steel finish



Class 1

## LUNA

Station Wall Lantern

**IP44**

Splashproof


Code	Description	Finish	Lamp	Dimensions
ZN-20942-SST	Luna Station Lantern	Stainless Steel	1 x 60W Max E27	H:380mm W:290mm Proj:350mm





### Key Features

- 220-240V
- Vintage styling
- Anthracite finish



Class 1 0.75kg

## LEEK

### Mini Fisherman's Lantern

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
ZN-31757-ANTH	Leek Mini Fisherman's Lantern	1 x 42W Max E27 GLS	Proj:230mm W:180mm H:255mm







### Key Features

- 220-240V
- Traditional Styling
- Die-cast aluminium construction



Class 1

## ERIS

### Fishermans Lantern

**IP44**

Splashproof  
from any angle


Code	Description	Lamp	Dimensions
ZN-20957-BLK	Eris Fishermans Lantern	1 x 42W Max E27 GLS	Proj:260mm W:180mm H:370mm





### Key Features

- 220-240V
- Vintage styling
- Black satin finish



Class 1 0.98kg

## CERES

### Wall Lantern

**IP23**


Protected against spray at any angle up to 60°

Code	Description	Lamp	Dimensions
ZN-20955-BLK	Ceres Wall Lantern	1 x 42W Max E27 GLS	Proj:145mm W:105mm H:290mm



### Key Features

- 220-240V
- Die-cast aluminium
- Available with or without photocell sensor
- 30,000 hours lifespan



Class 1 0.82kg

## TRITON

### LED Half Lantern

**4000K**

Cool White

**IP44**

Splashproof  
from any angle

**10W  
LED**

10W  
Integral LED

**320  
Lumens**

32lm/W



Available with  
Photocell  
Sensor

**3Y**

3 Year  
Guarantee

Code	Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-33992-BLK	-	Triton Half Lantern	10W LED	4000k	320	H:360mm W:172mm Proj:97mm
ZN-33993-BLK	Photocell					



### Key Features


- 220-240V
- Die-cast aluminium
- Available with or without photocell sensor
- 30,000 hours lifespan



Class 1 1.08kg

## PERSEI

### Half Lantern



Splashproof from any angle



Available with Photocell Sensor

Code	Sensor	Description	Lamp	Dimensions
ZN-33994-BLK	-	Persei Half Lantern	1 x 42W Max E27 GLS	H:380mm W:210mm Proj:100mm
ZN-33995-BLK	Photocell			



## Key Features

- 220-240V
- Vintage styling
- Black satin finish



Class 1 0.5kg

# PERDITA

## Half Lantern

**IP44**


Splashproof  
from any angle

Code	Description	Lamp	Dimensions
ZN-25464-BLK	Perdita Half Lantern	1 x 42W E27 GLS	Proj:129mm W:179mm H:196mm



### Key Features

- 220-240
- Vintage styling
- Black satin finish



Class 1 0.55kg

## PERDITA

Curved Wall Lantern

**IP44**


Splashproof  
from any angle

Code	Description	Lamp	Dimensions
ZN-25463-BLK	Perdita Curved Wall Lantern	1 x 42W E27 GLS	Proj:193mm W:170mm H:230mm



### Key Features

- 220-240V
- Die-cast aluminium
- Available in 2 finishes
- Available with or without PIR sensor



Class 1 0.65kg

# SIGMA

## Panel Slatted Wall Lantern

**IP44**

Splashproof from any angle



Available with PIR Sensor


Code	Finish	Sensor	Description	Lamp	Dimensions
ZN-25340-SST	Stainless Steel	-	Sigma Panel Slatted Wall Lantern	1 x 42W E27 GLS	H:275mm W:200mm Proj:90mm
ZN-28708-SST	Stainless Steel	PIR			
ZN-28708-BLK	Black	PIR			





## Key Features

- 220-240V
- Die-cast aluminium
- Ergonomic design



Class 1 0.35kg

# PAN

## Drive Over Ground Light

**IP67**

Protected against temporary immersion

**98mm**

Cut-out size

Code	Finish	Description	Lamp	Dimensions
ZN-20965-SST	Stainless Steel	Pan Drive Over Ground Light	1 x 35W Max GU10	Dia:100mm H:115mm
ZN-29184-BLK	Black			Dia:100mm H:135mm

NEW



# SCOUT

Surface Mount Ground Light

<b>4000K</b>	<b>3W</b> <i>LED</i>	<b>100</b> Lumens	<b>IP67</b>	<b>3Y</b>
--------------	-------------------------	----------------------	-------------	-----------

Cool White	Integral LED	33lm/W	Protected against temporary immersion	3 Year Guarantee
------------	--------------	--------	---------------------------------------	------------------

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35738-BLK	Black	Scout Surface Mount Ground Light - 150mm	3W	4000k	100	33	Dia:150mm Proj:53mm

NEW



# SCOUT

Surface Mount Ground Light

<b>4000K</b>	<b>4W</b> <i>LED</i>	<b>160</b> Lumens	<b>IP67</b>	<b>3Y</b>
--------------	-------------------------	----------------------	-------------	-----------

Cool White	Integral LED	40lm/W	Protected against temporary immersion	3 Year Guarantee
------------	--------------	--------	---------------------------------------	------------------


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29997-BLK	Black	Scout Surface Mount Ground Light - 210mm	4W	4000k	100	40	Dia:210 Proj:55mm





### Key Features

- 220-240V
- Die-cast aluminium
- Floor mounted
- 3 variable heights - 300 / 550 / 800mm



Class 2 1.06kg

## POLLUX LED Post Light


<b>3000K</b>	<b>IP44</b>	<b>4W LED</b>	<b>200 Lumens</b>	<b>3Y</b>
Warm White	Splashproof from any angle	2 x 5W Integral LED	50lm/W	3 Year Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-33394-BLK	Black	Pollux LED Post Light	4W LED	3000K	200	H:800mm Dia:120mm
ZN-33394-SST	Stainless Steel					



### Key Features

- 220-240V
- Includes full number/letter set
- 30,000 hours LED lifetime
- Dusk/Dawn photocell sensor



Class 2 0.8kg

## IOTA

### LED Door Number

4000K

Cool White

6W  
LED

Integral LED

390  
Lumens

65lm/W

IP54

Splashproof  
from any angle



Photocell  
Sensor

3Y

3 Year  
Guarantee

Code	Description	Finish	Lamp	Lumen	Dimensions
ZN-34044-BLK	Iota LED Door Number	Black	6W LED	390	H:200mm W:195mm Proj:36mm

**NEW**



### Key Features

- 220-240V
- Polycarbonate construction
- Automatically turns on/off at night with adjustable lux sensor <3-50 LUX
- 20,000 hours lifespan



Class 1

## MESA LED Door Number

<b>3000K</b>	<b>16W LED</b>	<b>1300 Lumens</b>		<b>IP65</b>	<b>IK10</b>	<b>3Y</b>
Warm White	Integral LED	81.25lm/W	Adjustable LUX sensor	Ideal for use outdoors	Impact protection	3 Year Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35689	Black/Opal	Mesa LED Door Number	16W	3000k	1300	81.25	H:195mm W:300mm Proj:70mm

**NEW**



### Key Features

- 220-240V
- Polycarbonate construction
- Adjustable lux, timer & sensitivity
- Installation height 1.8–2.5m
- 20,000 hours lifespan



Class 1

## LYNN

### PIR Security Spotlight

**4000K**

Cool White

**10W  
LED**

Integral LED

**750  
Lumens**

75lm/W

**IP65**

Ideal for use outdoors



PIR Sensor

**12M  
180°**

Detection Distance 5–12m

**3Y**

3 Year Guarantee

Code

Finish

Description

Power (w)

Colour (k)

Total Flux (lm)

Efficiency (lm/W)

Dimensions

ZN-35687

Black

Lynn PIR Security Spotlight

10W

4000k

750

75

H:127mm W:143mm  
Proj:179mm



**NEW**



### Key Features

- 220-240V
- Polycarbonate construction
- Adjustable lux, timer & sensitivity
- Installation height 1.8–2.5m
- 20,000 hours lifespan



Class 1

## LYNN PIR Security Twin Spotlight

<b>4000K</b>	<b>20W LED</b>	<b>1500 Lumens</b>	<b>IP65</b>		<b>12M 180°</b>	<b>3Y</b>
Cool White	Integral LED	75lm/W	Ideal for use outdoors	PIR Sensor	Detection Distance 5-12m	3 Year Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
------	--------	-------------	-----------	------------	-----------------	-------------------	------------

ZN-35688	Black	Lynn PIR Security Twin Spotlight	20W	4000k	1500	75	H:134mm W:257mm Proj:166mm
----------	-------	----------------------------------	-----	-------	------	----	----------------------------





### Key Features

- 220-240V
- Polycarbonate body
- PIR sensor with adjustable LUX, sensitivity and timer
- 20,000 hours lifespan



Class 1

## SIROCCO

### LED Twinspot Floodlight

**6000K**

Daylight White

**6W**  
*LED*

Integral LED

**480**  
Lumens

80lm/W

**IP44**

Splashproof from any angle



PIR Sensor

**12M**  
180°

Detection Distance 5-12m

**3Y**

3 Year Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-23454-BLK	Black	Sirocco LED Twinspot Floodlight	6W	6000k	480	80	H:160mm W:147mm Proj:134mm
ZN-23454-WHT	White						

ZN-34354-BLK



### Key Features

- 220-240V
- Die-cast aluminium
- Pre wired with 500mm cable
- 20,000 hours lifespan
- 180° beam angle
- Angled bracket for easy installation



Class 1



ZN-34355-BLK



ZN-34356-BLK

## OTLEY

### LED Slimline Floodlight

**6500K**

Daylight White

**LED**

Integral LED

Up to **2400 Lumens**

Up to 2400lm

**IP65**

Ideal for use outdoors

**0.5m**

0.5 Meter Cable

**3Y**

3 Year Guarantee

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
ZN-34354-BLK	Otley LED Slimline Floodlight	10W LED	800	0.18kg	H:120mm W:103mm Proj:65mm
ZN-34355-BLK		20W LED	1600	0.41kg	H:162mm W:159mm Proj:85mm
ZN-34356-BLK		30W LED	2400	0.41kg	H:162mm W:159mm Proj:85mm

ZN-34358-BLK



### Key Features

- 220-240V
- Die-cast aluminium
- Pre wired with 500mm cable
- 20,000 hours lifespan
- 180° beam angle
- Angled bracket for easy installation



Class 1

ZN-34357-BLK



## OTLEY

### LED Slimline Floodlight

6500K

Daylight White

LED

Integral LED

Up to  
8000  
Lumens

Up to  
8000lm

IP65

Ideal for use outdoors

0.5m

0.5 Meter Cable

3Y

3 Year Guarantee

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
ZN-34357-BLK	Otley LED Slimline Floodlight	50W LED	4000	0.74kg	H:180mm W:205mm Proj:115mm
ZN-34358-BLK		100W LED	8000	1.37kg	H:230mm W:270mm Proj:142mm



ZN-34362-BLK



ZN-34359-BLK



ZN-34360-BLK



ZN-34361-BLK



### Key Features

- 220-240V
- Die-cast aluminium
- Pre wired with 500mm cable
- 20,000 hours lifespan
- 180° beam angle
- Angled bracket for easy installation
- PIR sensor with adjustable LUX, sensitivity and timer



Class 1

## RYE

### LED Slimline Floodlight

6500K

Daylight White

LED

Integral LED

Up to  
4000  
Lumens

Up to  
4000lm

IP65

Ideal for use outdoors

0.5m

0.5 Meter Cable



PIR Sensor

12M  
180°

Detection Distance  
5-12m

3Y

3 Year Guarantee

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
ZN-34359-BLK	Rye LED Slimline Floodlight	10W LED	800	0.23kg	H:140mm W:103mm Proj:148mm
ZN-34360-BLK		20W LED	1600	0.46kg	H:180mm W:158mm Proj:159mm
ZN-34361-BLK		30W LED	2400	0.46kg	H:180mm W:158mm Proj:159mm
ZN-34362-BLK		50W LED	4000	0.82kg	H:200mm W:205mm Proj:150mm



### Key Features

- Tough aluminium construction
- Rotates 360° on base
- Non-slip carry handle
- 40,000 hours LED lifetime
- Fully charged in 4-5 hours
- Supplied with power adapter and in-car charger



Class 3

- Power adapter and in-car charger

## RECHARGEABLE

### Work Light

**6000K**

Daylight White

**LED**

Integral LED

Up to  
**2250 Lumens**

Up to 2250lm

**IP54**

Ideal for use outdoors



Re-chargeable

**3Y**

3 Year Guarantee

Description	Code	Power (w)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Charge Time (h)	Run Time (h)	Dimensions
Rechargeable Work Light	ZN-31385	10W	600	60	6000k	4-5 Hours	4 Hours (100%)	L:135mm W:120mm H:255mm
	ZN-31386	20W	1200	60			8 Hours (50%)	L:160mm W:160mm H:300mm
	ZN-35684 <b>NEW</b>	30W	2250 (high) 1125 (low)	75			L:225mm W:244mm H:392mm	



# HEAVY DUTY

## Tripod



### Key Features

- Die-cast construction
- Extendable up to 1.58m
- Easy to fit lamp heads
- For use with ZN-31385, ZN-31386 & ZN-35684
- 20W floodlights not included

Code

Description

Dimensions

ZN-31387

Heavy Duty Tripod


Dia:800mm W:500mm H:1580mm





### Key Features

- Durable rubber casing
- Heavy duty extendable tripod up to 1.6m
- 1.8m H07-RNF cable
- 20,000 hours lifetime



Class 1 3.4kg



## TWIN LED

### Work Light with Tripod

<b>6000K</b> Daylight White	<b>40W LED</b> 2 x 20W Integral LED	<b>3000 Lumens</b> 75lm/W	<b>IP65</b> Ideal for use outdoors	<b>1.8m</b> 1.8 Meter Cable	<b>2Y</b> 2 Year Guarantee
--------------------------------	--	------------------------------	---------------------------------------	--------------------------------	-------------------------------

Code	Description	Voltage	Lamp	Lumen	Dimensions
ZN-34870	Twin Work Light with Tripod	220-240V	2 x 20W LED	3000	Dia:1000mm H:1600mm





### Key Features

- Ideal for commercial applications
- Remote control operated
- 3000W max power
- Variable heat setting
- 1-9 Hour Timer
- Heat coverage 20m<sup>2</sup>



3.5kg



## 3000W Wall Mounted Heater

**IP65**

Ideal for use outdoors



x3 Heat Settings

Code	Description	Dimensions
ZR-32301	3000W Wall Mounted Heater	Proj:160mm W:1478mm H:155mm



### Key Features

- Pull switch
- 2100W max power
- 3 variable heat settings
- Floor stand available separately
- Heat coverage 12m<sup>2</sup>



KG

2kg

## 2100W

### Wall Mounted Patio Heater

IP24

Ideal for use indoors



x3 Heat Settings

Code	Description	Dimensions
ZR-32297	2100W Wall Mounted Patio Heater	Proj:225mm W:482mm H:264mm
ZR-32302	Patio Heater Floor Stand	Dia:405mm H:1525mm



### Key Features

- Pull ON/OFF switch
- 1800W max power
- Floor stand available separately
- Heat coverage 12m<sup>2</sup>



2.4kg



## 1800W

Wall Mounted Patio Heater

**IP44**

Splashproof

Code	Description	Dimensions
ZR-32298	1800W Wall Mounted Patio Heater	Proj:230mm W:650mm H:246mm
ZR-32302	Patio Heater Floor Stand	Dia:405mm H:1525mm



· Remote controlled

### Key Features

- Remote control operated
- 1800W max power
- 3 variable heat settings
- Floor stand available separately
- Heat coverage 12m<sup>2</sup>




3.5kg



## 1800W

### Wall Mounted Patio Heater



Splashproof



x3 Heat Settings



Integral LED

Code	Description	Dimensions
ZR-32299	1800W Wall Mounted Patio Heater	Proj:230mm W:890mm H:246mm
ZR-32302	Patio Heater Floor Stand	Dia:405mm H:1525mm





· Remote controlled

**Key Features**

- Remote control
- 1600W max power
- Tip over safety switch
- 3 variable heat settings
- Heat coverage 10m<sup>2</sup>



7.8kg



**1600W**  
Floor Standing Patio Heater



Splashproof



x3 Heat Settings

Code	Description	Dimensions
ZR-32300	1600W Floor Standing Patio Heater	Dia:283mm H:1117mm





### Key Features

- Ideal for indoor and outdoor use
- 3 variable heat settings
- 2000W max power
- Remote control operated
- 0-24 Hour timer
- Heat coverage 12m<sup>2</sup>



3.6kg

## 2000W Wall Mounted Patio Heater



Splashproof  
from any angle



x3 Heat  
Settings

Code	Description	Dimensions
ZR-32328	2000W Wall Mounted Patio Heater	W:900mm H:130mm Proj:89.5

NEW



### Key Features

- Can detect day or night with adjustable LUX
- 6m max detection distance
- 10 secs - 5min adjustable timer
- 360° detection range
- Polycarbonate construction

## RENO

### LED Recessed PIR Spotlight

3000K

Warm White

8W  
LED

Integral LED

500  
Lumens

62.5lm/W



PIR  
Sensor

6M  
360°

Detection  
Distance  
Max 6m

3Y

3 Year  
Guarantee

Code	Power (w)	Colour (k)	Total Flux (lm)	Distance	Range	LUX (adjustable)	Time Delay (adjustable)	Dimensions
ZN-35690-WHT	8W	3000k	500	Max 6m	360°	<3-2000 LUX	Min.10sec±3sec Max.5min±1min	Dia:105mm H:48mm

**NEW**

**MANUAL  
OVERRIDE**




**Key Features**

- LED compatible
- Manual override function
- 20m max detection distance
- 360° detection range
- Can be installed up to 6m high

# NAPA

Adjustable Wall PIR Sensor

<b>IP44</b>		<b>20M 360°</b>	<b>MANUAL OVERRIDE</b>	<b>3Y</b>
Splashproof from any angle	PIR Sensor	Detection Distance Max 20m	8 hours	3 Year Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-35691-BLK	2 – 6m	Max 20m	360°	3-2000 LUX (adjustable)	2000W Halogen 600W LED	H:56mm W:87mm Proj:173mm



ZN-25152-BLK



- Removeable corner mount

### Key Features

- LED compatible
- Can be fitted to an external or internal corner.
- Mount can be removed to fit against flush walls.
- 5 - 12m detection distance
- 10 secs - 7min timer
- 360° detection range
- Polycarbonate construction




0.18kg



ZN-25152-WHT

## ALIA

### Corner Motion Sensor

<b>IP44</b>		<b>12M</b> 360°	<b>3Y</b>
Splashproof from any angle	PIR Sensor	Detection Distance 5-12m	3 Year Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25152-BLK	1.6 - 2.5m	5 - 12m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	Proj:119mm W:60mm H:79mm
ZN-25152-WHT						

MANUAL  
OVERRIDE



ZN-33579-BLK

### Key Features

- LED compatible
- Manual override
- 5 - 12m detection distance
- 180° detection range
- Polycarbonate construction



0.15kg



ZN-33579-WHT

## DION

### Adjustable Motion Sensor

IP65

Ideal for use outdoors



PIR Sensor

12M  
180°

Detection Distance 5-12m

MANUAL  
OVERRIDE

8 hours

3Y

3 Year Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-33579-BLK	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	Proj:119.5mm W:80mm H:51.5mm
ZN-33579-WHT						



## Key Features

- LED compatible
- Easy to adjust LUX & time
- 12m max detection distance
- 2 sensors for extended range of detection
- Polycarbonate construction
- Creep sensor



0.15kg

# DION

## Stealth Motion Sensor

**IP65**

Ideal for use outdoors



PIR Sensor

**12M**  
180°

Detection Distance 5-12m

**3Y**

3 Year Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31787-WHT	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	Proj:119.5mm W:80mm H:51.5mm



MANUAL  
OVERRIDE



· Corner or flush mounted

ZN-33615-BLK

### Key Features

- Can be corner or flush mounted.
- LED compatible
- Manual override
- 12m max detection distance
- 180° detection range
- Polycarbonate construction



0.15kg



ZN-33615-WHT

## ALIA

### Adjustable Motion Sensor

IP44

Splashproof from any angle



PIR Sensor

12M  
180°

Detection Distance Max 12m

MANUAL  
OVERRIDE

8 hours

3Y

3 Year Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-33615-BLK	1.6 – 2.5m	Max 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:120mm W:78mm Proj:53mm
ZN-33615-WHT						




## Key Features

- LED compatible
- 3 integral sensors
- 12m max detection distance
- 360° detection range
- 10 secs – 7 mins adjustable timer
- Polycarbonate construction



0.1kg

## LOCA Motion Sensor

<b>IP44</b>		<b>12M</b> 360°	<b>3x</b> SENSOR	<b>3Y</b>
Splashproof from any angle	PIR Sensor	Detection Distance Max 12m	3 x Integral Sensors	3 Year Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25154-WHT	1.6 – 2.5m	12m max	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:55mm Dia:88mm



### Key Features

- LED compatible
- 3 integral sensors
- 20m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction




0.1kg

## LOCA


### Advanced Motion Sensor



PIR  
Sensor



Detection  
Distance  
Max 20m



3 x Integral  
Sensors



3 Year  
Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29177-WHT	1.6 – 2.5m	Max 20m	360°	3-2000 LUX (adjustable)	1200W Halogen 500W LED	L:102mm W:102mm H:58mm



### Key Features

- LED compatible
- 6m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction




0.1kg

## LOCA

### Motion Sensor



PIR  
Sensor



Detection  
Distance  
Max 6m



3 Year  
Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25153-WHT	2 – 2.4m	Max 6m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:46mm Dia:88mm



### Key Features

- LED compatible
- 12m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction




0.1kg

## LOCA

Extended Range Adjustable Motion Sensor



PIR  
Sensor



Detection  
Distance  
Max 12m




3 Year  
Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31786-WHT	1.6 – 2.5m	Max 12m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:51mm Dia:120mm



### Key Features

- Easily remove cover when recessed to adjust settings
- LED compatible
- 6m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction



0.05kg 40mm Cut-out

## LOCA

### Recessed Motion Sensor



PIR Sensor



Detection Distance Max 6m



3 Year Guarantee



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25155-WHT	1.6 – 2.5m	Max 6m	360°	3-2000 LUX (adjustable)	1200W Halogen 200W LED	H:16.8mm Dia:50mm



### Key Features

- 3 mounting positions
- LED compatible
- 8m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction




 0.05kg
  78mm Cut-out

## THEA

### Conduit Motion Sensor



PIR Sensor



Detection Distance Max 8m



3 Year Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31805-WHT	1.6 – 2.5m	Max 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:39mm Dia:80mm



### Key Features

- LED compatible
- 1, 2, 3, 4, 5, 6, 7, 8, 9 hours timer
- Polycarbonate construction



0.13kg

## ADRA

### Dusk Till Dawn Sensor

<b>IP44</b>		<b>3Y</b>
Splashproof from any angle	Photocell Sensor	3 Year Guarantee

Code	Timer	LUX	Max Rated Load	Dimensions
ZN-25156-BLK	1, 2, 3, 4, 5, 6, 7, 8, 9 Hours	3-500 LUX (adjustable)	1200W Halogen 250W LED	H:190mm W:70mm Proj:41mm





## Key Features

- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 2 – 15m detection distance when wall mounted
- 1.8m radius when ceiling mounted
- 180/360° detection range
- 10 secs – 12 mins adjustable timer



0.045kg

# THEA

Wall / Ceiling Microwave Sensor



Microwave  
Sensor

**15M**  
180/360°

Detection  
Distance  
2-15m

**5Y**

5 Year  
Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29185-WHT	1.6 – 3.5m	2 – 15m	180/360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	L:76mm W:37mm H:25mm



## Key Features

- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 5 – 15m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer



0.1kg



62mm  
Cut-out

# THEA

Recessed Microwave Sensor



Microwave  
Sensor

**15M**  
360°

Detection  
Distance  
5-15m

**5Y**

5 Year  
Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29187-WHT	1.6 – 3.5m	5 – 15m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:75.4mm Dia:76mm



## Key Features

- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 1 – 8m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer




0.11kg

# THEA

## Stealth Microwave Sensor



Microwave  
Sensor



Detection  
Distance  
1-8m



5 Year  
Guarantee

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29186-WHT	1.6 – 3.5m	1 – 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 500W LED	H:24mm Dia:115mm



# COASTAL

An extensive range of outdoor lighting constructed from polycarbonate with grade 316 stainless steel fixings. Domestic light fittings, designed with coastal areas in mind.

<b>POST LIGHTS</b>	<b>110-111</b>
<b>LANTERN</b>	<b>112-118</b>
<b>BULKHEADS</b>	<b>119-131</b>
<b>WALL</b>	<b>132-142</b>
<b>GUIDE LIGHTS</b>	<b>143-149</b>
<b>GROUND</b>	<b>150-151</b>
<b>SECURITY &amp; FLOODLIGHTS</b>	<b>152-153</b>





### Key Features

- 220-240V
- Corrosion resistant
- Three height options: 1260mm/860mm/460mm
- Short post lantern available separately
- Polycarbonate construction



Class 2



## BIANCA

### Post Lantern

IP44

Splashproof

5Y


5 Year Guarantee

Code	Description	Lamp	Dimensions
CZ-25148-BLK	Bianca Tall Post Lantern (3 Heights)	1 x 42W Max E27 GLS	W:222mm H:1260mm
CZ-25146-BLK	Bianca Post Lantern	1 x 42W Max E27 GLS	W:222mm H:460mm



### Key Features

- 220-240V
- Corrosion resistant
- 2 alternate installation options
- Polycarbonate construction



Class 2 0.73kg

## BIANCA

Up or Down Wall Lantern

IP44

Splashproof  
from any angle

5Y

5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-25145-BLK	Bianca Up or Down Wall Lantern	1 x 42W Max E27 GLS	Proj:222mm W:185mm H:402mm



MANUAL  
OVERRIDE



## Key Features

- 220-240V
- Corrosion resistant
- PIR sensor
- Polycarbonate construction



Class 1



0.84kg

# BIANCA

## Wall Lantern

IP44

Splashproof  
from any angle



PIR  
Sensor

6M

Detection  
Distance  
Max 6m

MANUAL  
OVERRIDE

Turn off PIR  
function

5Y

5 Year  
Guarantee

Code

Description

Lamp

Dimensions

CZ-25150-BLK

Bianca Wall Lantern

1 x 42W Max E27 GLS

Proj:261mm W:185mm H:402mm



### Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant
- Vintage styling



Class 2

## ATHENA

### Half Wall Lantern

**IP44**

Splashproof from any angle



Available with PIR Sensor

**6M**

Detection Distance Max 6m

**5Y**

5 Year Guarantee

Code	Sensor	Description	Lamp	Dimensions
CZ-31748-BLK	-	Athena Wall Lantern	1 x 42W Max E27 GLS	Proj:110mm W:180mm H:370mm
CZ-26743-BLK	PIR			

**NEW**



### Key Features


- 220-240V
- Corrosion resistant
- ABS & PC construction



Class 1

## JURA

Wall Lantern



Splashproof



5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-35742-BLK	Jura Wall Lantern	1 x 10W LED Max E27 GLS	Proj:190mm W:90mm H:225mm



### Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant
- Contemporary styling



Class 2

## YORK

### Globe Wall Lantern

IP44

Splashproof  
from any angle

5Y

5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-31811-BLK	York Globe Wall Lantern	1 x 42W Max E27 GLS	Proj:220mm W:200mm H:253mm



### Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant
- Contemporary styling



Class 2

## YORK

### Globe Post Lantern

IP44

Splashproof  
from any angle

5Y

5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-31812-BLK	York Globe Wall Lantern	1 x 42W Max E27 GLS	Dia:220mm H:405mm



### Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant
- Contemporary styling
- Vandal resistant materials



Class 2

## YORK

### Globe Porch Lantern

IP44

5Y

Splashproof  
from any angle

5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-33461-BLK	York Globe Porch Lantern	1 x 42W Max E27 GLS	Dia:200mm H:250mm



CZ-34027-BLK

### Key Features

- 220-240V
- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted  
Vertical or horizontal
- 25,000 Hours lifespan



Class 2



CZ-34026-BLK

## CAPELLA

### Oval Grid Bulkhead

4000K

Cool White

IP65

Ideal for use outdoors

LED

Integral LED

Up to  
750  
Lumens

Up to  
750lm

5Y

5 Year  
Guarantee

Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34026-BLK	Small	Capella Oval Grid Bulkhead	8W	4000k	400	50	H:115mm W:160mm Proj:57mm
CZ-34027-BLK	Large	Capella Oval Grid Bulkhead	15W	4000k	750	50	H:135mm W:210mm Proj:57mm







CZ-34025-BLK

### Key Features

- 220-240V
- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted  
Vertical or horizontal
- 25,000 Hours lifespan



Class 2



CZ-34024-BLK

## CAPELLA

### Round Grid Bulkhead

4000K

Cool White

IP65

Ideal for use outdoors

LED

Integral LED

Up to  
750  
Lumens

Up to  
750lm

5Y

5 Year  
Guarantee

Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34024-BLK	Small	Capella Round Grid Bulkhead	8W	4000k	400	50	Proj:57mm Dia:155mm
CZ-34025-BLK	Large	Capella Round Grid Bulkhead	15W	4000k	750	50	Proj:60mm Dia:195mm



## Key Features

- 220-240V
- Polycarbonate with durable glass cover
- Protective grille
- Corrosion resistant



Class 2



1.06kg

# PUCK

## Oval Eyelid Bulkhead

IP44

Splashproof  
from any angle

5Y


5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-25142-BLK	Puck Oval Eyelid Bulkhead	1 x 42W Max E27 GLS	Proj:110mm W:260mm H:150mm



## Key Features

- 220-240V
- Polycarbonate & glass construction
- Corrosion resistant



Class 1 0.69kg

## MARS

### Round Bulkhead

IP44

5Y

Splashproof  
from any angle

5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-20947-BLK	Mars Round Bulkhead	1 x 42W Max E27 GLS	Proj:100mm Dia:180mm





CZ-34023-BLK

### Key Features

- 220-240V
- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted
- 25,000 Hours lifespan
- PIR sensor



Class 2



CZ-33397-BLK

## CANO

### Round Bulkhead

4000K

Cool White

IP65

Ideal for use outdoors

LED

Integral LED

Up to  
750  
Lumens

Up to  
750lm



PIR  
Sensor

6M

Detection  
Distance  
Max 6m

5Y

5 Year  
Guarantee

Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-33397-BLK	Small	Cano Round PIR Bulkhead	8W	4000k	400	50	Proj:57mm Dia:155mm
CZ-34023-BLK	Large	Cano Round PIR Bulkhead	15W	4000k	750	50	Proj:60mm Dia:195mm





CZ-34015-BLK

### Key Features

- 220-240V
- Black PC / Opal diffuser
- Corrosion resistant
- 25,000 hours lifespan
- With or without PIR sensor



Class 2



CZ-34014-BLK

## TURUS

### Round Bulkhead



Switch between 3000K, 4000K & 6000K



Ideal for use outdoors




Integral LED



Up to 840lm



PIR sensor version available



Detection Distance Max 6m



5 Year Guarantee

Code	Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34014-BLK	-	Turus Round Bulkhead	15W	4000k	1200	80	Proj:50mm Dia:170mm
CZ-34015-BLK	PIR	Turus Round Bulkhead	15W	4000k	840	56	Proj:50mm Dia:170mm



CZ-34017-BLK

### Key Features

- 220-240V
- Black PC / Opal diffuser
- Corrosion resistant
- 25,000 hours lifespan
- With or without PIR sensor



Class 2



CZ-34016-BLK

## TURUS

### Oval Bulkhead



Switch between 3000K, 4000K & 6000K



Ideal for use outdoors



Integral LED



Up to 840lm



PIR sensor version available



Detection Distance Max 6m



5 Year Guarantee


Code	Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34016-BLK	-	Turus Oval Bulkhead	15W	4000k	1200	80	H:210mm W:115mm Proj:55mm
CZ-34017-BLK	PIR	Turus Oval Bulkhead	15W	4000k	840	56	H:210mm W:115mm Proj:55mm





## Key Features

- 220-240V
- Polycarbonate and ABS construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 20,000 hours lifespan



Class 2 0.45kg

# OXFORD

## Round LED Bulkhead

**4000K**

Cool White

**IP65**

Ideal for use outdoors

**8W  
LED**

Integral LED

**584  
Lumens**

73lm/W

**5Y**


5 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31750-BLK	Oxford Round Bulkhead	8W	4000k	590	73	Proj:82mm Dia:213mm



### Key Features

- 220-240V
- Polycarbonate and ABS construction
- Corrosion resistant
- 20,000 hours lifespan



Class 2 0.31kg

## OXFORD

### Oval LED Bulkhead

<b>4000K</b>	<b>IP65</b>	<b>8W LED</b>	<b>504 Lumens</b>	<b>5Y</b>
--------------	-------------	-------------------	-----------------------	-----------

Cool White    Ideal for use outdoors    Integral LED    63lm/W    5 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31751-BLK	Oxford Oval Bulkhead	8W	4000k	510	63	H:142mm W: 213mm Proj:79mm



CZ-31743-BLK

### Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 20,000 hours lifespan



Class 2



CZ-31745-BLK

## RIPON LED Bulkhead

4000K

Cool White

IP65

Ideal for use outdoors

LED

Integral LED

Up to  
750  
Lumens

Up to  
750lm

5Y

5 Year  
Guarantee

Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31745-BLK	Small	Ripon LED Bulkhead	15W	4000k	900	60	Proj:44mm Dia:270mm
CZ-31743-BLK	Large	Ripon LED Bulkhead	18W	4000k	1245	70	Proj:44mm Dia:310mm



## Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant
- 20,000 hours lifespan



Class 2



1.1kg

## LUTON LED Wedge

**4000K**

Cool White

**IP65**

Ideal for use outdoors

**12W  
LED**

Integral LED

**648  
Lumens**

54lm/W

**5Y**


5 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31746-BLK	Luton LED Wedge	12W	4000k	648	64	Proj:99mm W:265mm H:98mm



### Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant
- Optional Hi-Lo dimmer function
- 20,000 hours lifespan



Class 2 1.45kg

## DERBY

### LED Wedge

4000K

Cool White

IP65

Ideal for use outdoors

21W  
LED

Integral LED

1260  
Lumens

60lm/W

5Y

5 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31740-BLK	Luton LED Wedge with Hi-Lo Dimmer	21W	4000k	1260	60	Proj:139mm W:320mm H:138mm

**NEW**



### Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant



Class 2

## IONA

Up/Down Wall Light



Splashproof from any angle



5 Year Guarantee

Code	Description	Lamp	Dimensions
CZ-35705-BLK	Iona Up/Down Wall Light	2 x 5W Max LED GU10	Proj:90mm W:70mm H:160mm

**NEW**



**Key Features**

- 220-240V
- Polycarbonate construction
- Corrosion resistant



Class 2

**IONA**  
Downlight



Splashproof  
from any angle



5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-35704-BLK	Iona Downlight	1 x 5W Max LED GU10	Proj:90mm W:70mm H:97mm



### Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant
- 6m detection distance



Class 2

## NESO

### Up/Down Wall Light

**IP44**

Splashproof



PIR  
Sensor

**6M**

Detection  
Distance  
Max 6m

**5Y**

5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-31744-BLK	Neso Up/Down Wall Light	2 x 7W Max LED GU10	Proj:110mm W:63mm H:205mm





## Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant



Class 2

# NESO

## Up/Down Wall Light

IP44

5Y

Splashproof  
from any angle

5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-25144-BLK	Neso Up/Down Wall Light	2 x 7W Max LED GU10	Proj:86mm W:81mm H:162mm



### Key Features

- 220-240V
- Polycarbonate construction
- Corrosion resistant



Class 2

## NESO Downlight

IP44

Splashproof  
from any angle

5Y

5 Year  
Guarantee

Code	Description	Lamp	Dimensions
CZ-25143-BLK	Neso Downlight	1 x 7W Max LED GU10	Proj:86mm W:81mm H:122mm

**NEW**



### Key Features

- 220-240V
- Marine grade 316 stainless steel construction
- Corrosion resistant




Class 1

## ISLAY

Up/Down Wall Light



Splashproof



Marine Grade  
Stainless Steel



5 Year  
Guarantee

Code	Description	Colour	Lamp	Dimensions
CZ-23920-BLK	Islay Up/Down Wall Light	Black	2 x 7W LED Max GU10	H:160mm W:70mm Proj:125mm
CZ-29320-SST	Islay Up/Down Wall Light	Stainless Steel		H:160mm W:70mm Proj:125mm



**NEW**



### Key Features

- 220-240V
- Marine grade 316 stainless steel construction
- Corrosion resistant
- PIR sensor
- Adjustable lux and timer



Class 1

## ISLAY

### PIR Up/Down Wall Light

<b>IP44</b>	<b>SS 316</b>		<b>7m</b>	<b>90°</b>	<b>5Y</b>
Splashproof	Marine Grade Stainless Steel	PIR Sensor	Detection Distance	Detection Angle	5 Year Guarantee

Code	Description	Colour	Lamp	Dimensions
CZ-29319-BLK	Islay PIR Up/Down Wall Light	Black	2 x 7W LED Max GU10	H:200mm W:70mm Proj:125mm
CZ-29319-SST	Islay PIR Up/Down Wall Light	Stainless Steel		H:200mm W:70mm Proj:125mm

**NEW**



### Key Features

- 220-240V
- Marine grade 316 stainless steel construction
- Corrosion resistant




Class 1

## ISLAY Spotlight



Splashproof



Marine Grade  
Stainless Steel



5 Year  
Guarantee

Code	Description	Colour	Lamp	Dimensions
CZ-23921-BLK	Islay Spotlight	Black	1 x 7W LED Max GU10	H:140mm W:70mm Proj:120mm
CZ-29321-SST	Islay Spotlight	Stainless Steel	1 x 7W LED Max GU10	H:140mm W:70mm Proj:120mm



## Key Features

- 220-240V
- Anthracite polycarbonate finish
- Corrosion resistant
- 20,000 hours lifespan



Class 2 0.16kg

## BREEZ

### Surface Brick/Guide Light

4000K

Cool White

IP65

Ideal for use outdoors

2W  
LED

Integral LED

180  
Lumens

90lm/W

5Y

5 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29193-ATR	Breez Surface Brick/Guide Light	2W	4000k	180	90	Proj:30mm Dia:128mm








### Key Features

- 220-240V
- Anthracite polycarbonate finish
- Corrosion resistant
- 20,000 hours lifespan



Class 2 0.19kg

## BREEZ

### Surface Brick/Guide Light

4000K

Cool White

IP65

Ideal for use outdoors

3W  
LED

Integral LED

280  
Lumens

93lm/W

5Y

5 Year Guarantee


Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29192-ATR	Breez Surface Brick/Guide Light	3W	4000k	290	93	Proj:30mm W:210mm H:85mm





### Key Features

- 220-240V
- Anthracite polycarbonate finish
- Corrosion resistant
- 20,000 hours lifespan



Class 2 0.19kg

## BREEZ

### Surface Brick/Guide Light

4000K

Cool White

IP65

Ideal for use outdoors

3W  
LED

Integral LED

280  
Lumens

93lm/W

5Y


5 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29191-ATR	Breez Surface Brick/Guide Light	3W	4000k	290	93	Proj:30mm W:210mm H:85mm



### Key Features

- 220-240V
- Black PC / Opal diffuser
- Corrosion resistant
- 20,000 hours lifespan
- With or without PIR sensor



Class 2 0.32kg

## POOLE LED Downlight

4000K

Cool White

IP65

Ideal for use outdoors

5W  
LED

Integral LED

360  
Lumens

72lm/W



PIR Sensor

6M

Detection Distance Max 6m

5Y


5 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31747-BLK	Poole Downlight with PIR	5W	4000k	360	72	Proj:51mm W:220mm H:113mm



### Key Features

- 220-240V
- Black PC / Opal diffuser
- Corrosion resistant
- 20,000 hours lifespan



## POOLE

### LED Up/Down Wall Light

4000K

Cool White

IP65

Ideal for use outdoors

12.5W  
LED

Integral LED

590  
Lumens

47lm/W

5Y

5 Year Guarantee



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31749-BLK	Poole LED Up/Down Wall Light	12.5W	4000k	590	47	Proj:78mm W:230mm H:110mm





**Key Features**

- 220-240V
- Black polycarbonate finish
- Corrosion resistant
- Attachable ground spike



  
 Class 2 0.34kg

# WELLS

## Dual Mount Ground/Spike Light

<b>IP65</b> <small>Ideal for use outdoors</small>	<b>0.4m</b> <small>0.4 Meter Cable</small>	<b>5Y</b> <small>5 Year Guarantee</small>
--	---	--

Code	Description	Lamp	Dimensions
CZ-31806-BLK	Wells Ground Light	1 x 6W Max LED GU10	Proj:130mm Dia:80mm H:273mm

CZ-34403-BLK



· removable fast-fit terminal connector



· fully adjustable & detachable bracket

### Key Features

- 220-240V
- Coated aluminium & polycarbonate construction
- Horizontally and vertically adjustable bracket
- Detachable bracket allowing for easy installation
- Removable terminal connector for ease of wiring
- 25,000 hours lifespan
- 120° beam angle
- Available in 20W / 30W / 50W versions



CZ-34402-BLK



CZ-34404-BLK



Class 1

## WHITBY

### LED Slimline Floodlight

6000K

Daylight White

LED

Integral LED

IP65

Ideal for use outdoors

Up to  
4000  
Lumens

Up to 4000lm

5Y

5 Year Guarantee

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
CZ-34402-BLK	Whitby LED Floodlight	20W LED	1600	0.59kg	H:100mm W:138mm Proj:89mm
CZ-34403-BLK		30W LED	2400	0.59kg	H:128mm W:179mm Proj:119mm
CZ-34404-BLK		50W LED	4000	0.81kg	H:154mm W:214mm Proj:124mm



CZ-34407-BLK



· removable fast-fit terminal connector



· fully adjustable & detachable bracket

### Key Features

- 220-240V
- Coated aluminium & polycarbonate construction
- Horizontally and vertically adjustable bracket
- Detachable bracket allowing for easy installation
- Removable terminal connector for ease of wiring
- 25,000 hours lifespan
- 120° beam angle
- Adjustable PIR sensor
- Available in 20W / 30W / 50W versions



CZ-34405-BLK



CZ-34406-BLK



Class 1

## FILEY

### LED Slimline Floodlight

6000K

Daylight White

LED

Integral LED

IP65

Ideal for use outdoors

Up to 4000 Lumens

Up to 4000lm



PIR Sensor

12M

Detection Distance Max 12m

5Y

5 Year Guarantee

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
CZ-34405-BLK	Filey LED Floodlight	20W LED	1600	0.61kg	H:149mm W:138mm Proj:89mm
CZ-34406-BLK		30W LED	2400	0.61kg	H:175mm W:179mm Proj:119mm
CZ-34407-BLK		50W LED	4000	0.91kg	H:205mm W:214mm Proj:124mm





ELECTRALITE

# COMMERCIAL

Great quality and installer friendly LED Commercial lighting, including our NEW LED range of tapes, downlights, bulkheads and battens.

LED STRIP	156-165
LED STRIP ACCESSORIES	166-171
UNDER CABINET	172
LED BATTENS	173-177
T-GRID LIGHTING	178-179
BULKHEADS	180-182
RECESSED	183-185

# PROFESSIONAL 24V LED STRIPS



3M 200MP high performance acrylic adhesives used on all professional LED strips.

Our high grade 24V LED strips are ideal if you require 5 meters or more in a single length. Built from the highest specification of components they are consistent in brightness and reliability as there is less current. Therefore, less voltage drop and less wiring is required. 24V strips or tapes are the choice of the professional installer.

## How to choose an LED strip

### 1. Choose LED type

Choose from White LED (single colour), or RGBW LED (16 selectable colour options). Available in a range of different variants to suit all applications.

### 2. Choose colour temperature

Choose from warm white, cool white and daylight white LED colour temperatures to suit your application. For RGB skip to step 3.

### 3. Choose installation environment

Select the protection you require for the installation environment. Choose from IP65 water resistant LED strip for wet areas or IP20 non water resistant LED strip for dry areas.

### 4. Choose profile

Designed to hold your LED strip, providing diffusion and protection. We offer a range of profiles, including surface mounted, recessed and corner mounted profiles.

### 5. Choose your driver

Calculate your overall wattage of the LED strip to be used. Then select your driver that is higher in wattage than your LED strip (tape).

### 6. Accessories

We offer strip connectors and strip live-end connectors for our full range of LED strip enabling you to cut and size your strip for any application or even extend LED strip where required.

### 7. Remote control receivers

Remote controlled receivers offer precise and user-friendly control over integral LED strip lighting, allowing you to change the colour and brightness of your room with the touch of a finger.



### Key Features

- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

## IP20 8MM 6W LED Strip

<b>IP20</b> 	<b>6W LED</b> 	<b>560 Lumens</b> 	<b>5m / 50m</b> 	<b>120°</b> 	<b>24V</b> 	<b>3Y</b> 	<b>3M 200MP</b> 
Applicable to dry environment	6W p/meter	Approx 560lm p/m	Reel Length	Beam Angle	Constant voltage	3 Year Guarantee	Adhesive backing

Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34280	Warm White	2700K	525	5.76W p/m	60	SMD2835	8mm	>80	5m
ELA-34281	Cool White	4000K	588						
ELA-34282	Daylight White	6000K	569						
ELA-34857	Warm White	2700K	525						
ELA-34858	Cool White	4000K	588						
ELA-34859	Daylight White	6000K	569						





## Key Features

- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

# IP65 8MM 6W

## LED Strip



Applicable to damp environment



6W p/meter



Approx 560lm p/m



Reel Length



Beam Angle



Constant voltage



3 Year Guarantee



Adhesive backing

Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34283	Warm White	2700K	525	5.76W p/m	60	SMD2835	8mm	>80	5m
ELA-34284	Cool White	4000K	588						
ELA-34285	Daylight White	6000K	569						
ELA-34860	Warm White	2700K	525						50m
ELA-34861	Cool White	4000K	588						
ELA-34862	Daylight White	6000K	569						



### Key Features

- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)



## IP20 10MM RGB 12W LED Strip

<b>IP20</b>	<b>12W LED</b>	<b>1000 Lumens</b>	<b>5m / 50m</b>	<b>120°</b>	<b>24V</b>	<b>3Y</b>	<b>3M 200MP</b>
-------------	----------------	--------------------	-----------------	-------------	------------	-----------	-----------------

Applicable to dry environment	12W p/meter	Approx 1000lm p/m	Reel Length	Beam Angle	Constant voltage	3 Year Guarantee	Adhesive backing
-------------------------------	-------------	-------------------	-------------	------------	------------------	------------------	------------------

Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34290	RGB	IP20	1000	11.52W p/m	60	SMD5050	10mm	>80	5m
ELA-34871									50m





### Key Features

- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)



## IP65 10MM RGB 12W LED Strip



Applicable to damp environment



12W p/meter



Approx 1000lm p/m



Reel Length



Beam Angle



Constant voltage



3 Year Guarantee



Adhesive backing

Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34291	RGB	IP65	1000	11.52W p/m	60	SMD5050	10mm	>80	5m
ELA-34872									50m





### Key Features

- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB/CCT remote control & receiver (page .100)



## IP65 12MM RGB/CCT 19.2W LED Strip

<b>IP65</b>	<b>19.2W LED</b>	<b>1000 Lumens</b>	<b>5m / 50m</b>	<b>120°</b>	<b>24V</b>	<b>3Y</b>	<b>3M 200MP</b>
-------------	------------------	--------------------	-----------------	-------------	------------	-----------	-----------------

Applicable to damp environment	19.2W p/meter	Approx 1000lm p/m	Reel Length	Beam Angle	Constant voltage	3 Year Guarantee	Adhesive backing
--------------------------------	---------------	-------------------	-------------	------------	------------------	------------------	------------------

Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34296	RGB/CCT	IP65	1000	19.2W p/m	60	SMD5050	12mm	>80	5m
ELA-34873									50m



**NEW**



**Key Features**

- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut every 62.5mm
- More flexible than SMD LED strip
- Spot free lighting array
- Very high colour rendering index producing true light colour RA>90. RA90
- Dimmable with receiver (page .100)



**COB IP20 8MM 12W**  
LED Strip


<b>IP20</b> 	<b>12W LED</b> 	<b>915 Lumens</b> 	<b>5m / 50m</b> 	<b>180°</b> 	<b>24V</b> 	<b>3Y</b> 	<b>3M 9080A</b> 
Applicable to dry environment	12W p/meter	Approx 915lm p/m	Reel Length	Beam Angle	Constant voltage	3 Year Guarantee	Adhesive backing

Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-35750	Warm White	3000K	896	12W p/m	512	COB	8mm	>90	5m
ELA-35751	Cool White	4000K	934						50m
ELA-35752	Warm White	3000K	896						50m
ELA-35753	Cool White	4000K	934						

# ALUMINIUM PROFILES



· Fits 8mm, 10mm & 12mm LED Strip

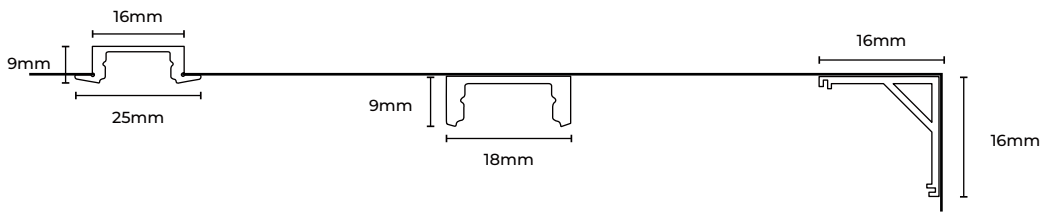

Recessed

Surface-mount

Corner



ELA-34308



ELA-34306



ELA-34307

Code	Description	Dimensions
ELA-34308	Aluminium Recessed Profile	L:2000mm W:25mm Proj:9mm
ELA-34306	Aluminium Surface-mount Profile	L:2000mm W:18mm Proj:9mm
ELA-34307	Aluminium 45° Corner Surface-mount Profile	L:2000mm W:16mm Proj:16mm

# LED DRIVERS

## Constant Voltage

ELA-34302



ELA-34301



ELA-34303



ELA-34300



ELA-34304



Code	Description	Weight	Dimensions
ELA-34300	LED Driver Constant Voltage 24V 36W	0.13kg	H:48mm W:45mm L:140mm
ELA-34301	LED Driver Constant Voltage 24V 60W	0.17kg	H:20mm W:40mm L:140mm
ELA-34302	LED Driver Constant Voltage 24V 100W	0.24kg	H:38mm W:53mm L:192mm
ELA-34303	IP67 LED Driver Constant Voltage 24V 60W	0.42kg	H:30mm W:58mm L:200mm
ELA-34304	IP67 LED Driver Constant Voltage 24V 150W	0.81kg	H:58mm W:82mm L:260mm
ELA-34305	IP67 LED Driver Constant Voltage 24V 200W	0.81kg	H:58mm W:82mm L:260mm

# LED RECEIVERS

## Remote Control

ELA-34286



ELA-34287



### Key Features

- Remote and controller are RF(radio frequency) not IR (infra-red)
- Compatible with single colour LED strip
- Smooth dimming and switch without any flickering

ELA-34292



ELA-34293



### Key Features

- Remote and controller are RF(radio frequency) not IR (infra-red)
- Compatible with single colour/RGB/RGBW LED strip
- Smooth dimming and switch without any flickering

Code	Description	Dimensions
ELA-34286	1 Channel LED Receiver	H:20mm W:37mm L:115mm
ELA-34287	1 Zone Programmable Remote Control	H:9mm W:59mm L:107mm
ELA-34292	4 Channel RGB/W LED Receiver	H:20mm W:37mm L:115mm
ELA-34293	4 Zones Programmable RGB/W Remote Control	H:9mm W:59mm L:107mm



# RGB/CCT Controller



## Key Features

- Kit includes Remote and controller
- RF(radio frequency) not IR (infra-red)
- Touch wheel for easy colour change
- RGB & CCT function
- Over 16 million colours to choose from
- Pre-set dynamic mode
- 0-100% brightness
- 30 meter control distance



Code

Description

Dimensions


ELA-34297

RGB/CCT LED Strip Controller & Remote Control

L:120mm W:44mm H:27mm

# LED STRIP CONNECTORS

Solder Free

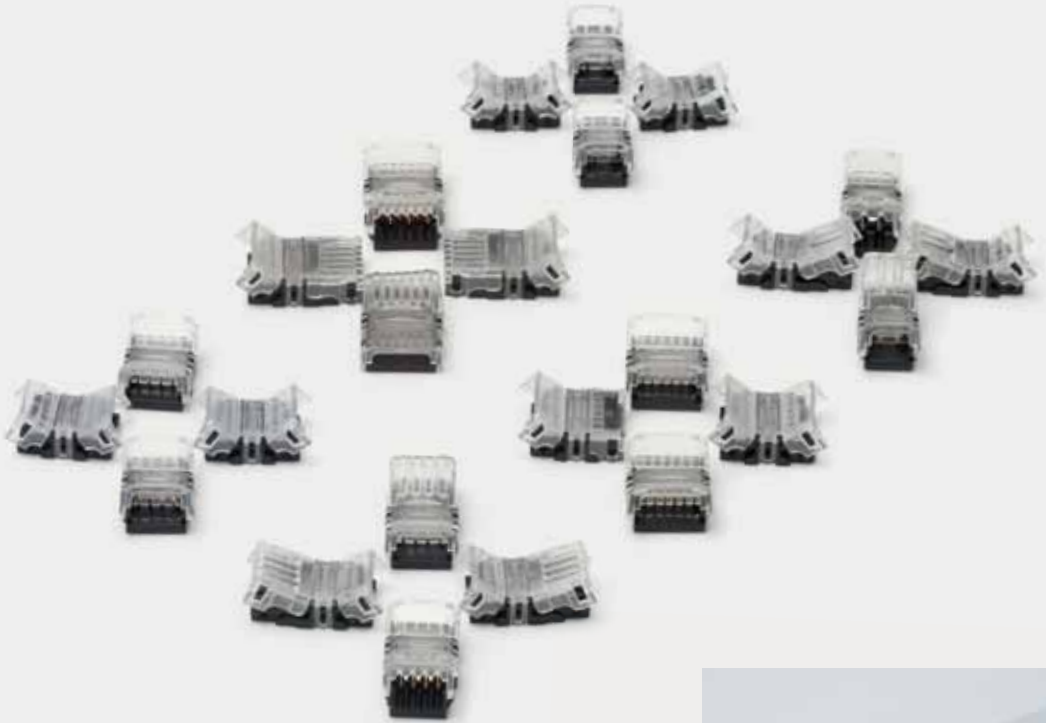

## Key Features

- Easy installation with click tight connectors
- Connect two strips together, end-to-end to make a longer length
- Run a gap in between your strip lights
- Connect power leads to an LED strip
- Make small connections around corners
- Available in 2 pin (8mm single colour strip), 3 pin (10mm RGB strip) and 5 pin (12mm RGB/CCT strip)
- For use with IP65 or IP20 LED strip
- LED strip sold separately



Code	Description	Fits
ELA-34288	2 pin Solder free Strip to Wire Live End	8mm LED Strip/Tape
ELA-34289	2 pin Solder free Strip to Strip Connector	8mm LED Strip/Tape
ELA-34294	3pin Solder free Strip to Wire Live End	10mm LED Strip/Tape
ELA-34295	3pin Solder free Strip to Strip Connector	10mm LED Strip/Tape
ELA-34298	6pin Solder free Strip to Wire Live End	12mm LED Strip/Tape
ELA-34299	6pin Solder free Strip to Strip Connector	12mm LED Strip/Tape

# LED STRIP CONNECTORS

Solder Free

NEW



## Key Features

- Solder free
- Easy installation
- Clips pierce from under the strip to prevent loosening

Code	Description	Fits
ELA-35747	LED Strip Quick Connector	Single Colour LED Strip
ELA-35748		RGB LED Strip
ELA-35749		RGB/CCT LED Strip
ELA-34873	LED Strip to Strip Corner Connector	8mm Strip
ELA-34874		10mm Strip
ELA-34875		12mm Strip



### Key Features

- 220-240V
- White PC body with opal diffuser
- Available in 3000/4000K
- ON/OFF rocker switch
- No driver required
- Supplied with 2m power lead
- Simple connection system



Class 2



Simple to butt connect fittings together

## BUDE

### Under Cabinet Link Light



Integral LED



2 Meter Power Cable



Up to 1200lm



3 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight	Length	Dimensions
ELA-28418	Bude Link Light	4W LED	3000	400	0.21kg	320mm	L:320mm W:27mm Proj:40mm
ELA-28419		7W LED	3000	700	0.3kg	480mm	L:480mm W:27mm Proj:40mm
ELA-28420		12W LED	3000	1000	0.4kg	880mm	L:880mm W:27mm Proj:40mm
ELA-28421		14W LED	3000	1200	0.59kg	1180mm	L:1180mm W:27mm Proj:40mm
ELA-28414		4W LED	4000	400	0.21kg	320mm	L:320mm W:27mm Proj:40mm
ELA-28515		7W LED	4000	700	0.3kg	480mm	L:480mm W:27mm Proj:40mm
ELA-28516		12W LED	4000	1000	0.4kg	880mm	L:880mm W:27mm Proj:40mm
ELA-28517		14W LED	4000	1200	0.59kg	1180mm	L:1180mm W:27mm Proj:40mm



### Key Features

- 220-240V
- Aluminium body with polycarbonate diffuser
- No driver required
- Choice of 3000K, 4000K and 6000K in the 1500/1800mm lengths
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available



• 7mm clip



• 20mm clip



Class 2

## RENO LED Batten



Integral LED




Up to 3600lm



3 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30698	Reno LED Batten	20W LED	3000	1800	600mm	L:600mm W:75mm Proj:24mm
CUL-30700		30W LED	3000	2690	900mm	L:900mm W:75mm Proj:24mm
CUL-30702		40W LED	3000	3600	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30699		20W LED	4000	1850	600mm	L:600mm W:75mm Proj:24mm
CUL-30701		30W LED	4000	2730	900mm	L:900mm W:75mm Proj:24mm
CUL-30703		40W LED	4000	3650	1200mm	L:1200mm W:75mm Proj:24mm

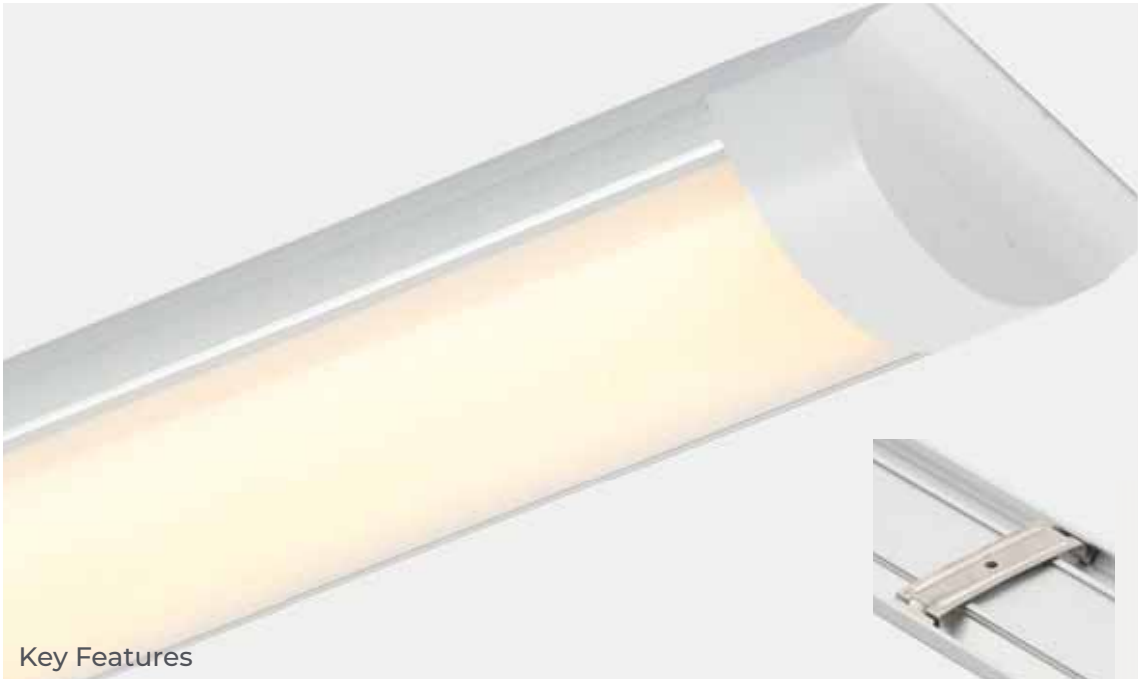

### Key Features

- 220-240V
- Aluminium body with polycarbonate diffuser
- No driver required
- Choice of 3000K, 4000K and 6000K in the 1500/1800mm lengths
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available



• 7mm clip



• 20mm clip



Class 2

## RENO LED Batten



Integral LED



Up to 6000lm



3 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30704	Reno LED Batten	60W LED	3000	5200	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30707		80W LED	3000	6600	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30705		60W LED	4000	5300	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30708		80W LED	4000	6700	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30706		60W LED	6000	5500	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30709		80W LED	6000	6900	1800mm	L:1800mm W:75mm Proj:24mm

# SUSPENSION KIT



Code	Description	Dimensions
CUL-30710	Reno 1m Suspension Kit	L:1000mm
CUL-30711	Reno 2m Suspension Kit	L:2000mm

**NEW**

**FITS**  
RENO  
SUSPENSION  
KIT



### Key Features

#### All Versions

- Polycarbonate body
- High efficiency 100lm/w
- Switch between either 3000K, 4000K or 6000K
- Long life 35,000 hours or 100,000 switching cycles
- Instant full light
- Fast-fit terminal block for easy installation

#### Microwave motion sensor

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable

#### Emergency

- 3 hour emergency function

## MECA

### LED Batten



Switch between  
3000K, 4000K  
& 6000K




SMD  
LED



Up to  
7200lm



35000hrs  
LED Lifetime



Beam  
Angle



Optional  
Microwave  
Sensor



Optional  
Emergency  
Function




3 Year  
Guarantee

Code	Emergency / Sensor	Length	Power (W)	Total Flux (lm)	Colour (k)	Efficiency (lm/W)	Beam Angle	CRI
ELA-35692	-							
ELA-35693	Sensor	1200mm	40W	4000	CCT	100	120°	>80
ELA-35694	Emergency							
ELA-35695	Emergency & Sensor							
ELA-35696	-							
ELA-35697	Sensor	1500mm	60W	6000	CCT	100	120°	>80
ELA-35698	Emergency							
ELA-35699	Emergency & Sensor							
ELA-35700	-							
ELA-35701	Sensor	1800mm	72W	7200	CCT	100	120°	>80
ELA-35702	Emergency							
ELA-35703	Emergency & Sensor							



**NEW**

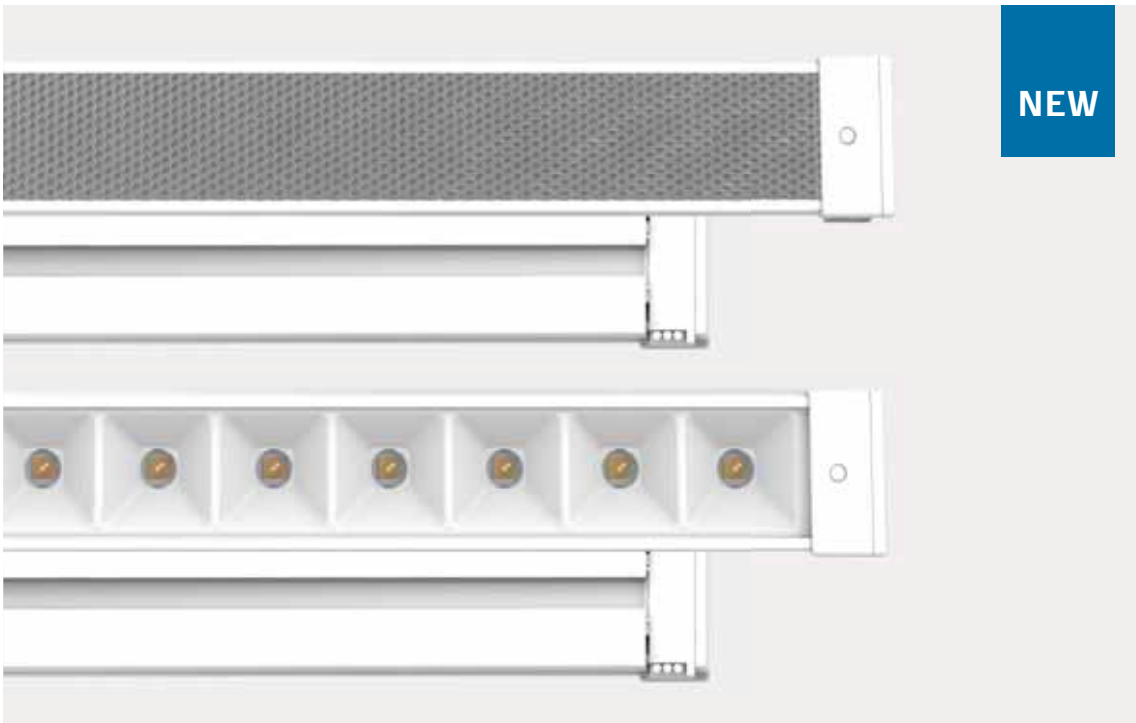

### Key Features

- An innovative lighting fixture that takes the place of LED panels
- Engineered to work with 15mm , 24mm & 25mm T-Grid ceilings
- Simple to install (Up to 60% faster Installation)
- Reduces installation costs
- Even light distribution
- Improves ceiling appearance



## GAMMA

### LED T-Grid Lighting

<b>4000K</b>	<b>LED</b>	Up to <b>3700 Lumens</b>	<b>90°</b>	<b>3Y</b>
Cool White	SMD LED	Up to 3700lm	Beam Angle	3 Year Guarantee

Code	Description	PCS	Finish	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Length
ELA-35745	14W T-Grid Kit with Driver	2 Pack	Lens	4000k	1764	126	>80	580mm
ELA-35743	15W T-Grid Kit with Driver	2 Pack	Prismatic	4000k	1545	103	>80	
ELA-35746	28W T-Grid Kit with Driver	1 Pack	Lens	4000k	3696	132	>80	1180mm
ELA-35744	30W T-Grid Kit with Driver	1 Pack	Prismatic	4000k	2970	99	>80	



# GAMMA LED T-GRID LIGHTING SOLUTIONS


The Gamma LED T-Grid is an innovative lighting product solution for T-Grid suspension ceilings. Engineered to work with 15mm, 24mm and 25mm T-Grid ceiling structures in order to minimise building materials and waste. Also helping reduce installation costs and improve ceiling appearance.

## Works with different tile edges:

15mm T-Grid Bar




24mm T-Grid Bar



## Remarkable installation savings:

### Installation steps:

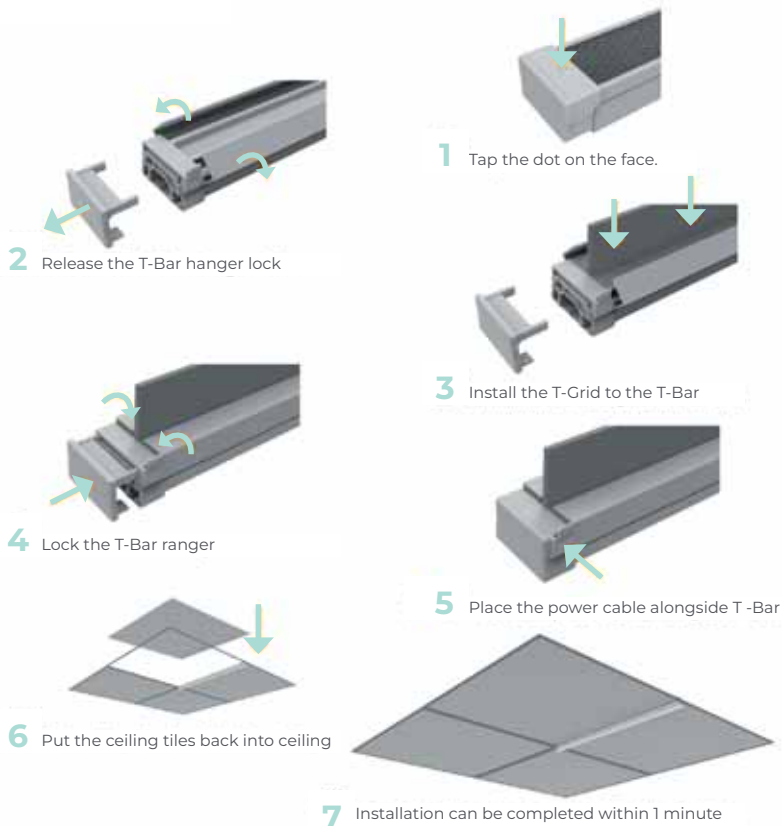





## Key Features

### All Versions

- 220-240V
- White PC body with opal diffuser
- Slimline profile
- Quick release mounting bracket
- Ceiling or wall mounted
- Vandal resistant
- Switch between 3000K/4000K/6000K

### Microwave motion sensor

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable

### Emergency

- 3 hour emergency function



Class 2



Emergency Backup



0.99kg



## RIGA LED Bulkhead



Switch between  
3000K, 4000K  
& 6000K




Integral LED



85lm/W



Splashproof  
from any angle



Impact  
protection



Microwave  
Sensor



Detection  
Distance  
Max 6m



Emergency  
Function



3 Year  
Guarantee

Code	Emergency / Sensor	Description	Power (w)	Total Flux (lm)	Dimensions
ELA-34866	-	Riga LED Bulkhead	18W	1530	Proj:50mm Dia:280mm
ELA-34867	Sensor				
ELA-34868	Emergency				
ELA-34869	Emergency & Sensor				



ELA-28093-CHR



### Key Features

- 220-240V
- White PC body with opal diffuser
- Ceiling or wall mounted
- Vandal resistant

### Microwave motion sensor

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable

### Emergency

- Maintained emergency function
- 3 hour emergency function



Class 2



Emergency Backup



1.13kg

## HALE

### LED Bulkhead

4000K

Cool White

14W  
LED

Integral LED

1200  
Lumens

85lm/W

IP54

Splashproof from any angle

IK09

Impact protection



Microwave Sensor

6M

Detection Distance Max 6m



Emergency Function

3Y

3 Year Guarantee

Code	Emergency / Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ELA-28101-OPL	-	Hale LED Bulkhead	14W	4000K	1200	Proj:78mm Dia:315mm
ELA-28102-OPL	Sensor					
ELA-28103-OPL	Emergency					
ELA-28104-OPL	Emergency & Sensor					
ELA-28093-CHR	-	Chrome Trim	-	-	-	Dia:315mm



• Fast-fit connector box

### Key Features

- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in satin nickel, chrome, black chrome, white plus new finishes in matt black & satin brass



Class 1



Fire-rated



72mm  
Cut-out



0.3kg

# YATE

## Fixed Fire Rated Downlight

**FAST  
FIT**

Fast-fit  
Connector Box

Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27465-WHT	White	IP20	1 x 50W Max GU10	Ø72mm	Dia:80mm Proj:115mm H:135mm
ELA-27465-CHR	Chrome				
ELA-27465-BCHR	Black Chrome				
ELA-27465-SCHR	Satin Chrome				
ELA-27465-MBLK	Matt Black <b>NEW</b>				
ELA-27465-SBRS	Satin Brass <b>NEW</b>				



**NEW**  
COLOUR  
OPTIONS



• Fast-fit connector box

### Key Features

- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in satin nickel, chrome, black chrome, white plus new finishes in matt black & satin brass



Class 1



Fire-rated



85mm  
Cut-out

# YATE

## Adjustable Fire Rated Downlight

**FAST  
FIT**

Fast-fit  
Connector Box

Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27466-WHT	White	IP20	1 x 50W Max GU10	Ø85mm	Dia:93mm Proj:120mm H:135mm
ELA-27466-CHR	Chrome				
ELA-27466-BCHR	Black Chrome				
ELA-27466-SCHR	Satin Chrome				
ELA-27466-MBLK	Matt Black <b>NEW</b>				
ELA-27466-SBRS	Satin Brass <b>NEW</b>				





**NEW**  
COLOUR  
OPTIONS



### Key Features

- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in satin nickel, chrome, black chrome, white plus new finishes in matt black & satin brass



Class 1



Fire-rated



72mm  
Cut-out



- Fast-fit connector box

# YATE

## Fire Rated Downlight

**IP65**

For use in  
bathroom  
zone 1

**FAST  
FIT**

Fast-fit  
Connector Box

Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27467-WHT	White	IP65	1 x 50W Max GU10	Ø72mm	Dia:80mm Proj:115mm H:125mm
ELA-27467-CHR	Chrome				
ELA-27467-BCHR	Black Chrome				
ELA-27467-SCHR	Satin Chrome				
ELA-27467-MBLK	Matt Black <b>NEW</b>				
ELA-27467-SBRS	Satin Brass <b>NEW</b>				



## BATHROOM

A beautiful range of decorative lighting and mirrors, designed to brighten any bathroom.

<b>COLLECTIONS</b>	<b>188-213</b>
<b>LED</b>	<b>214-225</b>
<b>SPOTLIGHTS</b>	<b>226-232</b>
<b>CEILING</b>	<b>233-243</b>
<b>RECESSED</b>	<b>244-248</b>
<b>WALL</b>	<b>249-255</b>
<b>MIRRORS</b>	<b>256-267</b>
<b>BIDET SEAT</b>	<b>268-271</b>





### Key Features

- 220-240V
- Chrome finish
- Clear chiselled crystal droplets



Class 1



7.1kg

## BELLE

### 4 Light Chandelier

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SPA-24677-CHR	Belle 4 Light Chandelier	4 x 28W Max C9	H:1140mm Dia:450mm



### Key Features

- 220-240V
- Chrome finish
- Clear chiselled crystal droplets



Class 1



3.5kg

## BELLE

### 3 Light Semi-flush

**IP44**


Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SPA-24678-CHR	Belle 3 Light Semi-flush	3 x 28W Max G9	H:398mm Dia:300mm



### Key Features

- 220-240V
- Chrome finish
- Clear crystal shades
- Adjustable chain length



Class 1 6.5kg

## PEGASI

### 9 Light Chandelier

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SPA-33929-CHR	Pegasi 9 Light Chandelier	9 x 18W Max G9	H:1200mm Dia:550mm







SPA-33930-CHR

## Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

# PEGASI

## Flush Chandelier

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Weight	Dimensions
SPA-33930-CHR	Pegasi 5 Light Flush	5 x 18W Max G9	3.58kg	H:390mm Dia:480mm



### Key Features

- 220-240V
- Chrome finish
- Clear chiselled crystal shades



Class 1

## PEGASI

### 3 Light Semi-flush

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SPA-33974-CHR	Pegasi 3 Light Semi-flush	3 x 18W Max G9	H:370mm Dia:440mm



SPA-33931-CHR



SPA-33932-CHR

### Key Features

- 220-240V
- Chrome finish
- Clear chiselled crystal shades



Class 1

## PEGASI Wall Light

**IP44**

Splashproof  
from any angle


Code	Description	Lamp	Weight	Dimensions
SPA-33931-CHR	Pegasi Shield Wall Light	1 x 18W Max G9	1.25kg	H:200mm W:160mm Proj:82mm
SPA-33932-CHR	Pegasi Wall Light	1 x 18W Max G9	0.77kg	H:195mm W:110mm Proj:175mm





### Key Features

- 220-240V
- Available in chrome & brass
- Clear glass crystal droplets



Class 1 6.4kg

## VELA


### 9 Light Chandelier

**IP44**

Splashproof from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-19714-CHR	Chrome	Vela 9 Light Chandelier	9 x 28W Max G9	H:1060mm Dia:580mm
SPA-19714-BRS	Brass			



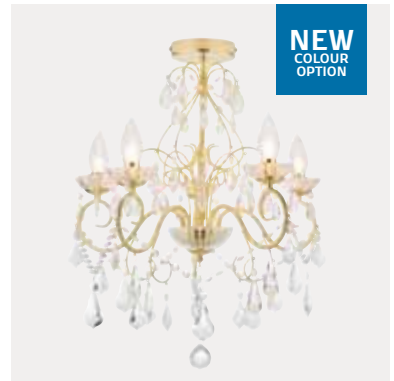

### Key Features

- 220-240V
- Available in chrome & brass
- Clear glass crystal droplets



Class 1 3.9kg

## VELA

### Flush Chandelier

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-19713-CHR	Chrome	Vela 5 Light Flush	5 x 28W Max G9	H:620mm Dia:500mm
SPA-19713-BRS	Brass			



### Key Features

- 220-240V
- Available in chrome & brass
- Clear glass crystal droplets



Class 1 2.6kg

## VELA

### Flush Chandelier

**IP44**

Splashproof from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-20182-CHR	Chrome	Vela 3 Light Flush	3 x 28W Max G9	H:520mm Dia:450mm
SPA-20182-BRS	Brass			





### Key Features

- 220-240V
- Available in chrome & brass
- Clear glass crystal droplets



## VELA

### Wall Light

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-20831-CHR	Chrome	Vela Wall Light	2 x 28W Max G9	Proj:170mm W:285mm H:335mm
SPA-20831-BRS	Brass			

**3**  
SIZES  
AVAILABLE



### Key Features

- 220-240V
- Available in chrome & satin brass
- Clear crystal droplets

**NEW**  
COLOUR  
OPTIONS



Class 1

## CELESTE

### Crystal Flush

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-24869-CHR	Chrome	Celeste 4 Light Flush	4 x 28W Max G9	H:260mm Dia:230mm
SPA-24870-CHR		Celeste 6 Light Flush	6 x 28W Max G9	H:260mm Dia:300mm
SPA-24871-CHR		Celeste 9 Light Flush	9 x 28W Max G9	H:298mm Dia:350mm
SPA-24869-BRS	Brass	Celeste 4 Light Flush	4 x 28W Max G9	H:260mm Dia:230mm
SPA-24870-BRS		Celeste 6 Light Flush	6 x 28W Max G9	H:260mm Dia:300mm
SPA-24871-BRS		Celeste 9 Light Flush	9 x 28W Max G9	H:298mm Dia:350mm

**2**  
SIZES  
AVAILABLE



**NEW**  
COLOUR  
OPTION



### Key Features

- 220-240V
- Chrome & brass finishes
- Clear crystal droplets



Class 1

# ORLANDO

## Square Flush

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Weight	Dimensions
SPA-24468-CHR	Chrome	Orlando 4 Light Flush	4 x 28W Max G9	2.36kg	L:230mm W:230mm H:189mm
SPA-24468-BRS	<b>NEW</b> Brass				
SPA-24467-CHR	Chrome	Orlando 5 Light Flush	5 x 28W Max G9	4kg	L:300mm W:300mm H:227mm
SPA-24467-BRS	<b>NEW</b> Brass				





### Key Features

- 220-240V
- Chrome finish
- Bulb covers



Class 1



## REENA

Ceiling/Wall Light

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Weight	Dimensions
SPA-28327-CHR	Reena 6 Light Flush	6 x 28W Max G9	4.4kg	H:220mm Dia:660mm
SPA-28326-CHR	Reena 3 Light Flush	3 x 28W Max G9	1.7kg	H:190mm Dia:410mm
SPA-29195-CHR	Reena Wall Light	2 x 28W Max G9	1.0kg	Proj:138mm W:270mm H:140mm





### Key Features

- 220-240V
- Chrome finish with glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass



Class 1



## GENE

### Ceiling Light

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Weight	Dimensions
SPA-31726-CHR	Chrome	Gene Cyclinder Ceiling Light	3 x 18W Max G9	1.58kg	H:379mm Dia:424mm
SPA-31726-SATBRS	Satin Brass <b>NEW</b>				





**NEW**  
COLOUR  
OPTION



### Key Features

- 220-240V
- Chrome finish with glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass



Class 1

## GENE

Wall Light

**IP44**


Splashproof  
from any angle

Code	Finish	Description	Lamp	Weight	Dimensions
SPA-31725-CHR	Chrome	Gene Cylinder Wall Light	1 x 18W Max G9	0.55kg	H:205mm W:100mm Proj:165mm
SPA-31725-SATBRS	Satin Brass	<b>NEW</b>			



### Key Features

- 220-240V
- Available in 3 finishes
- Matching items available



Class 1 0.58kg



## PORTO

### 1 Light Wall Light

**IP44**


Splashproof from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-31306-CHR	Chrome			
SPA-31306-MBLK	Matt Black <b>NEW</b>	Porto 1 Light Wall Light	1 x 28W Max G9	H:230mm W:120mm Proj:174mm
SPA-31306-SBRS	Brass <b>NEW</b>			



### Key Features

- 220-240V
- Available in 3 finishes
- Matching items available



Class 1 0.95kg

## PORTO

### 1 Light Semi-Flush

**IP44**

Splashproof from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-31309-CHR	Chrome			
SPA-31309-MBLK	Matt Black <b>NEW</b>	Porto 1 Light Semi-Flush	1 x 42W Max E27 GLS	H:340mm Dia:250mm
SPA-31309-SBRS	Brass <b>NEW</b>			



SPA-20280-CHR

## Key Features

- 220-240V
- Chrome finish
- Bulb covers



Class 1



SPA-20279-CHR

# OCTANS

## Ceiling Fitting

**IP44**


Splashproof  
from any angle

Code	Description	Lamp	Weight	Dimensions
SPA-20280-CHR	Octans 5 Light Ceiling Fitting	5 x 28W Max G9	3.1kg	H:240mm Dia:480mm
SPA-20279-CHR	Octans 3 Light Ceiling Fitting	3 x 28W Max G9	1.7kg	H:205mm Dia:410mm



### Key Features

- 220-240V
- Available in 3 finishes
- Decorative tubular shades



Class 1 1.25kg



## CRUX

### 3 Light Ceiling Fitting

**IP44**


Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-20829-CHR	Chrome			
SPA-20829-MBLK	Matt Black <b>NEW</b>	Crux 3 Light Ceiling Fitting	3 x 28W Max G9	H:225mm Dia:350mm
SPA-20829-SATBRS	Satin Brass <b>NEW</b>			



### Key Features

- 220-240V
- Chrome finish with opal shade
- 20,000 hours lifespan



Class 1 0.9kg

## MILAN

### 3 Light Spotlight Plate

**3000K**

Warm White

**15W**  
**LED**

Integral LED

**960**  
**Lumens**

64lm/W

**IP44**

Splashproof

**3Y**


3 Year  
Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31733-CHR	Milan 3 Light Spotlight Plate	15W	3000k	960	64	L:255mm W:290mm H:120mm



### Key Features

- 220-240V
- Chrome finish with opal shade
- 20,000 hours lifespan



Class 1 0.25kg

## MILAN Spotlight

**3000K**

Warm White

**5W  
LED**

Integral LED

**320  
Lumens**

64lm/W

**IP44**

Splashproof

**3Y**


3 Year  
Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31732-CHR	Milan Spotlight	5W	3000k	320	64	Proj:115mm W:85mm H:120mm



### Key Features

- 220-240V
- Chrome finish
- 20,000 hours lifespan



Class 1 2.25kg

## OSLO

### Crackle 8 Light Ceiling Fitting

**3000K**

Warm White

**10W**  
**LED**

Integral LED

**2960**  
Lumens

74lm/W

**IP44**

Splashproof

**3Y**

3 Year  
Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31730	Oslo 8 Ceiling Fitting	40W	3000k	2960	74	H:105mm W:250mm L:330mm





### Key Features

- 220-240V
- Chrome finish
- 20,000 hours lifespan



Class 1 0.45kg

## OSLO

### Crackle Wall Light

**3000K**

Warm White

**10W**  
**LED**

Integral LED

**740**  
Lumens

74lm/W

**IP44**

Splashproof

**3Y**

3 Year  
Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31730	Oslo Wall Light	10W	3000k	740	74	H:150mm W:90mm Proj:105mm



## Key Features

- 220-240V
- Chrome finish
- 20,000 hours lifespan



Class 1 1.53kg

# FELIX

## Bubble 4 Light Bar

**4000K**

Cool White

**20W**  
**LED**

Integral LED

**1480**  
**Lumens**

74lm/W

**IP44**

Splashproof

**3Y**


3 Year  
Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31780-CHR	Felix Bubble 4 Light Bar	20W	4000k	1480	74	L:774mm W:80mm H:140mm



### Key Features

- 220-240V
- Chrome finish
- 20,000 hours lifespan



Class 1 1.34kg

# FELIX

## 3 Light Bubble Spotlight

4000K

Cool White

15W  
LED

Integral LED

1100  
Lumens

74lm/W

IP44

Splashproof

3Y

3 Year  
Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31735-CHR	Felix 3 Light Bubble Spotlight	15W	4000k	1100	74	H:115mm Dia:200mm



### Key Features

- 220-240V
- Chrome finish
- 20,000 hours lifespan



Class 1 0.48kg

## FELIX

### Bubble LED Spotlight

4000K

Cool White

5W  
LED

Integral LED

370  
Lumens

74lm/W

IP44

Splashproof

3Y

3 Year  
Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31777-CHR	Felix Bubble LED Spotlight	5W	4000k	370	74	Proj:120mm W:80mm H:115mm



### Key Features

- 220-240V
- Chrome finish
- 20,000 hours lifespan
- Acrylic bubble effect



Class 1 0.56kg

## BUBBLE

### LED Spotlight

<b>3000K</b>	<b>5W</b> <i>LED</i>	<b>350</b> Lumens	<b>IP44</b>	<b>3Y</b>
Warm White	Integral LED	70lm/W	Splashproof	3 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30781-CHR	Bubble LED Spotlight	5W	3000k	350	70	Proj:140mm W:110mm H:130mm



### Key Features

- 220-240V
- Chrome finish
- 20,000 hours lifespan
- Acrylic bubble effect



Class 1 1.4kg

## BUBBLE

### 3 Light Spotlight


<b>3000K</b>	<b>15W</b> <i>LED</i>	<b>1050</b> Lumens	<b>IP44</b>	<b>3Y</b>
Warm White	Integral LED	70lm/W	Splashproof	3 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30782-CHR	Bubble 3 Light LED Spotlight	15W	3000k	1050	70	H:130mm Dia:340mm



### Key Features

- 220-240V
- Chrome finish
- 20,000 hours lifespan
- Opal acrylic diffuser



Class 2 1.14kg

## AMALFI

### 3 Light Flush

4000K

Cool White

15W  
LED

Integral LED

950  
Lumens

63lm/W

IP44

Splashproof

3Y


3 Year  
Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31736-CHR	Amalfi 3 Light Flush	15W	4000k	950	63	H:65mm Dia:250mm



### Key Features

- 220-240V
- Chrome finish
- 20,000 hours lifespan
- Opal acrylic diffuser



Class 2 1.17kg

## AMALFI

### 4 Light Bar

4000K

Cool White

20W  
LED

Integral LED

1350  
Lumens

67lm/W

IP44

Splashproof

3Y

3 Year  
Guarantee


Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31737-CHR	Amalfi 4 Light Bar	20W	4000k	1350	67	L:530mm W:110mm H:65mm





### Key Features

- 220-240V
- Chrome finish
- 20,000 hours ifespan
- Opal acrylic diffuser



## RHEA

### Wall Light

<b>3000K</b>	<b>4.2W</b> <i>LED</i>	<b>280</b> Lumens	<b>IP44</b>	<b>3Y</b>
Warm White	Integral LED	67lm/W	Splashproof	3 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-23617	Rhea Wall Light	4.2W	3000k	280	66	W:90mm H:90mm Proj:136mm

NEW



### Key Features

- 220-240V
- Chrome finish
- Directable spotlights



Class 1 1.25kg

## FREYA

### 3 Light Spotlight

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SPA-35080-CHR	Freya 3 Light Spotlight	3 x 35W Max GU10	H:140mm W:280mm L:220mm

NEW



### Key Features

- 220-240V
- Chrome finish
- Directable spotlights



Class 1 1.25kg



## FREYA

### 4 Light Bar Spotlight

IP44

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SPA-35081-CHR	Freya 4 Light Bar Spotlight	4 x 35W Max GU10	H:140mm W:620mm L:80mm





### Key Features

- 220-240V
- Available in 3 finishes
- Directable spotlights



Class 1 2.26kg

# SCORPIUS

## Bar Spotlight

**IP44**

Splashproof from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-22560-CHR	Chrome	Scorpius 4 Light Bar Spotlight	4 x 35W Max GU10	L:620mm W:80mm H:140mm
SPA-22560-MBLK	Matt Black <b>NEW</b>			
SPA-22560-BRS	Brass <b>NEW</b>			



## Key Features

- 220-240V
- Available in 3 finishes
- Directable spotlights



Class 1 1.27kg



# SCORPIUS

## 3 Light Spotlight

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-27405-CHR	Chrome			
SPA-27405-MBLK	Matt Black	Scorpilus 3 Light Spotlight	3 x 35W Max GU10	L:280mm W:220mm H:140mm
SPA-27405-BRS	Brass			



SPA-22560-CHR

### Key Features

- 220-240V
- Chrome finish
- Directable spotlights



Class 1 1.02kg

## SCORPIUS

### Bar Spotlight

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Weight	Dimensions
SPA-31292-CHR	Scorpius 2 Light bar	2 x 35W Max GU10	1.02kg	L:250mm W:80mm H:140mm



## Key Features

- 220-240V
- Chrome finish
- Directable spotlights



Class 1 0.95kg

# SCORPIUS

## Spotlight

**IP44**

Splashproof  
from any angle


Code	Description	Lamp	Dimensions
SPA-27401-CHR	Scorpilus Spotlight	1 x 35W Max GU10	H:170mm W:100mm Proj:150mm





### Key Features

- 220-240V
- Frosted glass
- Soft glow lighting



Class 1 1.65kg

## CARINA

Flush Ceiling Fitting

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SPA-AS-2831-CHR	Carina Flush Ceiling Fitting	1 x 42W Max E27 GLS Bulb	H:88mm Dia:370mm

2  
SIZES  
AVAILABLE



### Key Features

- 220-240V
- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options
- 20,000 hours lifespan



Class 2

## DELPHI LED Flush

<b>4000K</b>	<b>IP44</b>	<i>LED</i>	Up to <b>900 Lumens</b>	<b>3Y</b>
Cool White	Splashproof from any angle	Integral LED	Up to 900lm	3 Year Guarantee

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-34046-CHR	Chrome	Delphi Small LED Flush	12W	4000k	600	50	>80	H:55mm Dia:180mm
SPA-34046-SNIC	Satin Nickel							
SPA-34046-BRS	Brass <b>NEW</b>							
SPA-34046-SATBLK	Satin Black <b>NEW</b>							
SPA-34047-CHR	Chrome	Delphi Large LED Flush	18W	4000k	900	50	>80	H:85mm Dia:310mm
SPA-34047-SNIC	Satin Nickel							
SPA-34047-BRS	Brass <b>NEW</b>							
SPA-34047-SATBLK	Satin Black <b>NEW</b>							

2  
SIZES  
AVAILABLE



### Key Features

- 220-240V
- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options



Class 2

## DELPHI Flush


**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-34049-CHR	Chrome	Delphi Small Flush	1 x 28W Max E14 Candle	H:55mm Dia:180mm
SPA-34049-SNIC	Satin Nickel			
SPA-34049-BRS	Brass <b>NEW</b>			
SPA-34049-SATBLK	Satin Black <b>NEW</b>			
SPA-34050-CHR	Chrome	Delphi Large Flush	2 x 28W Max E27 GLS	H:85mm Dia:310mm
SPA-34050-SNIC	Satin Nickel			
SPA-34050-BRS	Brass <b>NEW</b>			
SPA-34050-SATBLK	Satin Black <b>NEW</b>			

# TAURI MULTI-FUNCTION LED WALL/CEILING LIGHT

The 5 in 1 multi-function light can be installed recessed, or surface mounted on either the ceiling or wall. It has 3CCT technology switchable between 3000K, 4000K and 6000K. The bracket is easily adjustable to fit different cut sizes. Only 15mm in thickness and available in a standard white finish. Chrome and satin nickel bezels available.

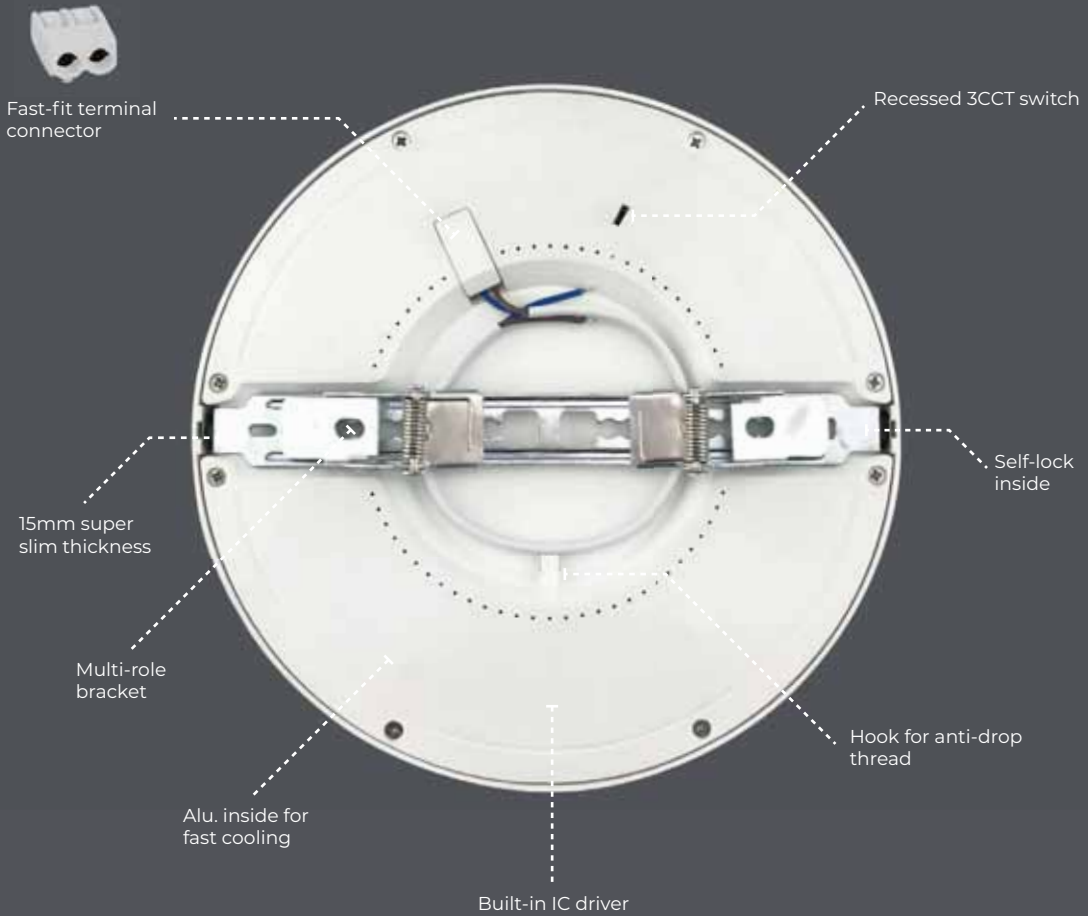

## Slideable spring multi-role bracket



**NEW**  
COLOUR  
OPTIONS



### Key Features

- 220-240V
- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch



Class 2

## TAURI

6W LED Wall/Ceiling 5 in 1 Light




Switch between  
3000K, 4000K  
& 6000K



Integral LED



100lm/W



Splashproof  
from any angle



Cut-out  
size



3 Year  
Guarantee

Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-34008-WHT	White	Tauri LED Light	6W LED	600	0.3kg	H:15mm Dia:139mm
SPA-34010-SNIC	Satin Nickel	Tauri Magnetic Ring (Fits 6W model)	-	-	0.11kg	H:15mm Dia:139mm
SPA-34012-CHR	Chrome					
SPA-35711	<b>NEW</b> Satin Black					
SPA-35712	<b>NEW</b> Satin Brass					



**NEW**



### Key Features

- 220-240V
- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



Class 2

- Multi-role bracket and CCT switch

## TAURI

12W LED Wall/Ceiling 5 in 1 Light



Switch between 3000K, 4000K & 6000K



Integral LED



100lm/W



Splashproof from any angle



Cut-out size 55-125mm



3 Year Guarantee

Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-35709	White	Tauri LED Light	12W LED	1200	0.42kg	H:15mm Dia:164mm
SPA-35713	Satin Nickel	Tauri Magnetic Ring (Fits 12W model)	-	-	0.17kg	H:15mm Dia:164mm
SPA-35716	Chrome					
SPA-35714	Satin Black					
SPA-35715	Satin Brass					

**NEW**  
COLOUR  
OPTIONS



### Key Features

- 220-240V
- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



Class 2

- Multi-role bracket and CCT switch

## TAURI

18W LED Wall/Ceiling 5 in 1 Light




Switch between  
3000K, 4000K  
& 6000K



Integral LED



100lm/W



Splashproof  
from any angle



Cut-out  
size



3 Year  
Guarantee

Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-34009-WHT	White	Tauri LED Light	18W LED	1800	0.58kg	H:15mm Dia:217mm
SPA-34011-SNIC	Satin Nickel	Tauri Magnetic Ring (Fits 18W model)	-	-	0.21kg	H:15mm Dia:217mm
SPA-34013-CHR	Chrome					
SPA-35717	<b>NEW</b> Satin Black					
SPA-35718	<b>NEW</b> Satin Brass					



**NEW**



**Key Features**



- 220-240V
- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



Class 2

- Multi-role bracket and CCT switch

**TAURI**  
24W LED Wall/Ceiling 5 in 1 Light



Switch between 3000K, 4000K & 6000K

Integral LED

100lm/W

Splashproof from any angle

Cut-out size

3 Year Guarantee

Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-35710	White	Tauri LED Light	24W LED	2400	0.66kg	H:15mm Dia:290mm
SPA-35719	Satin Nickel	Tauri Magnetic Ring (Fits 24W model)	-	-	0.27kg	H:15mm Dia:290mm
SPA-35722	Chrome					
SPA-35720	Satin Black					
SPA-35721	Satin Brass					



## Key Features

### All Versions

- 220-240V
- White PC body with opal diffuser
- Slimline profile
- Quick release mounting bracket
- Ceiling or wall mounted
- Vandal resistant
- Switch between 3000K/4000K/6000K

### Microwave motion sensor

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable

### Emergency

- 3 hour emergency function



Class 2



Emergency Backup



0.99kg



## RIGA LED Bulkhead



Switch between 3000K, 4000K & 6000K




Integral LED



85lm/W



Splashproof from any angle



Impact protection



Microwave Sensor



Detection Distance Max 6m



Emergency Function



3 Year Guarantee

Code	Emergency / Sensor	Description	Power (w)	Total Flux (lm)	Dimensions
ELA-34866	-	Riga LED Bulkhead	18W	1530	Proj:50mm Dia:280mm
ELA-34867	Sensor				
ELA-34868	Emergency				
ELA-34869	Emergency & Sensor				



ELA-28093-CHR



### Key Features

- 220-240V
- White PC body with opal diffuser
- Ceiling or wall mounted
- Vandal resistant

### Microwave motion sensor

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable



Class 2   Emergency Backup   1.13kg

### Emergency

- Maintained emergency function
- 3 hour emergency function

## HALE LED Bulkhead


<b>4000K</b>	<b>14W</b> LED	<b>1200</b> Lumens	<b>IP54</b>	<b>IK09</b>		<b>6M</b>		<b>3Y</b>
Cool White	Integral LED	85lm/W	Splashproof from any angle	Impact protection	Microwave Sensor	Detection Distance Max 6m	Emergency Function	3 Year Guarantee

Code	Emergency / Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ELA-28101-OPL	-	Hale LED Bulkhead	14W	4000K	1200	Proj:78mm Dia:315mm
ELA-28102-OPL	Sensor					
ELA-28103-OPL	Emergency					
ELA-28104-OPL	Emergency & Sensor					
ELA-28093-CHR	-	Chrome Trim	-	-	-	Dia:315mm



### Key Features

- 220-240V
- Die-cast aluminium construction
- Adjustable tilt, max 40°
- Available in 5 different finishes



Class 2

0.16kg

78mm  
Cut-out

## CALI

### Tiltable Downlight

**IP65**

Ideal for zone 1  
bathroom use


Code	Finish	Description	Lamp	Dimensions
SPA-30841-MWHT	Matt White	Cali Tiltable Circular Downlight	1 x 35W Max GU10	Dia:92mm H:115mm
SPA-30842-CHR	Chrome			
SPA-30842-SCHR	Satin Chrome			
SPA-30841-MBLK	<b>NEW</b> Matt Black			
SPA-30842-SBRS	<b>NEW</b> Satin Brass			

NEW



### Key Features

- 220-240V
- Die-cast aluminium construction



Class 2 0.17kg 78mm Cut-out



## CALI

Tiltable Downlight

IP65

Ideal for zone 1 bathroom use

Code	Finish	Description	Lamp	Dimensions
SPA-35723	Satin Brass	Cali Tiltable Square Downlight	1 x 35W Max GU10	L:82mm W:82mm H:115mm
SPA-35724	White			
SPA-35725	Matt Black			
SPA-35726	Satin Nickel			
SPA-35727	Chrome			



· Fast-fit connector box

### Key Features

- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in satin nickel, chrome, black chrome, white plus new finishes in matt black & satin brass



## YATE

### Fixed Fire Rated Downlight



Fast-fit Connector Box

Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27465-WHT	White	IP20	1 x 50W Max GU10	Ø72mm	Dia:80mm Proj:115mm H:135mm
ELA-27465-CHR	Chrome				
ELA-27465-BCHR	Black Chrome				
ELA-27465-SCHR	Satin Chrome				
ELA-27465-MBLK	Matt Black <b>NEW</b>				
ELA-27465-SBRS	Satin Brass <b>NEW</b>				



**NEW**  
COLOUR  
OPTIONS



• Fast-fit connector box

### Key Features

- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in satin nickel, chrome, black chrome, white plus new finishes in matt black & satin brass



Class 1



Fire-rated



85mm  
Cut-out

# YATE

## Adjustable Fire Rated Downlight

**FAST  
FIT**

Fast-fit  
Connector Box

Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27466-WHT	White	IP20	1 x 50W Max GU10	Ø85mm	Dia:93mm Proj:120mm H:135mm
ELA-27466-CHR	Chrome				
ELA-27466-BCHR	Black Chrome				
ELA-27466-SCHR	Satin Chrome				
ELA-27466-MBLK	Matt Black <b>NEW</b>				
ELA-27466-SBRS	Satin Brass <b>NEW</b>				



· Fast-fit connector box

### Key Features

- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in satin nickel, chrome, black chrome, white plus new finishes in matt black & satin brass



Class 1



Fire-rated



72mm  
Cut-out

## YATE

### Fire Rated Downlight

**IP65**

For use in  
bathroom  
zone 1

**FAST  
FIT**

Fast-fit  
Connector Box


Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27467-WHT	White	IP65	1 x 50W Max GU10	Ø72mm	Dia:80mm Proj:115mm H:125mm
ELA-27467-CHR	Chrome				
ELA-27467-BCHR	Black Chrome				
ELA-27467-SCHR	Satin Chrome				
ELA-27467-MBLK	Matt Black <b>NEW</b>				
ELA-27467-SBRS	Satin Brass <b>NEW</b>				





### Key Features

- 220-240V
- Chrome finish
- Pull Switch



Class 1 0.55kg

## AQUARIUS

Wall Light

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SPA-PR17146-CHR	Aquarius Wall Light	1 x 28W Max G9	Proj:180mm W:110mm H:220mm



## Key Features

- 220-240V
- Chrome finish
- Pull Switch



Class 1 0.8kg

# ARIES

## 2 Light Wall Light

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SPA-PR12744-CHR	Aries 2 Light Wall Light	2 x 28W Max G9	Proj:115mm W:360mm H:60mm



### Key Features

- 220-240V
- Available in chrome & satin brass
- Pull Switch



Class 1 0.5kg

## CORVUS

### Wall Light

**IP44**

Splashproof  
from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-6888.014-CHR	Chrome	Corvus Wall Light	2 x 25W Max G9	W:205mm H:105mm Proj:155mm
SPA-6888.014-SATBRS	Satin Brass <b>NEW</b>			



**NEW**  
COLOUR  
OPTION



**Key Features**

- 220-240V
- Available in 3 finishes
- Pull Switch



**CHAI**  
Picture/Mirror Light


<b>3000K</b> Warm White	<b>8W LED</b> Integral LED	<b>395 Lumens</b> 70lm/W	<b>IP44</b> Splashproof	<b>3Y</b> 3 Year Guarantee
----------------------------	-------------------------------	-----------------------------	----------------------------	-------------------------------

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30993-CHR	Chrome	Chai Bathroom Picture/Mirror LED Light	8W	3000k	395	70	H:80mm W:410mm Proj:160mm
SPA-30993-SNIC	Satin Nickel						
SPA-30993-SATBRS	Satin Brass <b>NEW</b>						
SPA-30993-MBLK	Matt Black <b>NEW</b>						



### Key Features

- 220-240V
- Integrated shaver socket
- Bathroom zone 2
- Polycarbonate construction
- 20,000 hours lifespan



Class 1 0.6kg



## BARI

### Shaver Light

4000K

Cool White

12W  
LED

Integral LED

1100  
Lumens

91lm/W

IP44

Splashproof



Shave  
Socket

3Y

3 Year  
Guarantee

Code	Description	Lamp	Lumen	Dimensions
SPA-36920-CHR	Bari Shaver Light	12W LED	1100	H:50mm W:490mm Proj:61mm



### Key Features

- 220-240V
- Available in 3 finishes
- Pull Switch



Class 1 2kg

# ARA

## Hollywood 5 Light Wall Light

**IP44**

Splashproof from any angle

Code	Finish	Description	Lamp	Dimensions
SPA-PR13145-CHR	Chrome	Ara 5 Light Wall Light	5 x 28W Max G9	W:680mm H:80mm Proj:110mm
SPA-PR13145-MBLK	Matt Black <b>NEW</b>			
SPA-PR13145-SATBRS	Satin Brass <b>NEW</b>			



### Key Features

- 220-240V
- 2 x magnification
- Pull switch



Class 1



1.26kg

## APUS

### Magnifying Bathroom Mirror

6000K

Daylight  
White

2.24W  
LED

Integral LED

185  
Lumens

29lm/W

IP44

Splashproof

2x

2x  
Magnification

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-HB2803	Chrome	Apus Round Magnifying Mirror	2.24W	6000k	185	82.5	Dia:190mm Proj:390mm





### Key Features

- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Integrated shaver socket
- Can be mounted landscape or portrait



Class 1



6.85kg



Shave point

## ECTI

### Illuminated Bathroom Mirror




Daylight White



Integral LED



29lm/W



Splashproof



Shave Socket




3 Year Guarantee

Code	Description	Lamp	Dimensions
SPA-34035	Ecti Illuminated Bathroom Mirror	12W LED	H:700mm W:500mm Proj:56mm



### Key Features

- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait


  
 Class 1 8.95kg

## FLEC

### Illuminated Bathroom Mirror

<b>5000K</b>	<b>16W</b> <i>LED</i>	<b>763</b> Lumens	<b>IP44</b>		<b>3Y</b>
Daylight White	Integral LED	47lm/W	Splashproof	Demist Pad	3 Year Guarantee

Code	Description	Lamp	Dimensions
SPA-34036	Flec Illuminated Bathroom Mirror	16W LED	H:800mm W:600mm Proj:33mm



### Key Features

- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait




  
 Class 1 6.3kg

## REF

### Illuminated Bathroom Mirror

**5000K**

Daylight White

**18W LED**

Integral LED

**504 Lumens**

18lm/W

**IP44**

Splashproof



Demist Pad

**3Y**

3 Year Guarantee

Code	Description	Lamp	Dimensions
SPA-34037	Ref Illuminated Bathroom Mirror	18W LED	H:700mm W:500mm Proj:46mm



### Key Features


- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait




  
 Class 1 6.7kg

## NOR

### Illuminated Bathroom Mirror

<b>5000K</b>	<b>22W LED</b>	<b>1337 Lumens</b>	<b>IP44</b>		<b>3Y</b>
Daylight White	Integral LED	60lm/W	Splashproof	Demist Pad	3 Year Guarantee

Code	Description	Lamp	Dimensions
SPA-34038	Nor Illuminated Bathroom Mirror	22W LED	H:800mm W:600mm Proj:46mm



### Key Features

- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Can be mounted landscape or portrait



## ION

### Illuminated Bathroom Mirror

<b>5000K</b> Daylight White	<b>8W LED</b> Integral LED	<b>296 Lumens</b> 60lm/W	<b>IP44</b> Splashproof	<b>3Y</b> 3 Year Guarantee
--------------------------------	-------------------------------	-----------------------------	----------------------------	-------------------------------

Code	Description	Lamp	Dimensions
SPA-34039	Ion Illuminated Bathroom Mirror	8W LED	H:500mm W:400mm Proj:46mm





**NEW**




### Key Features

- Mirrored glass
- Bathroom Zone 2
- Motion sensor switch

   
Class 1 6.9kg

## NYX

### Illuminated Bathroom Mirror

<b>5000K</b> Daylight White	<b>12W LED</b> Integral LED	<b>1690 Lumens</b> 140lm/W	<b>IP44</b> Splashproof	 Sensor Switch	<b>3Y</b> 3 Year Guarantee
--------------------------------	--------------------------------	-------------------------------	----------------------------	--	-------------------------------

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35706	Nyx Illuminated Mirror	12W	5000k	1690	140	>80	Dia:600mm Proj:35mm












### Key Features

- Soft close hinged single door
- Door mirrored on both sides
- Adjustable height tempered glass shelves
- Motion sensor ON/OFF switch
- Demist pad & shaver socket



 Class 1 12.4kg

## ARTE

### Illuminated Bathroom Mirror Cabinet

<b>5000K</b> Daylight White	<b>34W LED</b> Integral LED	<b>2190 Lumens</b> 64lm/W	<b>IP44</b> Splashproof	 Sensor Switch	 Demist Pad	 Shave Socket	<b>3Y</b> 3 Year Guarantee
--------------------------------	--------------------------------	------------------------------	----------------------------	--	---	---	-------------------------------



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35707	Arte Illuminated Single Door Mirrored Cabinet	34W	5000k	2190	64	>80	W:500mm H:700mm Proj:130mm





### Key Features

- Soft close hinged double door
- Doors mirrored on both sides
- Adjustable height tempered glass shelves
- Motion sensor ON/OFF switch
- Demist pad & shaver socket



  
 Class 1 15.5kg

## HYM

### Illuminated Bathroom Mirror Cabinet

<b>5000K</b> Daylight White	<b>34W LED</b> Integral LED	<b>2500 Lumens</b> 73.5lm/W	<b>IP44</b> Splashproof	 Sensor Switch	 Demist Pad	 Shave Socket	<b>3Y</b> 3 Year Guarantee
--------------------------------	--------------------------------	--------------------------------	----------------------------	--	---	---	-------------------------------

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35708	Hym Illuminated 2 Door Mirrored Cabinet	34W	5000k	2500	73.5	>80	W:600mm H:800mm Proj:130mm





### Key Features

- Heated seat with five adjustable temperature settings
- Wireless control panel. Remote controlled and easy to operate
- UV LED lighting illuminates the bowl to serve as a night-light
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorization with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Easy installation



- Includes fused spur and fixing kit

# MITO

## Remote Controlled Cleansing Seat

**IP67**

Protected against temporary immersion

Code	Description	Finish	Material	Dimensions
SPA-34864	Remote Controlled Cleansing Seat	White	Plastic	H:190mm W:470mm L:520mm





### Key Features

- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorization with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Easy installation



- Includes fused spur and fixing kit

## MITO Cleansing Seat

**IP67**

Protected against temporary immersion

Code	Description	Finish	Material	Dimensions
SPA-34865	Cleansing Seat	White	Plastic	H:180mm W:435mm L:485mm





Spa<sup>PRO</sup>

## PREMIUM

Spa PRO beautifully designed, premium glass decorative lighting that will bring a touch of glamour to any home.

COLLECTIONS

274-285



### Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

## BRESNA

### 3 Light Flush

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25204-CHR	Bresna 3 Light Flush	3 x 28W Max G9	H:350mm Dia:350mm



### Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

## BRESNA

Small 3 Light Flush

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-31450-CHR	Bresna Small 3 Light Flush	3 x 28W Max G9	H:350mm Dia:280mm



## Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

# BRESNA

## 6 Light Flush

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25201-CHR	Bresna 6 Light Flush	6 x 28W Max G9	H:398mm Dia:500mm



### Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

## BRESNA

### 6 Light Pendant

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25202-CHR	Bresna 6 Light Pendant	6 x 28W Max G9	H:1200mm Dia:500mm



### Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

## BRESNA

Wall Light

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25203-CHR	Bresna Wall Light	2 x 28W Max G9	Proj:175mm W:300mm H:200mm



## Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

# ANNALEE

## Wall Light

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25253-CHR	Annalee Wall Light	2 x 28W Max G9	Proj:156mm W:297mm H:420mm



## Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

# ANNALEE

## 3 Light Chandelier

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-31449-CHR	Annalee 3 Light Chandelier	3 x 28W Max G9	H:1520mm Dia:450mm





## Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

# ANNALEE

## Small 5 Light Chandelier

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25256-CHR	Annalee 5 Light Chandelier	5 x 28W Max G9	H:1000mm Dia:385mm



## Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

# ANNALEE

## 5 Light Chandelier

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25254-CHR	Annalee 5 Light Chandelier	5 x 28W Max G9	H:1580mm Dia:500mm



## Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

# ANNALEE

## 8 Light Chandelier

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25255-CHR	Annalee 8 Light Chandelier	8 x 28W Max C9	H:1650mm Dia:400mm



## Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

# NORE

Large Encased Flush

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25210-CHR	Nore Large Encased Flush	8 x 28W Max G9	H:320mm Dia:500mm



### Key Features

- 220-240V
- Chrome finish
- Clear crystal droplets



Class 1

## NORE

### Small Encased Flush

**IP44**

Splashproof  
from any angle

Code	Description	Lamp	Dimensions
SP-25211-CHR	Nore Small Encased Flush	5 x 28W Max G9	H:300mm Dia:400mm



## KITCHEN

A range of modern LED kitchen lighting, including tape, under cabinet lights, link lights and plinth lights.

<b>UNDER CABINET</b>	<b>288-295</b>
<b>LINK LIGHTS</b>	<b>296-298</b>
<b>TRACK LIGHTING</b>	<b>299-305</b>
<b>LED BATTENS</b>	<b>306-308</b>
<b>PLINTH</b>	<b>309-311</b>

**NO  
DRIVER  
REQ.**



CUL-25317

### Key Features

- 220-240V
- Brushed satin nickel body with polycarbonate diffuser
- Available in 3000/4000/6000K
- No driver required



Class 2



0.1kg



50mm  
Cut-out

## POZZA

### Under Cabinet Lighting

**1.5W  
LED**

Integral LED

**Up to  
150  
Lumens**

Up to  
150lm

**3Y**

3 Year  
Guarantee

Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25317	Pozza Under Cabinet Light	1.5W LED	3000	130	Dia:65mm Proj:20mm
CUL-21624	Pozza Under Cabinet Light	1.5W LED	4000	140	Dia:65mm Proj:20mm
CUL-25217	Pozza Under Cabinet Light	1.5W LED	6000	150	Dia:65mm Proj:20mm




NO  
DRIVER  
REQ.



CUL-25318

### Key Features

- 220-240V
- Brushed satin nickel body with polycarbonate diffuser
- Available in 3000/4000/6000K
- No driver required



Class 2 0.14kg

## LAGHETTO

Under Cabinet Lighting

1.5W  
LED

Integral LED

Up to  
150  
Lumens

Up to  
150lm

3Y

3 Year  
Guarantee

Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25318	Laghetto Under Cabinet Light	1.5W LED	3000	130	Dia:75mm Proj:26mm
CUL-21625	Laghetto Under Cabinet Light	1.5W LED	4000	140	Dia:75mm Proj:26mm
CUL-25218	Laghetto Under Cabinet Light	1.5W LED	6000	150	Dia:75mm Proj:26mm


**NO  
DRIVER  
REQ.**



CUL-25319

### Key Features

- 220-240V
- Brushed satin nickel body with polycarbonate diffuser
- Available in 3000/4000/6000K
- No driver required



Class 2 0.16kg

## FORTE

### Under Cabinet Lighting



Integral LED



Up to 150lm



3 Year Guarantee

Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25319	Fonte Under Cabinet Light	1.5W LED	3000	130	H:126mm W:145mm Proj:32mm
CUL-21626	Fonte Under Cabinet Light	1.5W LED	4000	140	H:126mm W:145mm Proj:32mm
CUL-25219	Fonte Under Cabinet Light	1.5W LED	6000	150	H:126mm W:145mm Proj:32mm


**NO  
DRIVER  
REQ.**



CUL-25320

### Key Features

- 220-240V
- Brushed satin nickel body with polycarbonate diffuser
- Available in 3000/4000/6000K
- No driver required



Class 2 0.19kg

## LAGO

### Under Cabinet Lighting



Integral LED



Up to 150lm



3 Year Guarantee

Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25320	Lago Under Cabinet Light	1.5W LED	3000	130	H:142mm W:80mm Proj:32mm
CUL-21627	Lago Under Cabinet Light	1.5W LED	4000	140	H:142mm W:80mm Proj:32mm
CUL-25220	Lago Under Cabinet Light	1.5W LED	6000	150	H:142mm W:80mm Proj:32mm

NEW

NO  
DRIVER  
REQ.



### Key Features

- Mains connected - no driver required
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1m cable included



Class 2

## ELLEN

LED Round Under Cabinet Light



Switch between  
3000K, 4000K  
& 6000K



Integral LED



80lm/W



3 Year  
Guarantee

Code	Description	Lamp	Lumen	Dimensions
CUL-35860	Ellen Round LED CCT Under Cabinet Light	1.5W LED	120	Dia:75mm Proj:29mm

NEW

NO  
DRIVER  
REQ.



### Key Features

- Mains connected - no driver required
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1m cable included



Class 2

## FARO

LED Round Under Cabinet Light



Switch between  
3000K, 4000K  
& 6000K



Integral LED



80lm/W



3 Year  
Guarantee

Code	Description	Lamp	Lumen	Dimensions
CUL-35861	Faro Triangle LED CCT Under Cabinet Light	1.5W LED	120	H:122mm W:142mm Proj:36mm

NEW

NO  
DRIVER  
REQ.



## Key Features

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1m cable included



Class 2

# ARGI

LED Round Under Cabinet Light



Switch between  
3000K, 4000K  
& 6000K



Integral LED



60lm/W



3 Year  
Guarantee

Code	Description	Lamp	Lumen	Dimensions
CUL-35864	Argi Round LED CCT Under Cabinet Light	3W LED	180	Dia:75mm Proj:29mm

NEW

NO  
DRIVER  
REQ.



## Key Features

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1m cable included



Class 2

# AYLA

## LED Triangle Under Cabinet Light



Switch between  
3000K, 4000K  
& 6000K



Integral LED



60lm/W



3 Year  
Guarantee

Code	Description	Lamp	Lumen	Dimensions
CUL-35865	Ayla Triangle LED CCT Under Cabinet Light	3W LED	180	H:122mm W:142mm Proj:36mm



### Key Features

- 220-240V
- Silver aluminium body with opal polycarbonate diffuser
- Available in 3000/4000K
- ON/OFF rocker switch
- No driver required
- Supplied with 2m power lead
- Simple connection system



Class 2




Simple to butt connect fittings together

## LEGARE

### Under Cabinet Link Light



Integral LED



2 Meter Power Cable



3 Year Guarantee

Code	Description	Power (w)	Kelvin	Lumen	Weight	Length	Dimensions
CUL-25321	Legare Under Cabinet Link Light	4W LED	3000	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-25322		7W LED	3000	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-25323		12W LED	3000	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-25324		14W LED	3000	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm
CUL-21661		4W LED	4000	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-21662		7W LED	4000	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-21663		12W LED	4000	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-21664		14W LED	4000	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm





### Key Features

- 220-240V
- Silver aluminium body with opal polycarbonate diffuser
- Switch between 3000K/OFF/4000K
- No driver required
- Supplied with 2m power lead
- Simple connection system



Class 2



• Simple to butt connect fittings together

## LEGARE

### Under Cabinet Link Light



Switch between 3000K & 4000K



Integral LED



2 Meter Power Cable



3 Year Guarantee

Code	Description	Lamp	Lumen	Weight	Length	Dimensions
CUL-34223-CCT	Legare CCT Link Light	4W LED	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-34224-CCT	Legare CCT Link Light	7W LED	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-34225-CCT	Legare CCT Link Light	12W LED	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-34226-CCT	Legare CCT Link Light	14W LED	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm

# LINK LEAD



Code	Description	Dimensions
CUL-21665	Legare 50cm Link Lead	L:500mm
CUL-21666	Legare 100cm Link Lead	L:1000mm



### Key Features

- 220-240V
- Die-cast Aluminium and ABS construction
- Includes 1 x live end & 1 x dead end



Class 2

## TOR


### Single Circuit Track

Code	Description	Colour	Length	Dimensions
CUL-21637-WHT	Tor Single Circuit Track	White	1000mm	L:1000mm W:37mm Proj:17mm
CUL-21638-WHT	Tor Single Circuit Track	White	1500mm	L:1500mm W:37mm Proj:17mm
CUL-21639-WHT	Tor Single Circuit Track	White	2000mm	L:2000mm W:37mm Proj:17mm
CUL-26333-BLK	Tor Single Circuit Track	Black	1000mm	L:1000mm W:37mm Proj:17mm
CUL-26334-BLK	Tor Single Circuit Track	Black	1500mm	L:1500mm W:37mm Proj:17mm
CUL-26335-BLK	Tor Single Circuit Track	Black	2000mm	L:2000mm W:37mm Proj:17mm



### Key Features

- 220-240V
- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction



Class 2 0.13kg

## LUCIDO


### Track Light

Code	Description	Colour	Lamp	Dimensions
CUL-21658-WHT	Lucido Track Light	White	1 x 35W Max GU10	H:135mm Proj:75mm
CUL-26345-BLK	Lucido Track Light	Black	1 x 35W Max GU10	H:135mm Proj:75mm



### Key Features

- 220-240V
- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction



Class 2 0.29kg

## RIBALTA


### Track Light

Code	Description	Colour	Lamp	Dimensions
CUL-21656-WHT	Ribalta Track Light	White	1 x 35W Max GU10	H:200mm Proj:78mm
CUL-26344-BLK	Ribalta Track Light	Black	1 x 35W Max GU10	H:200mm Proj:78mm



### Key Features

- 220-240V
- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction



Class 2 0.16kg

# LUSTRO

## Track Light

Code	Description	Colour	Lamp	Dimensions
CUL-21660-WHT	Lustro Track Light	White	1 x 35W Max GU10	H:103mm Proj:89mm
CUL-26346-BLK	Lustro Track Light	Black	1 x 35W Max GU10	H:103mm Proj:89mm



### Key Features

- 220-240V
- For use with Tor Single Circuit Track
- Compatible with most LED dimmers



Class 2 Dimmable



## LECCO

### Track Light

4000K

Cool White

8W  
LED

Integral LED

640  
Lumens

80lm/W

3Y

3 Year  
Guarantee

Code	Description	Colour	Lamp	Dimensions
CUL-33997-WHT	Lecco LED Track Light	White	8W LED	H:185mm Proj:114mm
CUL-33997-BLK	Lecco LED Track Light	Black	8W LED	H:185mm Proj:114mm



### Key Features

- 220-240V
- For use with Tor Single Circuit Track
- Compatible with most LED dimmers



Class 2 Dimmable

## LIVORNO

### Track Light

4000K

Cool White

10W  
LED

Integral LED

800  
Lumens

80lm/W

3Y

3 Year  
Guarantee

Code	Description	Colour	Lamp	Dimensions
CUL-33998-WHT	Livorno LED Track Light	White	10W LED	H:142mm Proj:113mm
CUL-33998-BLK	Livorno LED Track Light	Black	10W LED	H:142mm Proj:113mm



# TRACK ACCESSORIES



PENDANT  
ADAPTER  
FITS FLUSH  
IN TRACK

White	Black	Description	Dimensions
CUL-26342	CUL-26341	Flexible Connector	L:296mm W:35mm Proj:17mm
CUL-21645	CUL-26337	Double Live End Connector	L:184mm W:35mm Proj:17mm
CUL-33996	CUL-33996	Track Pendant Adapter	L:81mm W:34mm Proj:46mm
CUL-21651	CUL-26339	T Live End Connector	L:109mm W:183mm Proj:17mm
CUL-21649	CUL-26340	X Live End Connector	L:183mm W:183mm Proj:17mm
CUL-21647	CUL-26338	L Live End Connector	L:109mm W:109mm Proj:17mm
CUL-21643	CUL-26336	Butt Connector	L:79mm W:35mm Proj:17mm



### Key Features

- 220-240V
- Aluminium body with polycarbonate diffuser
- No driver required
- Choice of 3000K, 4000K and 6000K in the 1500/1800mm lengths
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available



• 7mm clip



• 20mm clip



Class 2

## RENO LED Batten



Integral LED



Up to 3600lm



3 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30698	Reno LED Batten	20W LED	3000	1800	600mm	L:600mm W:75mm Proj:24mm
CUL-30700		30W LED	3000	2690	900mm	L:900mm W:75mm Proj:24mm
CUL-30702		40W LED	3000	3600	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30699		20W LED	4000	1850	600mm	L:600mm W:75mm Proj:24mm
CUL-30701		30W LED	4000	2730	900mm	L:900mm W:75mm Proj:24mm
CUL-30703		40W LED	4000	3650	1200mm	L:1200mm W:75mm Proj:24mm



### Key Features

- 220-240V
- Aluminium body with polycarbonate diffuser
- No driver required
- Choice of 3000K, 4000K and 6000K in the 1500/1800mm lengths
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available



• 7mm clip



• 20mm clip



Class 2

## RENO LED Batten



Integral LED



Up to 6000lm



3 Year Guarantee

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30704	Reno LED Batten	60W LED	3000	5200	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30707		80W LED	3000	6600	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30705		60W LED	4000	5300	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30708		80W LED	4000	6700	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30706		60W LED	6000	5500	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30709		80W LED	6000	6900	1800mm	L:1800mm W:75mm Proj:24mm

# SUSPENSION KIT



Code

Description

Dimensions

CUL-30710

Reno 1m Suspension Kit

L:1000mm

CUL-30711

Reno 2m Suspension Kit

L:2000mm



## Key Features

- 220-240V
- IP65 Head / IP20 Adaptor
- 20,000 hours lifespan



Class 3

# OHIO

## 30mm Plinth/Decking 10 Light Kit

**6000K**

Daylight  
White

**LED**

Integral LED

**20**  
Lumens

20 lumens  
per head

**IP65**

Ideal for use  
outdoors

**3Y**

3 Year  
Guarantee

Code	Description	Lamp	Weight	Dimensions
CUL-27858-SST	Ohio Plinth/Decking 10 Light Kit	10 x 0.162W Integral LED	0.5kg	Dia:30mm L:4000mm




**NO  
DRIVER  
REQ.**



CUL-26466-CW

### Key Features

- 220-240V
- Available in warm white or cool white
- Brushed steel finish
- 20,000 hours lifespan
- No driver required



Class 2 35mm 0.125kg  
Cut-out



CUL-26466-WW

## OHIO

### Circular Decking/Plinth Light

IP65

LED

2m

3Y

Protected against water jets    Integral LED    2 Meter Cable    3 Year Guarantee

Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-26465-WW	Ohio Circular 240V Decking Light	0.5W LED	3000	20	Dia:40mm
CUL-26465-CW	Ohio Circular 240V Decking Light	0.5W LED	6000	20	Dia:40mm





## INDOOR

Indoor lighting including a comprehensive range of decorative cable sets, shades and our new Illuminate task lighting. LED Lamps with attractive design and energy saving performance, INLIGHT LED lamps superbly compliment the Forum Lighting range.

<b>SPOTLIGHTS</b>	<b>314-323</b>
<b>PICTURE LIGHT</b>	<b>324-325</b>
<b>TASK LIGHTING</b>	<b>326-327</b>
<b>CABLE SETS</b>	<b>328-333</b>
<b>SHADES</b>	<b>334-337</b>
<b>LED LAMPS</b>	<b>338-347</b>



### Key Features

- 220-240V
- Satin nickel and chrome finish
- Contemporary styling
- ON/OFF toggle switch



Class 1



0.4kg

## ELARA


Wall Spotlight

Code	Description	Lamp	Dimensions
INL-740000-SNIC	Elara Wall Spotlight	1 x 35W Max GU10	L:110mm W:100mm H:115mm



### Key Features

- 220-240V
- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps



Class 1 1.18kg

## ELARA


### 4 Light Bar Spotlight

Code	Description	Lamp	Dimensions
INL-598410-SNIC	Elara 4 Light Bar Spotlight	4 x 35W Max GU10	L:800mm W:165mm H:145mm



### Key Features

- 220-240V
- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps



Class 1 1.33kg

## ELARA

### 3 Light Plate Spotlight

Code	Description	Lamp	Dimensions
INL-598310-SNIC	Elara 3 Light Plate Spotlight	3 x 35W Max GU10	H:115mm Dia:290mm

INL-28203-BCHR



### Key Features

- 220-240V
- Black Chrome finish
- Contemporary styling
- Adjustable lamps



Class 1



INL-28201-BCHR



INL-28202-BCHR

## PEDRO

Round Plate Spotlight

Code	Description	Lamp	Weight	Dimensions
INL-28201-BCHR	Pedro Wall/Ceiling Spotlight	1 x 35W Max GU10	0.5kg	H:120mm Dia:100mm
INL-28202-BCHR	Pedro 2 Light Plate Spotlight	2 x 35W Max GU10	1.1kg	H:120mm Dia:190mm
INL-28203-BCHR	Pedro 3 Light Plate Spotlight	3 x 35W Max GU10	1.2kg	H:120mm Dia:260mm



### Key Features

- 220-240V
- Black Chrome finish
- Contemporary styling
- Adjustable lamps



Class 1



1.65kg

## PEDRO

### Square Plate Spotlight

Code	Description	Lamp	Dimensions
INL-28205-BCHR	Pedro 4 Light Plate Spotlight	4 x 35W Max GU10	W:220mm L:220mm H:120mm

INL-31790-BCHR



### Key Features

- 220-240V
- Black Chrome finish
- Contemporary styling
- Adjustable lamps



Class 1



INL-28204-BCHR


## PEDRO

Bar Spotlight

Code	Description	Lamp	Weight	Dimensions
INL-28204-BCHR	Pedro 4 Light Bar Spotlight	4 x 35W Max GU10	1.9kg	L:100mm W:640mm H:120mm
INL-31790-BCHR	Pedro 6 Light Bar Spotlight	6 x 35W Max GU10	2.92kg	L:100mm W:900mm H:120mm






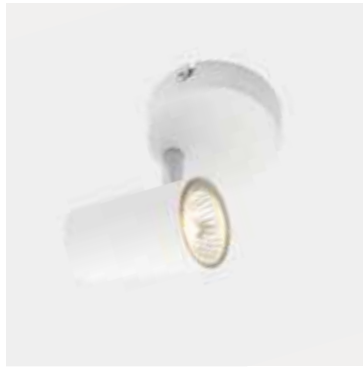

### Key Features

- 220-240V
- Contemporary styling
- Ceiling or wall mounted
- 350° rotation



Class 1 0.19kg


## HARVEY Spotlight

Code	Finish	Description	Lamp	Dimensions
INL-31775-SNIC	Satin Nickel	Harvey Spotlight	1 x 35W Max GU10	L:100mm W:85mm H:120mm
INL-31775-BLK	Black			
INL-31775-WHT	White			
INL-31775-SATBRS	Satin Brass <b>NEW</b>			



### Key Features

- 220-240V
- Contemporary styling
- Adjustable lamps
- 350° rotation



Class 1 0.62kg

## HARVEY


### 3 Light Spotlight

Code	Finish	Description	Lamp	Dimensions
INL-31776-SNIC	Satin Nickel	Harvey 3 Light Spotlight	3 x 35W Max GU10	Dia:215mm H:120mm
INL-31776-BLK	Black			
INL-31776-WHT	White			
INL-31776-SATBRS	Satin Brass <b>NEW</b>			



### Key Features

- 220-240V
- Contemporary styling
- Adjustable lamps
- 350° rotation



Class 1 0.75kg


## HARVEY

### 4 Light Bar Spotlight

Code	Finish	Description	Lamp	Dimensions
INL-31723-SNIC	Satin Nickel	Harvey 4 Light Bar Spotlight	4 x 35W Max GU10	L:774mm W:85mm H:120mm
INL-31723-BLK	Black			
INL-31723-WHT	White			
INL-31723-SATBRS	Satin Brass <b>NEW</b>			



**NEW**  
COLOUR  
OPTION

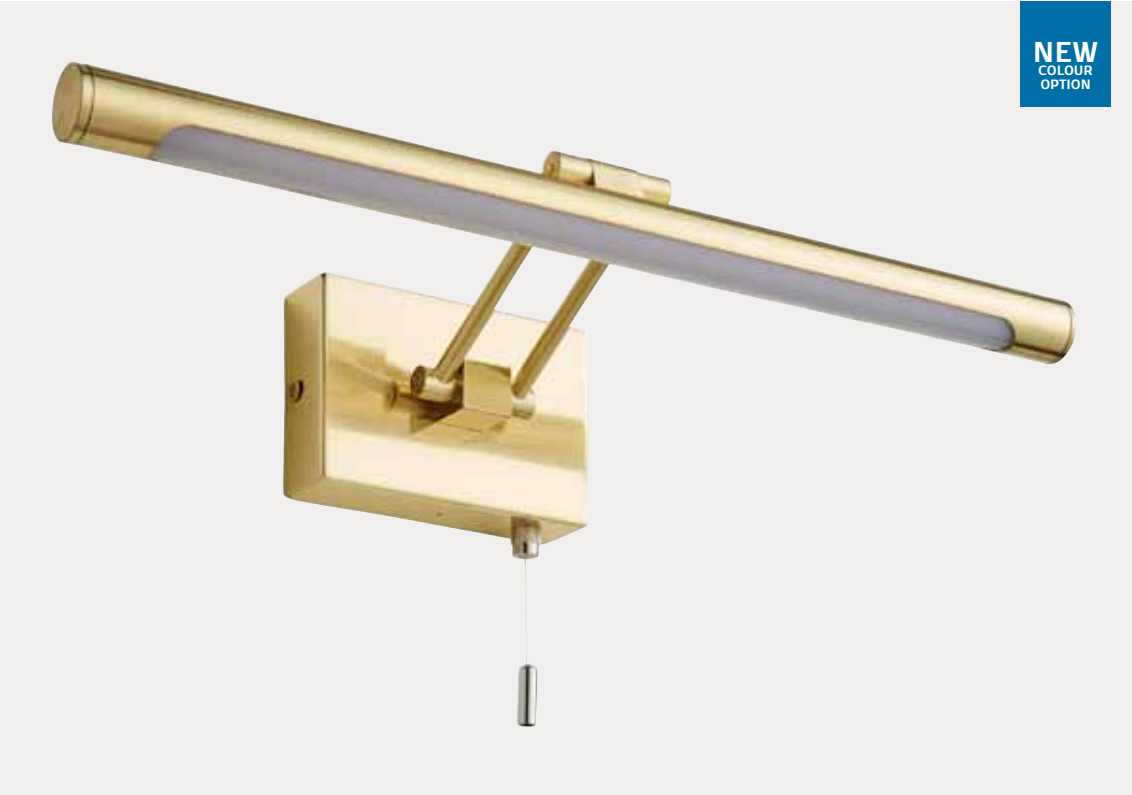

**Key Features**

- 220-240V
- Available in 4 finishes
- Pull Switch



**CHAI**  
Picture/Mirror Light


<b>3000K</b> Warm White	<b>8W LED</b> Integral LED	<b>395 Lumens</b> 70lm/W	<b>IP44</b> Splashproof	<b>3Y</b> 3 Year Guarantee
----------------------------	-------------------------------	-----------------------------	----------------------------	-------------------------------

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30993-CHR	Chrome	Chai Bathroom Picture/Mirror LED Light	8W	3000k	395	70	H:80mm W:410mm Proj:160mm
SPA-30993-SNIC	Satin Nickel						
SPA-30993-SATBRS	Satin Brass <b>NEW</b>						
SPA-30993-MBLK	Matt Black <b>NEW</b>						



### Key Features

- 220-240V ~ 50Hz
- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available



Class 2 2.46kg

## BUDA

### LED Task Lamp

6000K

Daylight  
White

8W  
LED

Integral LED

610  
Lumens

76lm/W



3x  
Magnification

1.5m



1.5 Meter  
Cable

Code	Description	Lamp	Finish	Dimensions
ILL-34557-WHT	Buda LED Task Lamp	8W LED	Matt White	L:400mm W:210mm H:1000mm



### Key Features

- 220-240V ~ 50Hz
- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available


  
 Class 2 2.52kg

## BUDA

### Task Lamp

			
3x Magnification	T4 Circular Fluorescent Tube	50lm/W	1.5 Meter Cable

Code	Description	Lamp	Finish	Dimensions
ILL-34556-WHT	Buda Task Lamp	22W T4 Fluorescent	Matt White	L:415mm W:200mm H:1000mm

# FLOOR STAND



- Fits ILL-34557-WHT & ILL-34556-WHT task lamps
- Task lamp simply slots into stand



**Code**

**Description**

**Colour**

**Weight**

**Dimensions**

ILL-34558-WHT

Round Floor Stand

White

8.85kg

H:697mm Dia:387mm




# CABLE SETS



## Key Features

- 220-240V
- Vintage styling
- Adjustable 1m max cable length
- Lamps supplied separately



Class 1 0.23kg

Code	Description	Finish	Lamp	Dimensions
INL-23519-BLK	Cable Set	Black Nickel with Black Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-GRY	Cable Set	Black Nickel with Grey Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-RED	Cable Set	Polished Nickel with Red Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-HERR	Cable Set	Polished Nickel with Herringbone cable	1 x 42W Max E27	Dia:118mm H:1100mm




# CABLE SETS



## Key Features

- 220-240V
- Can be fitted to almost any easyfit shade
- Vintage styling
- Adjustable 1m max cable length
- Lamps supplied separately



Class 1 0.28kg


Code	Description	Lamp	Dimensions
INL-27988-ABRS	Antique Brass Cable Set with Champagne Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-ACOP	Antique Copper Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-PEW	Pewter Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-BRZ	Bronze Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-SNIC	Satin Nickel Cable Set with Grey Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm





### Key Features

- 220-240V
- Supplied with hook and loop fixing kit to create your own style
- Height adjustable



Class 1 1.81kg

## PADUA

### 7 Light Ceiling Fitting

Code	Description	Lamp	Dimensions
INL-31789-ACOP	Padua 7 Light Ceiling Fitting	7 x 42W Max E27 GLS	H:300-2000mm Dia:600mm



# DINER SHADES

INL-33818-ACOP



## Key Features

- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

INL-33819-ABRS



## Key Features

- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

Description	Colour	Small	Dimensions	Large	Dimensions
Rigel Diner Shade	Antique Brass	INL-33818-ABRS	H:67mm Dia:236mm	INL-33819-ABRS	H:67mm Dia:360mm
Rigel Diner Shade	Matt Black	INL-33818-MBLK	H:67mm Dia:236mm	INL-33819-MBLK	H:67mm Dia:360mm
Rigel Diner Shade	Polished Nickel	INL-33818-PNIC	H:67mm Dia:236mm	INL-33819-PNIC	H:67mm Dia:360mm
Rigel Diner Shade	Antique Copper	INL-33818-ACOP	H:67mm Dia:236mm	INL-33819-ACOP	H:67mm Dia:360mm
Rigel Diner Shade	Matt Grey	INL-33818-MGRY	H:67mm Dia:236mm	INL-33819-MGRY	H:67mm Dia:360mm





# DECORATIVE SHADES



INL-33136-SMK



INL-33137-CHAMP



INL-33140-ACOP



INL-33139-MBLK

## Key Features

- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

Code	Description	Colour	Dimensions
INL-33136-SMK	Agol Coolie Glass Easyfit Shade	Smoke	Dia:250mm H:125mm
INL-33137-CHAMP	Agol Sphere Glass Easyfit Shade	Champagne	Dia:243mm H:225mm
INL-33139-MBLK	Castor Onion Wire Easyfit Shade	Matt Black	Dia:240mm H:230mm
INL-33140-ACOP	Castor Diamond Wire Easyfit Shade	Antique Copper	Dia:263mm H:210mm




# LARGE VINTAGE


## LED Lamps




INL-34028-AMB




INL-34029-AMB



INL-34030-AMB



INL-34031-AMB




· 360° Beam angle

Code	Description	Kelvin	Lumen	Dimensions
INL-34028-AMB	G180 6W LED E27 Filament Lamp	2000	450	Dia:180mm H:230mm
INL-34029-AMB	A165 6W LED E27 Filament Lamp	2000	450	Dia:165mm H:300mm
INL-34030-AMB	BT180 6W LED E27 Filament Lamp	2000	450	Dia:180mm H:360mm
INL-34031-AMB	T80 6W LED E27 Filament Lamp	2000	450	Dia:80mm H:330mm


# VINTAGE

## LED Lamps





**580**  
 LUMEN
 **DIMMABLE**













**650**  
 LUMEN
 **DIMMABLE**




**450**  
 LUMEN
 **DIMMABLE**





**400**  
 LUMEN
 **DIMMABLE**

Code	Description	Colour	Kelvin	Lumen	Dimensions
INL-ST64-LED-ES-TNT	ST64 6W E27 LED Filament Lamp 	Tinted	2000	580	Dia:64mm H:140mm
INL-ST64-LED-BC-TNT	ST64 6W B22 LED Filament Lamp 	Tinted	2000	580	Dia:64mm H:140mm
INL-ST64-LED-ES-CLR	ST64 6W E27 LED Filament Lamp 	Clear	2000	650	Dia:64mm H:140mm
INL-ST64-LED-BC-CLR	ST64 6W B22 LED Filament Lamp 	Clear	2000	650	Dia:64mm H:140mm
INL-G80-LED-ES-TNT	G80 4W E27 LED Filament Lamp 	Tinted	2000	400	Dia:80mm H:120mm
INL-G80-LED-BC-TNT	G80 4W B22 LED Filament Lamp 	Tinted	2000	400	Dia:80mm H:120mm
INL-G80-LED-ES-CLR	G80 4W E27 LED Filament Lamp 	Clear	2000	450	Dia:80mm H:120mm
INL-G80-LED-BC-CLR	G80 4W B22 LED Filament Lamp 	Clear	2000	450	Dia:80mm H:120mm


# VINTAGE

## LED Lamps





**580**  
 LUMEN
 **DIMMABLE**










**650**  
 LUMEN
 **DIMMABLE**




**165**  
 LUMEN
 **DIMMABLE**




**180**  
 LUMEN
 **DIMMABLE**

Code	Description	Colour	Kelvin	Lumen	Dimensions
INL-G95-LED-ES-TNT	G95 6W E27 LED Filament Lamp 	Tinted	2000	580	Dia:95mm H:140mm
INL-G95-LED-BC-TNT	G95 6W B22 LED Filament Lamp 	Tinted	2000	580	Dia:95mm H:140mm
INL-G95-LED-ES-CLR	G95 6W E27 LED Filament Lamp 	Clear	2000	650	Dia:95mm H:140mm
INL-G95-LED-BC-CLR	G95 6W B22 LED Filament Lamp 	Clear	2000	650	Dia:95mm H:140mm
INL-C35L-LED-SES-TNT	C35L 2W E14 LED Filament Lamp 	Tinted	2000	165	Dia:35mm H:120mm
INL-C35L-LED-SES-CLR	C35L 2W E14 LED Filament Lamp 	Clear	2000	180	Dia:35mm H:120mm

# CEILING ROSE

NEW



## Key Features

- Fits E27 lamps
- Perfect replacement for standard ceiling rose pendants

Code	Finish	Description	Dimensions
INL-34942-SNIC	Satin Nickel	Batten Ceiling Rose Straight	Dia:XXXmm H:XXXmm
INL-34942-ABRS	Antique Brass		
INL-34942-ACOP	Antique Copper		


# FILAMENT

LED Lamps

**NEW**











**600 LUMEN**  
 DIMMABLE


**600 LUMEN**  
 DIMMABLE










**400 LUMEN**  
 DIMMABLE


**400 LUMEN**  
 DIMMABLE

Code	Bulb Shape	Cap Type	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Beam Angle	Energy Rating	Dimensions
INL-36014	GLS (Classic)	B22	6W	3000k	600	100lm/W	360°		Dia:60mm H:108mm
INL-36013	GLS (Classic)	E27	6W	Warm White	600				Dia:60mm H:108mm
INL-36012	Candle	E14	4W		400				Dia:35mm H:100mm
INL-36017	GLS (Classic)	B22	6W	4000k	600				Dia:60mm H:108mm
INL-36016	GLS (Classic)	E27	6W	Cool White	600				Dia:60mm H:108mm
INL-36015	Candle	E14	4W		400				Dia:35mm H:100mm

# G9

## LED Lamps

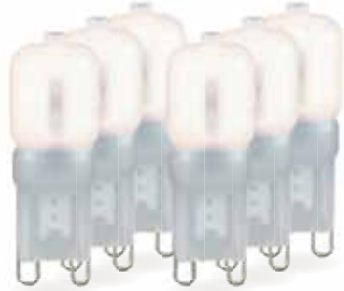

Code	Description		Pack Size	Kelvin	Lumen	Dimensions
INL-28573	2.5W G9 LED Lamp		Single	3000	180	W:16mm H:48mm
INL-28575	2.5W G9 LED Lamp		3 Pack	3000	180	W:16mm H:48mm
INL-28577	2.5W G9 LED Lamp		6 Pack	3000	180	W:16mm H:48mm
INL-28574	2.5W G9 LED Lamp		Single	4000	180	W:16mm H:48mm
INL-28576	2.5W G9 LED Lamp		3 Pack	4000	180	W:16mm H:48mm
INL-28578	2.5W G9 LED Lamp		6 Pack	4000	180	W:16mm H:48mm



# GU10

## LED Lamps



400  
LUMEN

320°  
BEAM  
ANGLE



400  
LUMEN

320°  
BEAM  
ANGLE

Code	Description	Hours	Kelvin	Lumen	Dimmable	Dimensions
INL-34150-3K	5W LED GU10 LED Lamp	30000	3000	400	-	Dia:50mm H:53mm
INL-34151-3K	5W LED GU10 LED Lamp	30000	3000	400	Yes	Dia:50mm H:53mm
INL-34150-4K	5W LED GU10 LED Lamp	30000	4000	400	-	Dia:50mm H:53mm
INL-34151-4K	5W LED GU10 LED Lamp	30000	4000	400	Yes	Dia:50mm H:53mm

# DUSK TILL DAWN

LED Lamps



DUSK  
TILL  
DAWN

800  
LUMEN



DUSK  
TILL  
DAWN


800  
LUMEN

Code	Description		Hours	Kelvin	Lumen	Dimensions
INL-29464-WW	9W LED E27 D2D LED Lamp	A <sup>+</sup>	40000	2700	800	Dia:60mm H:115mm
INL-29464-CW	9W LED E27 D2D LED Lamp	A <sup>+</sup>	40000	4000	800	Dia:60mm H:115mm
INL-29465-WW	9W LED B22 D2D LED Lamp	A <sup>+</sup>	40000	2700	800	Dia:60mm H:115mm
INL-29465-CW	9W LED B22 D2D LED Lamp	A <sup>+</sup>	40000	4000	800	Dia:60mm H:115mm

# CCT


## LED Lamps





**1050**  
LUMEN
 **200°**  
BEAM  
ANGLE



**NEW**






**1050**  
LUMEN
 **200°**  
BEAM  
ANGLE




**500**  
LUMEN
 **120°**  
BEAM  
ANGLE

### Key Features

- 3 colour choices
- Not dimmable
- Switch between 3000K warm white, 4000K natural white and 6000K cool white

Code	Description	Hours	Kelvin	Lumen	Dimensions
INL-34400-CCT	6W LED GU10 LED Lamp 	25000	CCT	500	Dia:50mm H:53mm
INL-34401-CCT	12W LED E27 GLS LED Lamp 	25000	CCT	1050	Dia:60mm H:111mm
INL-35728-CCT 	12W LED B22 GLS LED Lamp 	25000	CCT	1050	Dia:60mm H:111mm



**STANLEY**

# WORKSITE

A professional range of robust, high output and long lasting LED site lighting.

PORTABLE

350-367

FESTOON

368-371



STANLEY



### Key Features

- Tripod mountable
- Durable polycarbonate body
- Heavy duty shockproof base
- 360° beam angle for shadow free illumination
- 5m H05RN-F 3G 1.5mm cable
- Available in 240V & 110V versions



Class 1



3.6kg

## AREA Work Light

**6000K**

Daylight  
White

**120W  
LED**

Integral LED

**8400  
Lumens**

70lm/W

**IP54**

Splashproof  
from any angle

**IK10**

Impact  
protection

**2Y**

2 Year  
Guarantee

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31324E	Area Work Light	220-240V	120W LED	8400	L:349mm W:347mm H:436mm
SXLS31324ES	Area Work Light	110V	120W LED	8400	L:349mm W:347mm H:436mm








### Key Features

- Durable ABS / PC body
- Heavy duty rubber surround
- Folding carry handle acts as a stand and wall mountable fixture
- 5m H05RN-F 3C 1.5mm cable
- 1 x external socket outlet



Class 2 2.24kg

## WALL / PORTABLE Work Light

**6000K**

Daylight  
White

**35W  
LED**

Integral LED

**2100  
Lumens**

70lm/W

**IP44**

Splashproof  
from any angle

**2Y**

2 Year  
Guarantee



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31326E	Portable Work Light	220-240V	35W LED	2100	L:120mm W:270mm H:275mm





### Key Features

- Durable ABS / PC body with steel legs
- Foldable stand and carry strap
- 5m H05RN-F 3C 1.5mm cable
- 1 x external socket outlet
- Available in 110V & 240V versions



Class 1 3.24kg

# PLASTERERS LIGHT

Work Light

**6000K**

Daylight  
White

**40W  
LED**

Integral LED

**3200  
Lumens**

70lm/W

**IP44**

Splashproof  
from any angle

**2Y**


2 Year  
Guarantee

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31322E	Plasterers Work Light	220-240V	40W LED	3200	L:870mm W:1000mm H:1645mm
SXLS31322ES	Plasterers Work Light	110V	40W LED	3200	L:870mm W:1000mm H:1645mm



### Key Features

- Durable ABS / PC body
- Heavy duty shockproof base with moulded carry handle
- IK10 impact resistant for tough working environments
- 2 x external socket outlets
- 5m H05RN-F 3G 1.5mm cable
- 20,000 hours lifetime
- Available in 240V & 110V versions



Class 1 2.96kg

## PANEL

### Work Light

6000K

Daylight  
White

50W  
LED

Integral LED

4000  
Lumens

80lm/W

IP44

Splashproof  
from any angle

IK10

Impact  
protection

2Y


2 Year  
Guarantee

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31325E	Panel Work Light	220-240V	120W LED	4000	L:150mm W:300mm H:465mm
SXLS31325ES	Panel Work Light	110V	120W LED	4000	L:150mm W:300mm H:465mm



## Key Features

- Durable die-cast aluminium body
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3C 1.5mm cable
- 20,000 hours lifetime



Class 2 1.9kg

- Fits tripod SXLS31333E

# WORK LIGHT

6000K

Daylight  
White

33W  
LED

Integral LED

4000  
Lumens

80lm/W

IP65

Ideal for use  
outdoors

2Y

2 Year  
Guarantee


Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31331E	Work Light	220-240V	33W LED	4000	L:183mm W:215mm H:330mm





### Key Features

- Durable die-cast aluminium body
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3C 1.5mm cable
- 20,000 hours lifetime



• Fits tripod SXLS31333E

## TWIN WORK LIGHT

**6000K**

Daylight White

**66W**  
**LED**

Integral LED

**8000**  
**Lumens**

80lm/W

**IP65**

Ideal for use outdoors

**2Y**

2 Year Guarantee

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31332E	Twin Work Light	220-240V	2 x 33W LED	8000	L:183mm W:540mm H:370mm

# HEAVY DUTY TRIPOD



## Key Features

- Tough powder coated finish to prevent rust and corrosion
- Bar clamp for fast and secure fitting
- Locking mechanism securely locks legs into position
- Collapsible for easy transportation
- Height adjustable up to 1.4m
- Die-cast aluminium
- Built-in cord wrap function for easy storage


Code	Description	Colour	Weight	Dimensions
SXLS31333E	Heavy duty tripod	Black	2.24kg	Dia:780mm H:1400mm





### Key Features

- Durable ABS with heavy duty rubber surround
- 25% / 50% / 100% / OFF brightness modes
- 1m H05RN-F 3G 1.0mm charging cable with IEC connector
- 2 hours run time at full brightness / 50% 5 hours / 25% 8 hours
- 4-5 hours charge time
- 15,000 hours LED lifetime



Class 2 0.76kg

## RECHARGEABLE Work Light

6000K

Daylight  
White

LED

Integral LED



Re-chargeable

IP54

Splashproof  
from any angle

2Y

2 Year  
Guarantee

Code	Description	Voltage	Battery	Lamp	Lumen	Dimensions
SXLS31329E	Rechargeable Work Light	220-240V	3.7V 4400mAh	10W LED	800	L:58mm W:158mm H:225mm
SXLS31330E	Rechargeable Work Light	220-240V	3.7V 8800mAh	20W LED	1500	L:58mm W:158mm H:225mm



SXLS31336E



## Key Features

- Durable die-cast body with plastic protective bumpers
- Foldable stand for easy storage and transportation
- 1.8m H05RN-F 3C 1.0mm cable
- 20,000 hours lifetime



Class 1

## FOLDING Work Light

6000K

Daylight  
White

LED

Integral LED

IP65

Ideal for use  
outdoors

1.8m

1.8 Meter  
Cable

2Y

2 Year  
Guarantee

Code	Description	Voltage	Lamp	Lumen	Weight	Dimensions
SXLS31334E	Folding Work Light	220-240V	10W LED	800	1.6kg	L:235mm W:276mm H:283mm
SXLS31335E	Folding Work Light	220-240V	20W LED	1500	1.7kg	L:245mm W:292mm H:295mm
SXLS31336E	Folding Work Light	220-240V	30W LED	2100	1.84kg	L:255mm W:332mm H:295mm
SXLS31337E	Folding Work Light	220-240V	50W LED	3900	1.92kg	L:255mm W:322mm H:295mm



SXLS31340E



### Key Features

- 220-240V ~ 50Hz
- Durable die-cast body with plastic protective bumpers
- 30% / 50% / 100% / OFF brightness modes
- Foldable stand for easy storage and transportation
- 1.5m H05RN-F 3G 1.0mm charging cable
- USB charging port with Android & IOS compatibility
- 20,000 hours LED lifetime



Class 3

## RECHARGEABLE

### Folding Work Light

<b>6000K</b>	<b>LED</b>	Re-chargeable	<b>IP65</b>	<b>2Y</b> 2 Year Guarantee
Daylight White	Integral LED	Ideal for use outdoors		


Code	Description	Battery	Charge-Time	Run-Time	Lamp	Lumen	Weight	Dimensions
SXLS31338E	Rechargeable Folding Work Light	2 x 2200mAh	5 Hours	3 Hours	8W LED	600	1.6kg	L:235mm W:276mm H:283mm
SXLS31339E		4 x 2200mAh	5 Hours	4 Hours	18W LED	1350	1.7kg	L:245mm W:292mm H:295mm
SXLS31340E		6 x 2200mAh	5 Hours	4 Hours	24W LED	1800	1.8kg	L:255mm W:332mm H:295mm





### Key Features

- Durable die-cast body with plastic protective bumpers
- Heavy duty extendable tripod
- 3m H05RN-F 3C 1.0mm cable
- 20,000 hours lifetime



Class 1 4.45kg

## TWIN LED

### Work Light with Tripod

<b>6000K</b> Daylight White	<b>40W LED</b> 2 x 20W Integral LED	<b>3000 Lumens</b> 75lm/W	<b>IP65</b> Ideal for use outdoors	<b>3m</b> 3 Meter Cable	<b>2Y</b> 2 Year Guarantee
--------------------------------	--	------------------------------	---------------------------------------	----------------------------	-------------------------------

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31540E	Twin Work Light with Tripod	220-240V	2 x 20W LED	3000	Dia:1000mm H:1680mm








### Key Features

- Durable ABS / PC body
- 10 x E27 lampholders with protective guards
- 22m H05RN-F 3G 1.5mm cable
- 2m lampholder spacing
- 10 x 10W LED lamps included
- Available in 110V & 240V versions



Class 1 7.76kg

## FESTOON

10 Light

6500K

Daylight White

10W  
LED

10 x 10W LED lamps included

800  
Lumens

800 lumen per lamp

IP44

Splashproof

22m

22 Meter Cable

2Y

2 Year Guarantee


Code	Description	Voltage	Lamp	Lumen	Dimensions (Each Head)
SXLS31361E	10 Light Festoon	220-240V	10 x 10W Max LED E27 GLS	800	H:182mm Dia:115mm
SXLS31361ES	10 Light Festoon	110V	10 x 10W Max LED E27 GLS	800	H:182mm Dia:115mm





### Key Features

- Durable ABS / PC construction
- 10 x 8W LED lamps
- 22m H05RN-F 3G 1.5mm cable
- 2m lampholder spacing
- Available in 110V & 240V versions



Class 1 7.76kg

## LED FESTOON

10 Light

**6500K**

Daylight  
White

**8W**  
*LED*

Integral LED

**640**  
Lumens

640 lumen  
per lamp

**IP44**

Splashproof

**22m**

22 Meter  
Cable

**2Y**

2 Year  
Guarantee

Code	Description	Voltage	Lamp	Lumen	Dimensions (Each Head)
SXLS31361E	10 Light LED Festoon	220-240V	10 x 8W LED	10 x 640	H:67mm Dia:115mm
SXLS31362ES	10 Light LED Festoon	110V	10 x 8W LED	10 x 640	H:67mm Dia:115mm

# MARKETING.

At Forum we offer a variety of Point of Sale and Marketing material , from counter top , to wall board and ceiling displays. Please speak to your internal or local sales person for more details.





# INFORMATION

## LIGHTING TERMS

---

### Bathroom Zone

Suitability for a product to be installed near or in water.

### CCT

Correlated Colour Temperature.

### Colour Switchable

Colour temperature can be switched between 3000K to 4000K or 6000K.

### Cool White (CW) 4000K

Light with a CCT kelvin temperature of 4000K.

### Daylight White (DW) 6000K

Light with a CCT kelvin temperature of 6000K.

### Downlight

A luminaire designed to be installed in a ceiling, with the light source pointed vertically downwards.

### Floodlight

A luminaire featuring a wide beam angle, designed to provide illumination over a wide area.

### IK Rating

Indicates the protection against mechanical impact. Rated from IK00 to IK10.

### IP Rating

Ingress Protection Rating.

### Kelvin (K)

Kelvin is the scientific unit for measuring CCT.

### LED (Light Emitting Diode)

Emits light through the conversion of electrical energy.

### Lifetime

The definition of LED luminaire lifetime is the period in hours after which the luminaire no longer delivers the correct amount of light,

either insufficient light is produced or none at all. This may be a combination of many factors not limited to just the LED performance.

### Lumens (lm)

The quantity of light emitted from a light source that is visible. The higher the lumens, the brighter the light.

### LUX

A measure of the intensity of light, defined as 1lm /m<sup>2</sup>.

### Microwave Sensor

An active intrusion sensor that detects the movement of a person or object through a pattern of microwave energy

### Photocell

Sometimes known as a dusk to dawn sensor. The sensor reacts to the ambient light and will turn the fitting on when a pre-set light level is reached

### PIR Sensor

Passive Infrared Device, used to activate lighting when a person enters a room or area.

### Power Supply / Driver

Power source for the LED luminaire.

### RGB

Red, Green, Blue. Used to describe colour changing products that can be used to dynamically add colour to any environment.

### RGBW

Stands for Red, Green, Blue, White. Used to describe colour changing products that can be used to dynamically add colour to any environment. Can also be run on white when natural lighting is required.

### Spotlight

A light source featuring a narrow beam angle, designed to allow highlighting or illumination of specific features in an area.

### Task Lighting

Lighting specifically designed to provide functional illumination of an environment.

### Warm White (WW) 3000K

Light with a CCT kelvin temperature of 3000K.

### Watt (W)

The unit of electrical power stating the amount of electricity consumed by the product.

### Work Lighting

Lighting specifically designed to provide functional illumination of a work site environment.

# COLOUR TEMPERATURE

## GUIDE

LEDs make it possible to have a choice of white colours or 'tones'. This allows easy customisation of an area to bring out the best in the materials and design of a room. With standard white LED lighting, these tones range from warm-yellow, to daylight-blue light, with options in between. The graphic below is a reference that starts at a warm yellow colour on the left and fades into a blue colour on the right.

Colour temperature ratings describe the tones of white light available. Colour temperature options range from 2000-3000K for Warm White lighting, 3100-4500 for Cool White lighting and 4600-6500 for Daylight White lighting. It can be a tricky decision to know what is best for your installation, but our skilled technical sales team are on hand to guide you through choosing the perfect white tone for your room.



Colour temperature	2000-3000K	3100-4500K	4600-6500K
Light appearance	Warm White	Cool White	Daylight White
Best for	Warmer whites are generally preferred for creating a more relaxed environment in dining, living or reception areas	Cool white is a good choice for retail and office environments where a simulated natural, outdoor light is preferred. Use in contemporary kitchens and bathroom to complement décor	Perfect for industrial, security, garages and task lighting where the most natural lighting is required

# IP RATING

## INGRESS PROTECTION

Ingress protection rating (IP); this relates to the degree of protection the light provides against solid objects and water ingress. IP ratings are relevant to anywhere that moisture is prevalent, such as bathrooms, utility rooms and outdoor environments. Written as IPXX, the first X denotes the level of protection offered from dust; the second X denotes the level of protection offered from moisture. The higher the numbers are, the better the protection will be.

### SOLID OBJECTS

0	No special protection
1	Protection from a large part of the body such as a hand (but no protection from deliberate access); from solid objects greater than 50mm in diameter
2	Protection against fingers or other objects not greater than 80mm in length and 12mm in diameter
3	Protection from entry by tools, wires etc, with a diameter of 2.5mm or more
4	Protection against solid bodies larger than 1mm
5	Protection against dust that may harm equipment
6	Totally dust-tight; no ingress of dust

### LIQUIDS

0	No special protection
1	Protected against dripping water; vertically falling drops
2	Protected against vertical falling drops of water with enclosure tilted up to 15 degrees from the vertical; limited ingress permitted
3	Protected against sprays of water up to 60 degrees from the vertical; limited ingress permitted
4	Protection from splashing water from any direction
5	Protection against low pressure water jets (all directions)
6	Protection against high pressure water jets and waves
7	Protection against temporary immersion
8	Watertight against the effects of immersion in water under pressure for long periods

Ingress protection ----- **IP65**



# BATHROOM ZONING

## WHAT IS BATHROOM ZONING?


All bathroom lighting installations must comply to the guidelines set out in Amendment 1 of the 17th edition of the IEE Wiring Regulations (BS7671). The bathroom is divided into zones, with prescribed minimum IP ratings for the light fittings in each zone. To illustrate IP zoning regulations, the bathroom area is divided up into areas or 'ZONES'. Light fittings are then assigned an 'IP rating' which indicates how much protection they provide against ingress of water and other particles. Each zone has a minimum IP requirement that must be met if a fitting is to be installed in this area.

### Zone 0 $\geq$ IPX7

Inside bath or shower. Only 12V AC rms or 30V ripple-free DC SELV fittings with a minimum rating of IPX7 (protected against immersion in water). Transformers must be sited outside Zones 0,1,2.

### Zone 1 $\geq$ IPX5

The area above the bath or shower up to a height of 2.25 metres. Fittings must be rated at IPX5 or higher (protected from jets of water).

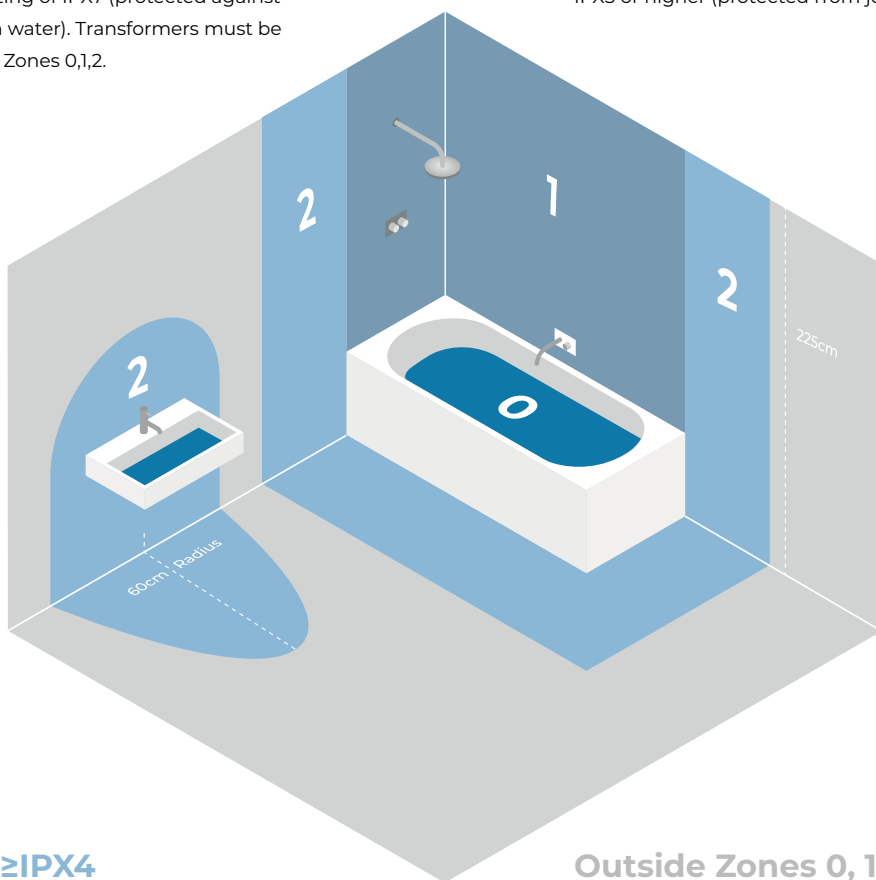

### Zone 2 $\geq$ IPX4

Covers an area 0.6 metres wide immediately next to, and all around Zone 1. The 60cm area around washbasins should also be treated as zone 2. The minimum rating is IPX4. If there is a likelihood of water jets being used for cleaning purposes in Zone 2, a minimum of IPX5 is required.

### Outside Zones 0, 1 & 2

Covers any area outside Zones 0, 1 and 2. There is no IP requirement in this zone. Bathrooms are allowed to contain a socket outlet, this must be located 3 metres outside Zone 1. Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA RCD protection.

# INDEX.

Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without any liability on the part of the Company. Goods supplied may vary in detail from the illustrations, drawings, measurements and descriptions set out in the Company's sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is, subject to these Conditions, that as understood by general usage in the trade. For full terms and conditions of sale consult your distributor.

## INDEX (ALPHABETICAL)

CUL-21624	288	CUL-26336	305	CUL-35861	293
CUL-21625	289	CUL-26337	305	CUL-35864	294
CUL-21626	290	CUL-26338	305	CUL-35865	295
CUL-21627	291	CUL-26339	305	CZ-20947-BLK	123
CUL-21637	299	CUL-26340	305	CZ-25142-BLK	122
CUL-21638	299	CUL-26341	305	CZ-25143-BLK	138
CUL-21639	299	CUL-26342	305	CZ-25144-BLK	137
CUL-21643	305	CUL-26344	301	CZ-25145-BLK	112
CUL-21645	305	CUL-26345	300	CZ-25146-BLK	111
CUL-21647	305	CUL-26346	302	CZ-25148-BLK	111
CUL-21649	305	CUL-26465	311	CZ-25150-BLK	113
CUL-21651	305	CUL-26465-WW	311	CZ-26743-BLK	114
CUL-21653	305	CUL-27858-SST	309	CZ-29191-ATR	147
CUL-21656	301	CUL-30698	306/173	CZ-29192-ATR	145
CUL-21658	300	CUL-30699	306/173	CZ-29193-ATR	143
CUL-21660	302	CUL-30700	306/173	CZ-29319-BLK	141
CUL-21661	296	CUL-30701	306/173	CZ-29319-SST	141
CUL-21662	296	CUL-30702	306/173	CZ-29320-BLK	139
CUL-21663	296	CUL-30703	306/173	CZ-29320-SST	139
CUL-21664	296	CUL-30704	307/174	CZ-29321-BLK	142
CUL-21665	298	CUL-30705	307/174	CZ-29321-SST	142
CUL-21666	298	CUL-30706	307/174	CZ-31740-BLK	133
CUL-25217	288	CUL-30707	307/174	CZ-31743-BLK	131
CUL-25218	289	CUL-30708	307/174	CZ-31744-BLK	136
CUL-25219	290	CUL-30709	307/174	CZ-31745-BLK	131
CUL-25220	291	CUL-30710	308/175	CZ-31746-BLK	132
CUL-25317	288	CUL-30711	308/175	CZ-31747-BLK	148
CUL-25318	289	CUL-33996-BLK	305	CZ-31748-BLK	114
CUL-25319	290	CUL-33996-WHT	305	CZ-31749-BLK	149
CUL-25320	291	CUL-33997-BLK	303	CZ-31750-BLK	129
CUL-25321	296	CUL-33997-WHT	303	CZ-31751-BLK	130
CUL-25322	296	CUL-33998-BLK	304	CZ-31752-BLK	
CUL-25323	296	CUL-33998-WHT	304	CZ-31806-BLK	151
CUL-25324	296	CUL-34223-CCT	297	CZ-31811-BLK	116
CUL-26332	305	CUL-34224-CCT	297	CZ-31812-BLK	117
CUL-26333	299	CUL-34225-CCT	297	CZ-33397-BLK	125
CUL-26334	299	CUL-34226-CCT	297	CZ-33461-BLK	118
CUL-26335	299	CUL-35860	292	CZ-34014-BLK	127

## INDEX (ALPHABETICAL)

CZ-34015-BLK	127	ELA-28103-OPL	182/243	ELA-34857	157
CZ-34016-BLK	128	ELA-28104-OPL	182/243	ELA-34858	157
CZ-34017-BLK	128	ELA-28414-WHT	172	ELA-34859	157
CZ-34023-BLK	125	ELA-28415-WHT	172	ELA-34860	159
CZ-34024-BLK	121	ELA-28416-WHT	172	ELA-34861	159
CZ-34025-BLK	121	ELA-28417-WHT	172	ELA-34862	159
CZ-34026-BLK	119	ELA-28418-WHT	172	ELA-34866	181/242
CZ-34027-BLK	119	ELA-28419-WHT	172	ELA-34867	181/242
CZ-34402	152	ELA-28420-WHT	172	ELA-34868	181/242
CZ-34403	152	ELA-28421-WHT	172	ELA-34869	181/242
CZ-34404	152	ELA-34280	157	ELA-34871	160
CZ-34405	153	ELA-34281	157	ELA-34872	161
CZ-34406	153	ELA-34282	157	ELA-34873	163
CZ-34407	153	ELA-34283	159	ELA-34874	
CZ-35704-BLK	135	ELA-34284	159	ELA-34875	
CZ-35705-BLK	134	ELA-34285	159	ELA-34876	
CZ-35742-BLK	115	ELA-34286	168	ELA-35692	176
ELA-27465-BCHR	183/246	ELA-34287	168	ELA-35693	176
ELA-27465-CHR	183/246	ELA-34288	170	ELA-35694	176
ELA-27465-MBLK	183/246	ELA-34289	170	ELA-35695	176
ELA-27465-SATBRS	183/246	ELA-34290	160	ELA-35696	176
ELA-27465-SCHR	183/246	ELA-34291	161	ELA-35697	176
ELA-27465-WHT	183/246	ELA-34292	168	ELA-35698	176
ELA-27466-BCHR	184/247	ELA-34293	168	ELA-35699	176
ELA-27466-CHR	184/247	ELA-34294	170	ELA-35700	176
ELA-27466-MBLK	184/247	ELA-34295	170	ELA-35701	176
ELA-27466-SATBRS	184/247	ELA-34296	163	ELA-35702	176
ELA-27466-SCHR	184/247	ELA-34298	170	ELA-35703	176
ELA-27466-WHT	184/247	ELA-34299	170	ELA-35743	177
ELA-27467-BCHR	185/248	ELA-34300	167	ELA-35744	177
ELA-27467-CHR	185/248	ELA-34301	167	ELA-35745	177
ELA-27467-MBLK	185/248	ELA-34302	167	ELA-35746	177
ELA-27467-SATBRS	185/248	ELA-34303	167	ELA-35747	171
ELA-27467-SCHR	185/248	ELA-34304	167	ELA-35748	171
ELA-27467-WHT	185/248	ELA-34305	167	ELA-35749	171
ELA-28093-CHR	182/243	ELA-34306	166	ELA-35750	165
ELA-28101-OPL	182/243	ELA-34307	166	ELA-35751	165
ELA-28102-OPL	182/243	ELA-34308	166	ELA-35752	165

# INDEX (ALPHABETICAL)

ELA-35753	165	INL-31790-BCR	319	INL-598310-SNIC	316
INL-23519-BLK	329	INL-33136-SMK	337	INL-598410-SNIC	315
INL-23519-GRY	329	INL-33137-CHAMP	337	INL-740000-SNIC	314
INL-23519-HERR	329	INL-33139-MBLK	337	INL-C35L-LED-SES-CLR	341
INL-23519-RED	329	INL-33140-ACOP	337	INL-C35L-LED-SES-TNT	341
INL-27988-ABRS	331	INL-33818-ABRS	335	INL-G80-LED-BC-CLR	340
INL-27988-ACOP	331	INL-33818-ACOP	335	INL-G80-LED-BC-TNT	340
INL-27988-BRZ	331	INL-33818-MBLK	335	INL-G80-LED-ES-CLR	340
INL-27988-PEW	331	INL-33818-MGRY	335	INL-G80-LED-ES-TNT	340
INL-27988-SNIC	331	INL-33818-PNIC	335	INL-G95-LED-BC-CLR	341
INL-28201-BCHR	317	INL-33819-ABRS	335	INL-G95-LED-BC-TNT	341
INL-28202-BCHR	317	INL-33819-ACOP	335	INL-G95-LED-ES-CLR	341
INL-28203-BCHR	317	INL-33819-MBLK	335	INL-G95-LED-ES-TNT	341
INL-28204-BCHR	319	INL-33819-MGRY	335	INL-ST64-LED-BC-CLR	340
INL-28205-BCHR	318	INL-33819-PNIC	335	INL-ST64-LED-BC-TNT	340
INL-28573	344	INL-34028-AMB	339	INL-ST64-LED-ES-CLR	340
INL-28574	344	INL-34029-AMB	339	INL-ST64-LED-ES-TNT	340
INL-28575	344	INL-34030-AMB	339	SP-25201-CHR	276
INL-28576	344	INL-34031-AMB	339	SP-25202-CHR	277
INL-28577	344	INL-34150-3K	345	SP-25203-CHR	278
INL-28578	344	INL-34150-4K	345	SP-25204-CHR	274
INL-29464-CW	346	INL-34151-3K	345	SP-25210-CHR	284
INL-29464-WW	346	INL-34151-4K	345	SP-25211-CHR	285
INL-29465-CW	346	INL-34400	347	SP-25253-CHR	279
INL-29465-WW	346	INL-34401	347	SP-25254-CHR	282
INL-31723-BLK	323	INL-34556-WHT	327	SP-25255-CHR	283
INL-31723-SATBRS	323	INL-34557-WHT	326	SP-25256-CHR	281
INL-31723-SNIC	323	INL-34558-WHT	328	SP-31449-CHR	280
INL-31723-WHT	323	INL-34942-SATBRS	342	SP-31450-CHR	275
INL-31775-BLK	321	INL-34942-SATBRS	342	SPA-19713-BRS	199
INL-31775-SATBRS	321	INL-35728	347	SPA-19713-CHR	199
INL-31775-SNIC	321	INL-36012	343	SPA-19714-BRS	197
INL-31775-WHT	321	INL-36013	343	SPA-19714-CHR	197
INL-31776-BLK	322	INL-36014	343	SPA-20182-BRS	200
INL-31776-SATBRS	322	INL-36015	343	SPA-20182-CHR	200
INL-31776-SNIC	322	INL-36016	343	SPA-20279-CHR	212
INL-31776-WHT	322	INL-36017	343	SPA-20280-CHR	212
INL-31789-ACOP	333			SPA-20829-CHR	213

# INDEX (ALPHABETICAL)

SPA-20829-MBLK	213	SPA-30993-SATBRS	253/325	SPA-34046-BRS	234
SPA-20829-SATBRS	213	SPA-30993-SNIC	253/325	SPA-34046-CHR	234
SPA-20831-BRS	201	SPA-31292-CHR	231	SPA-34046-SATBLK	234
SPA-20831-CHR	201	SPA-31306-CHR	210	SPA-34046-SNIC	234
SPA-22560	229	SPA-31306-MBLK	210	SPA-34047-BRS	234
SPA-22560-BRS	229	SPA-31306-SBRS	210	SPA-34047-CHR	234
SPA-22560-MBLK	229	SPA-31309-CHR	211	SPA-34047-SATBLK	234
SPA-23617-CHR	225	SPA-31309-MBlk	211	SPA-34047-SNIC	234
SPA-24467-CHR	203	SPA-31309-SBRS	211	SPA-34049-BRS	235
SPA-24467-SATBRS	203	SPA-31725-CHR	209	SPA-34049-CHR	235
SPA-24468-CHR	203	SPA-31725-SATBRS	209	SPA-34049-SATBLK	235
SPA-24468-SATBRS	203	SPA-31726-CHR	207	SPA-34049-SNIC	235
SPA-24677-CHR	189	SPA-31726-SATBRS	207	SPA-34050-BRS	235
SPA-24678-CHR	190	SPA-31730-CHR	217	SPA-34050-CHR	235
SPA-24869-BRS	202	SPA-31731-CHR	216	SPA-34050-SATBLK	235
SPA-24869-CHR	202	SPA-31732-CHR	215	SPA-34050-SNIC	235
SPA-24870-CHR	202	SPA-31733-CHR	214	SPA-34864	269
SPA-24870-SATBRS	202	SPA-31735-CHR	219	SPA-34865	271
SPA-24871-BRS	202	SPA-31736-CHR	223	SPA-35080-CHR	226
SPA-24871-CHR	202	SPA-31737-CHR	224	SPA-35081-CHR	227
SPA-27401	232	SPA-31777-CHR	220	SPA-35706	263
SPA-27405-BRS	230	SPA-31780-CHR	218	SPA-35707	265
SPA-27405-CHR	230	SPA-33929-CHR	191	SPA-35708	267
SPA-27405-MBLK	230	SPA-33930-CHR	193	SPA-35709	239
SPA-28326-CHR	205	SPA-33931-CHR	195	SPA-35710	240
SPA-28327-CHR	205	SPA-33932-CHR	195	SPA-35711	237
SPA-29195-CHR	205	SPA-33974-CHR	194	SPA-35712	237
SPA-30781-CHR	221	SPA-34008-WHT	237	SPA-35713	239
SPA-30782-CHR	222	SPA-34009-WHT	240	SPA-35714	239
SPA-30841-MBLK	244	SPA-34010-SNIC	237	SPA-35715	239
SPA-30841-MWHT	244	SPA-34011-SNIC	240	SPA-35716	239
SPA-30842-CHR	244	SPA-34012-CHR	237	SPA-35717	240
SPA-30842-SCHR	244	SPA-34013-CHR	240	SPA-35718	240
SPA-30842-SCHR	244	SPA-34035	257	SPA-35719	241
SPA-30843-MWHT	245	SPA-34036	258	SPA-35720	241
SPA-30844-CHR	245	SPA-34037	259	SPA-35721	241
SPA-30993-CHR	253/325	SPA-34038	260	SPA-35722	241
SPA-30993-MBLK	253/325	SPA-34039	261	SPA-35723	245

# INDEX (ALPHABETICAL)

SPA-35724	245	ZN-20930-BLK	24	ZN-29179-ANTH	10
SPA-35725	245	ZN-20930-SST	24	ZN-29179-BLK	10
SPA-35726	245	ZN-20941-Anth	9	ZN-29179-COP	10
SPA-35727	245	ZN-20941-BLK	9	ZN-29179-SST	10
SPA-36920-CHR	254	ZN-20941-COP	9	ZN-29180-BLK	15
SPA-6888.014	251	ZN-20941-POLSST	9	ZN-29180-SST	15
SPA-6888.014-SATBRS	251	ZN-20941-SST	9	ZN-29181-BLK	25
SPA-AS-2831-C	233	ZN-20941-WHT	9	ZN-29181-SST	25
SPA-HB2803	256	ZN-20942-SST	53	ZN-29184-BLK	65
SPA-PR-12744	250	ZN-20943-BLK	49	ZN-29185-WHT	105
SPA-PR-17146	249	ZN-20944-ANTH	45	ZN-29186-WHT	107
SPA-PR13145	255	ZN-20944-BLK	45	ZN-29187-WHT	106
SPA-PR13145-MBLK	255	ZN-20944-SIL	45	ZN-29189-ATR	31
SPA-PR13145-SATBRS	255	ZN-20945-BLK	48	ZN-29190-ATR	32
SXLS31322E	355	ZN-20945-SST	48	ZN-29347-BLK	41
SXLS31322ES	355	ZN-20955-BLK	59	ZN-29347-POLALU	41
SXLS31324E	351	ZN-20957-BLK	57	ZN-29992-BLK	28
SXLS31324ES	351	ZN-20965-SST	65	ZN-29993-BLK	22
SXLS31325E	356	ZN-20973-GRY	29	ZN-29995-BLK	20
SXLS31325ES	356	ZN-23454-BLK	75	ZN-29996-BLK	21
SXLS31326E	353	ZN-23454-WHT	75	ZN-29997-BLK	67
SXLS31329E	361	ZN-24507-SST	52	ZN-31385	80
SXLS31330E	361	ZN-25152-BLK	94	ZN-31386	80
SXLS31331E	357	ZN-25152-WHT	94	ZN-31387	81
SXLS31332E	359	ZN-25153-WHT	100	ZN-31757-ANTH	55
SXLS31333E	360	ZN-25154-WHT	98	ZN-31758-ANTH	27
SXLS31334E	363	ZN-25155-WHT	102	ZN-31758-POLALU	27
SXLS31335E	363	ZN-25156-BLK	104	ZN-31759-ANTH	26
SXLS31336E	363	ZN-25340-SST	64	ZN-31759-POLALU	26
SXLS31337E	363	ZN-25463-BLK	63	ZN-31767-BLK	23
SXLS31338E	365	ZN-25464-BLK	62	ZN-31768-BLK	23
SXLS31339E	365	ZN-26536-BLK	13	ZN-31786-WHT	101
SXLS31340E	365	ZN-26536-COP	13	ZN-31787-WHT	96
SXLS31361E	369	ZN-26536-SST	13	ZN-31805-WHT	103
SXLS31361ES	369	ZN-26536-WHT	13	ZN-31807-TBLK	50
SXLS31362E	371	ZN-28708-BLK	64	ZN-31808-POLSST	51
SXLS31362ES	371	ZN-28708-SST	64	ZN-31809-SST	51
SXLS31540E	367	ZN-29177-WHT	99	ZN-32069-BLK	44

## INDEX (ALPHABETICAL)

ZN-32070-BLK	47	ZN-35684	80
ZN-33394-BLK	69	ZN-35685-BLK	35
ZN-33394-SST	69	ZN-35686-BLK	33
ZN-33460-BLK	39	ZN-35687-BLK	72
ZN-33460-SST	39	ZN-35688-BLK	73
ZN-33579-BLK	95	ZN-35689-BLK	71
ZN-33579-WHT	95	ZN-35690-WHT	92
ZN-33615-BLK	97	ZN-35691-BLK	93
ZN-33615-WHT	97	ZN-35738-BLK	66
ZN-33992-BLK	60	ZN-35739-BLK	18
ZN-33993-BLK	60	ZN-35740-BLK	17
ZN-33994-BLK	61	ZN-35741-BLK	19
ZN-33995-BLK	61	ZR-32297-BLK	86
ZN-34002-SST	43	ZR-32298-BLK	87
ZN-34003-BLK	43	ZR-32299-BLK	88
ZN-34018-SBLK	16	ZR-32300-BLK	89
ZN-34018-SST	16	ZR-32301-BLK	85
ZN-34019-ANTH	36	ZR-32302-BLK	86/87/88
ZN-34020-ANTH	37		
ZN-34022-BLK	11		
ZN-34022-SST	11		
ZN-34042-ANTH	31		
ZN-34043-ANTH	32		
ZN-34044-BLK	70		
ZN-34354-BLK	76		
ZN-34355-BLK	76		
ZN-34356-BLK	76		
ZN-34357-BLK	77		
ZN-34358-BLK	77		
ZN-34359-BLK	79		
ZN-34360-BLK	79		
ZN-34361-BLK	79		
ZN-34362-BLK	79		
ZN-34555-BLK	40		
ZN-34555-SST	40		
ZN-34870	83		
ZN-35593-BLK	33		
ZN-35594-BLK	35		





## Forum Lighting Solutions

Corse Mill, Corse Street,  
Oldham, OL9 9RJ, UK

**t** +44 (0) 161 359 4949

**f** +44 (0) 161 628 2831

**e** [info@forumlightingsolutions.com](mailto:info@forumlightingsolutions.com)

**w** [forumlightingsolutions.com](http://forumlightingsolutions.com)



[facebook.com/forumlightingsolutions](https://facebook.com/forumlightingsolutions)



[twitter.com/forumlightingsolutions](https://twitter.com/forumlightingsolutions)



[linkedin.com/forumlightingsolutions](https://linkedin.com/forumlightingsolutions)

