


Data sheet



Time / Immersion & General Purpose Time Switches

FST77 – 7 Day Fused Spur Timeswitch

Product Image & Line Diagram

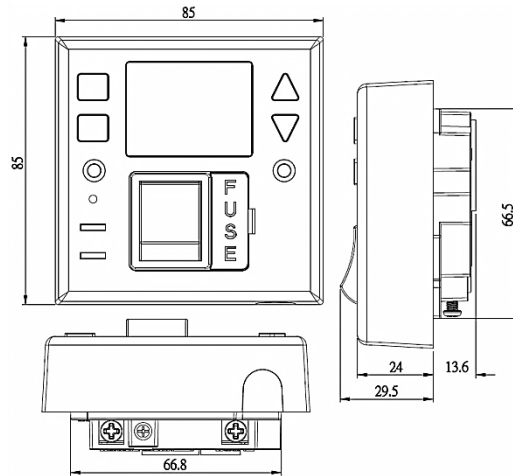

Technical Data

General	
Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface or recessed
Min Depth of Wall Box	25mm, Single gang back box or pattress
Contact Type	Normally open
Class Protection	Class 2
Program	7 Day weekly program (4 ON/OFF per day, 28 ON/OFF per week)
Number of Channels	1
Power Reserve	Yes, 720 Hours (Non-replaceable rechargeable Ni-MH battery)
Switch Rating	3kW Immersion Heaters. 750W Incandescent/Halogen, 500W Fluorescent, 200W LED, 100W CFL Lighting.
Rocker Switch	Double pole, 13A
Fuse	BS1362 13A (Supplied)
LED Indicators	Power, Output
Boost Function	Yes, 1 Hour or 2 Hour
Advance Function	Yes, Permanent or until next programmed operation
Operating Temperature	0°C to 40°C
Accessories (Included)	Instructions, Fittings
Accessories (Optional)	None
Dimensions	Height 85mm, Width 85mm, Depth 44mm
Construction	Casing: Polycarbonate
Weight	114g Unpacked
EAN	5012483012611
Designed In Accordance To	BS EN 60730-2-7, BS 1363-4 <small>Includes updates and amendments.</small>
Guarantee Period	5 Years



A theben Group Company

Article Number: FST77 DS230715V1

