




## Type 2 Surge Protection Kit

- Designed and tested for use with Lewden branded distribution boards.
- Suitable for use in TN-C-S (PME) / TN-S / TT network systems.
- Earth leakage free and may be connected before or after RCCB/RCBO circuit protection.
- 5-year warranty.
- Integral coloured flag indicating SPD health status.
- Supplied with 40A MCB & cables.

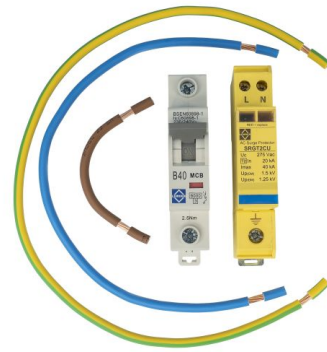

## SRG1VCU-KIT

TECHNICAL DATA		REGISTRY	
Surge protective class	Type 2	Net weight	0.30KG
Frequency	50-60Hz	Min order quantity	1
Earthing Systems	TN-C-S-(PME)	EAN Code	5026992043141
Earthing Systems	TN-S	Gross Weight	0.32KG
Earthing Systems	TT		
Recommender backup MCB	40A/50A B/C 6kA MCB		
Nm dischar. current(In)(8/20uS	20kA (L/N,L/PE)		
Nm dischar. current(In)(8/20uS	40kA (N/PE)		
Maximum discharge current	50kA (L/N)''		
Phase	1		
Modules Number	2		
Signalling contact	NO		
Execution	DIN RAIL MOUNTING		
		REFERENCE STANDARDS	STANDARDS
		EN 61643-11:2012	
		IEC 61643-11:2011	