

# PRODUCT DATASHEET

## SF CIRCULAR 400 S 24 W 4000 K IP44 WT

**SURFACE CIRCULAR 400 SENSOR | Wall and ceiling luminaire with IP44 and high frequency sensor**



---

### AREAS OF APPLICATION

- Corridors
- Stairways
- Bathrooms
- Foyers

---

### PRODUCT BENEFITS

- Easy adjustment of sensor range, daylight detection and hold time
- High luminous efficacy
- Energy savings of up to 55 % compared to luminaires that use CFL
- Easy and quick installation
- Very homogenous light
- Clear cover protects the reflector against dust and contact
- 3 years guarantee

---

### PRODUCT FEATURES

- High frequency sensor for daylight and motion detection
- Beam angle: 120°
- Type of protection: IP44
- Impact resistance: IK03
- Metal housing, PMMA cover



– Ambient temperature in operation: -20...+40 °C

## TECHNICAL DATA

### Electrical data

Nominal wattage	24.00 W
Operating mode	Integrated LED driver
Nominal voltage	220...240 V
Power factor $\lambda$	>0.5
Mains frequency	50/60 Hz
Inrush current	15.0 A
Total harmonic distortion	< 120 %
Inrush current time $T_{h50}$	200 $\mu$ s

### Luminaire control gear data

Output current	172 mA
Flicker-free	Yes
Max. no. of lum. on circuit break. B16 A	30
Max. no. of lum. on circuit break. C10 A	25
Max. no. of lum. on circuit break. C16 A	41

### Photometrical data

Color temperature	4000 K
Luminous flux	1920 lm
Luminous efficacy	80 lm/W
Standard deviation of color matching	$\leq 5$ sdcn
Light color (designation)	Cool White
Color rendering index Ra	>80


### Light technical data

Beam angle	120 °
------------	-------

### Luminaire sensor data

Type of sensor	Motion / Light
Sensor technology	Microwave
Sensor detection angle	110 °
Detection range of motion sensor	8 m
Detection threshold of daylight sensor	25 lx
Sensor controlled switching time	5 s/1 min/3 min/10 min
Sensor IP rating	IP44

Dimensions & weight

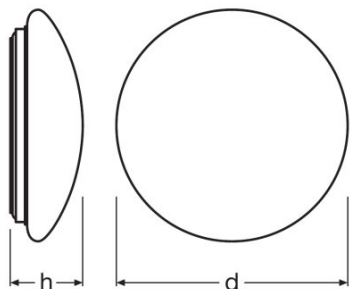

<b>Diameter</b>	400.0 mm
<b>Height</b>	120.0 mm
<b>Product weight</b>	752.00 g

Colors & materials

<b>Body material</b>	Steel
<b>Housing color</b>	White
<b>Product color</b>	White
<b>Cover material</b>	Polymethylmethacrylate (PMMA)

Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+40 °C
----------------------------------	--------------

Lifespan

<b>Lifespan L70/B50 at 25 °C</b>	30000 h
<b>Lifespan L80/B10 at 25 °C</b>	30000 h
<b>Lifespan L90/B10 at 25 °C</b>	15000 h

Additional product data

<b>Mounting type</b>	Surface
<b>Mounting location</b>	Ceiling / Wall

Capabilities

<b>Dimmable</b>	No
<b>Type of connection</b>	Screw terminal, 3-Pole
<b>LED module replaceable</b>	Not replaceable

Certificates & standards

<b>Protection class IK (shock resistance)</b>	IK03
---	------

<b>Glow Wire Test according to IEC 695-2-1</b>	650 °C
<b>Photobiological safety group EN62778</b>	RG 0
<b>Protection class</b>	I
<b>Type of protection</b>	IP44
<b>Standards</b>	CE/CB/TÜV SÜD/EAC/RoHS

## EQUIPMENT / ACCESSORIES

– Replacement cover optional available

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075080119	Folding carton box 1	440 mm x 440 mm x 135 mm	1134.00 g	26.14 dm <sup>3</sup>
4058075080126	Shipping carton box 5	660 mm x 460 mm x 460 mm	6976.00 g	139.66 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.